

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 152.1 mm
- Effective Area (A_e): 226.4mm²
- Effective Area (A_{Min}): 226.4mm²
- Effective Volume (V_e): 34431mm³

Approximate weight : 166g/pc




T6318OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	3700+30%/-20%	CF196T6318
CF139	2100 ±20%	3900+30%/-20%	CF139T6318
CF130	3000 ±20%	5600+30%/-20%	CF130T6318
CF195A	5000 ±20%	9300+30%/-20%	CF195AT6318
CF265	5000 ±20%	9300+30%/-20%	CF265T6318
CF190	6000 ±20%	11200+30%/-20%	CF190T6318
CF197	7000 ±20%	13100+30%/-20%	CF197T6318
CF199	9000 ±20%	16800 ±30%	CF199T6318

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	63.0	64.3	61.7
B	38.0	38.8	37.2
C	18.5	19.0	18.0

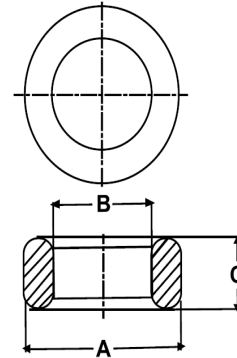

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf