

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 130.7 mm
- Effective Area (A_e): 288.3mm²
- Effective Area (A_{Min}): 288.3mm²
- Effective Volume (V_e): 37681mm³

Approximate weight : 200g/pc




T6020OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	5500+30%/-20%	CF196T6020
CF139	2100 ±20%	5800+30%/-20%	CF139T6020
CF130	3000 ±20%	8300+30%/-20%	CF130T6020
CF195A	5000 ±20%	13800+30%/-20%	CF195AT6020
CF265	5000 ±20%	13800+30%/-20%	CF265T6020

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	60.0	61.0	59.0
B	30.0	30.8	29.2
C	20.0	20.5	19.5

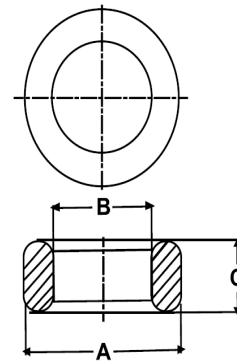

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf