

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 392.6mm
- Effective Area (A_e): 450.6mm²
- Effective Area (A_{Min}): 450.6mm²
- Effective Volume (V_e): 176906mm³

Approximate weight : 870g/pc




T15219 OL (Un-coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Approx. (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	2900 +30%/-20%	CF196T15219
CF139	2100 ±20%	3000 +30%/-20%	CF139T15219
CF130	3000 ±20%	4300 +30%/-20%	CF130T15219
CF265	5000 ±20%	7200 +30%/-20%	CF265T15219
CF195A	5000 ±20%	7200 +30%/-20%	CF195AT15219
CF190	6000 ±20%	8600 +30%/-20%	CF190T15219
CF197	7000 ±20%	10100 +30%/-20%	CF197T15219
CF199	9000 ±20%	10800 ±30%	CF199T15219

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	152.0	157.0	147.0
B	104.0	107.6	100.4
C	19.0	19.5	18.5

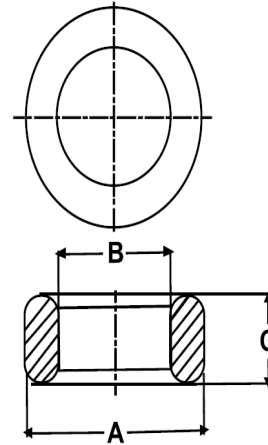

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf