

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 43.6 mm
- Effective Area (A_e): 33.6mm²
- Effective Area (A_{Min}): 33.6mm²
- Effective Volume (V_e): 1465mm³

Approximate weight : 7.9g/pc




T2007 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	1950+30%/-20%	CF196T2007
CF139	2100 ±20%	2000+30%/-20%	CF139T2007
CF130	3000 ±20%	2900+30%/-20%	CF130T2007
CF195A	5000 ±20%	4850+30%/-20%	CF195AT2007
CF265	5000 ±20%	4850+30%/-20%	CF265T2007
CF190	6000 ±20%	5800+30%/-20%	CF190T2007
CF197	7000 ±20%	6800+30%/-20%	CF197T2007
CF199	9000 ±20%	8700 ±30%	CF199T2007

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	20.0	20.4	19.6
B	10.0	10.25	9.75
C	7.0	7.3	6.7

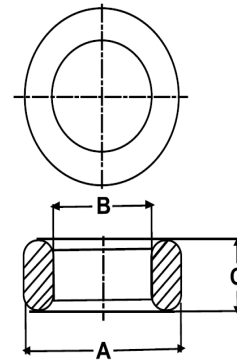

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf