



TECHNICAL
SPECIFICATIONS

Product Code	PMM2/M3-HI18-SCH
Dimension (mm) W x L x H	50x50x5
Material	PMMA
Fastening	Screw
Beam Angle	146° - 54° Medium, Type II
Type	8 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:
-YI 6 under hot/dry conditions
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &
MAINTENANCE

Working Temperature : -40° C ~ +100° C
Storage Temperature : -40° C ~ +100° C
Please handle or install lenses with wearing gloves.
Skin oils may damage lens or its optical characteristic.
Never use any commercial cleaning solvents on lenses , like alcohol.
If necessary, clean lenses wiht mild soap, water and soft cloth.


SAMSUNG LH351B

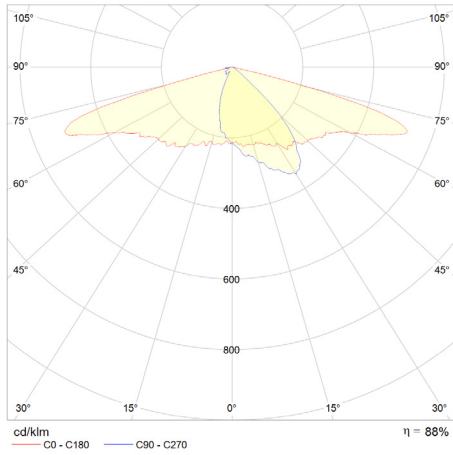


CREE XPG3

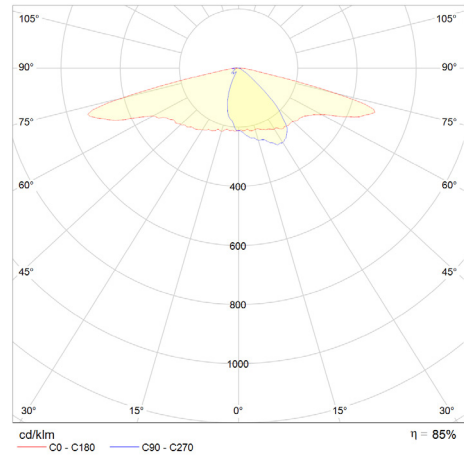


NICHIA NVSW219D

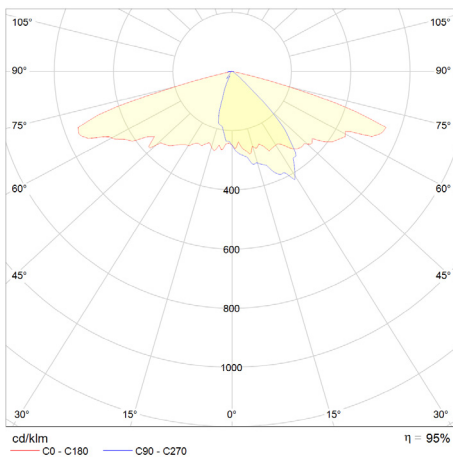


OSRAM OSLON SQUARE

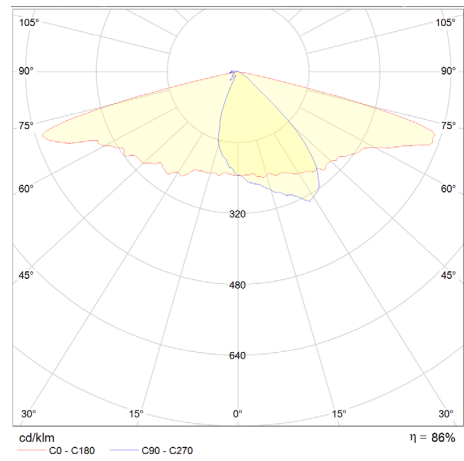



CREE XTE

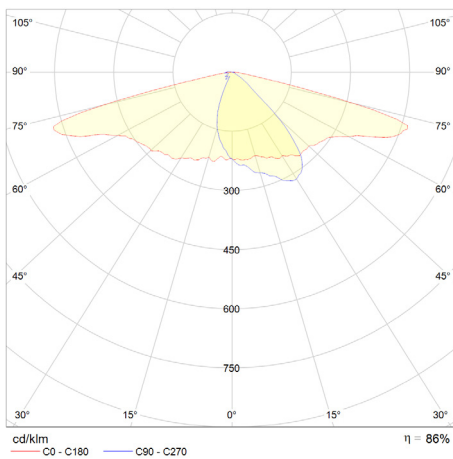

NICHIA NF2W 757 GR

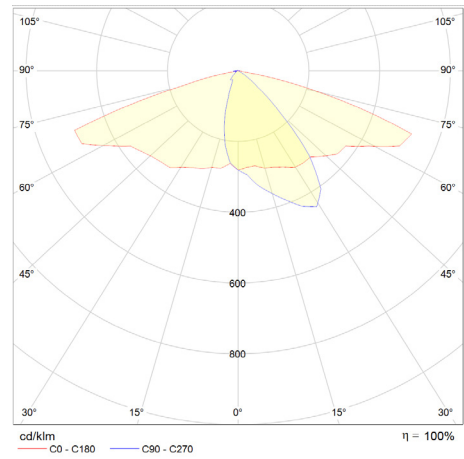

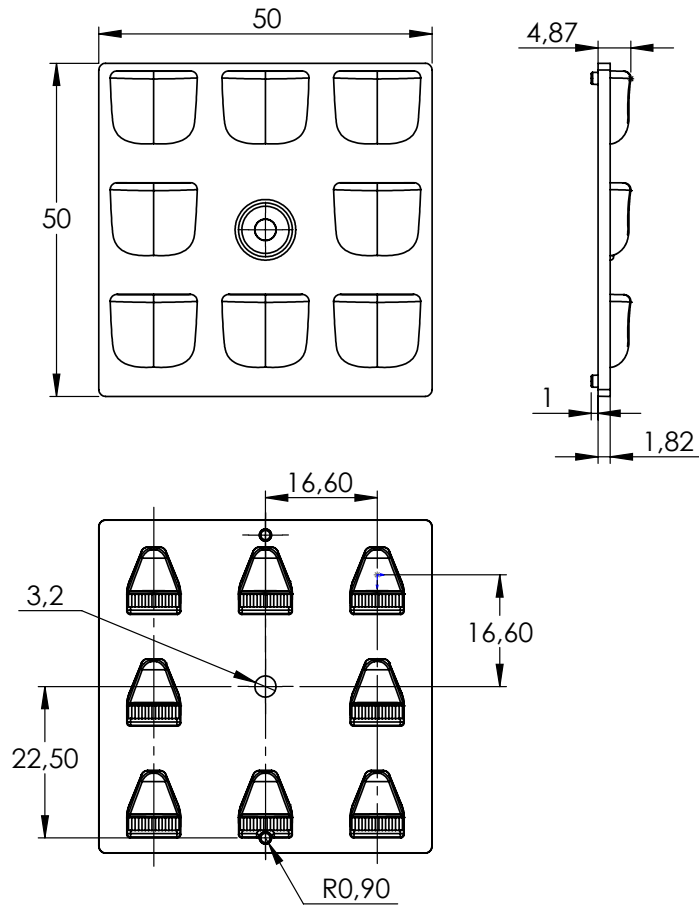

EMAGE [®]	UNIT mm	PART NO: PMM2/3HI18-SCH	 GENERAL TOLERANCES $\pm 0,2$ MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	6,74 g	1	
	DATE	22.06.2020	2	
			3	
		PAGE 1 / 1	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	7,5 Kg
Box Quantity	900 pcs

