

TECHNICAL  
SPECIFICATIONS

Product Code	PM040-HI22-SCH
Dimension (mm) W x L x H	50x50x11,4
Material	PMMA
Fastening	Screw
Beam Angle	40°
Type	4 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


SAMSUNG LH351B

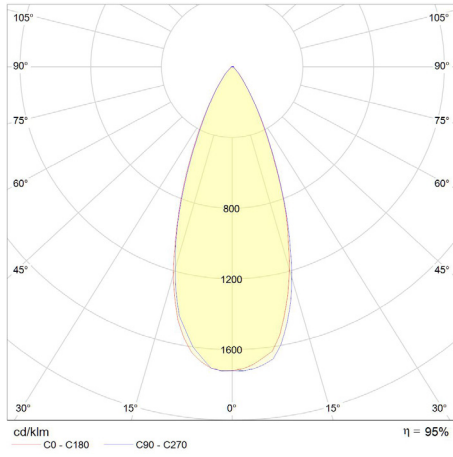


CREE XPG3

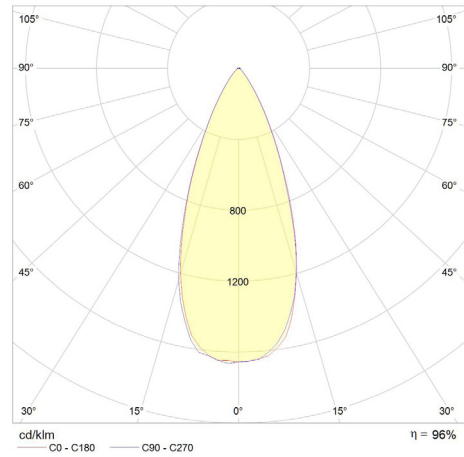


NICHIA NVSW219D

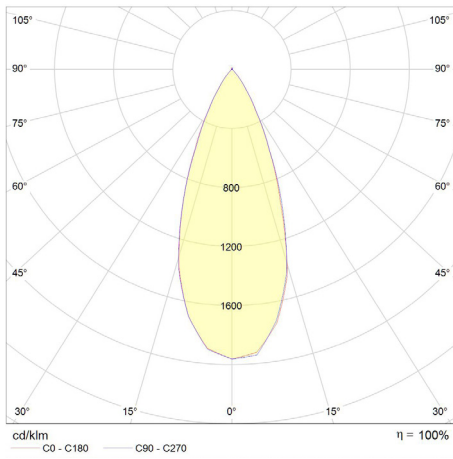


OSRAM OSLOM SQUARE

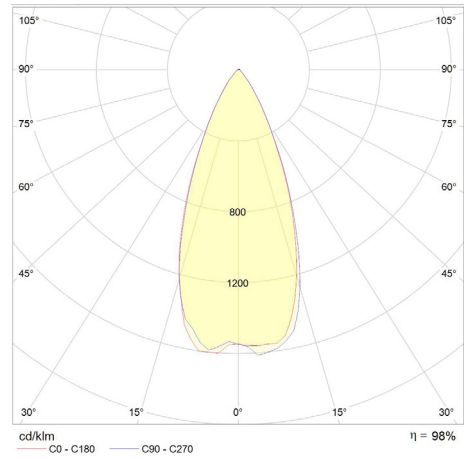



CREE XTE

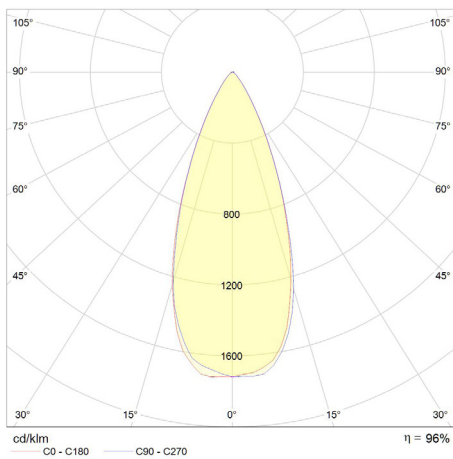

SEOUL Z5-M3

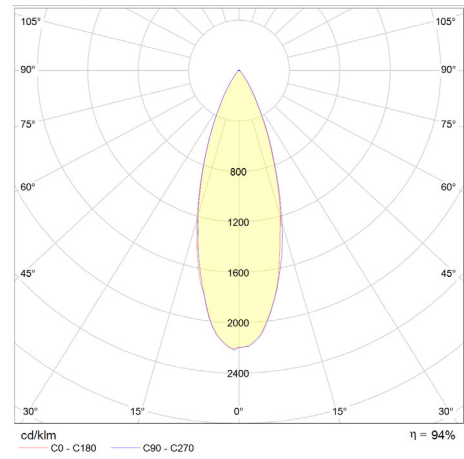

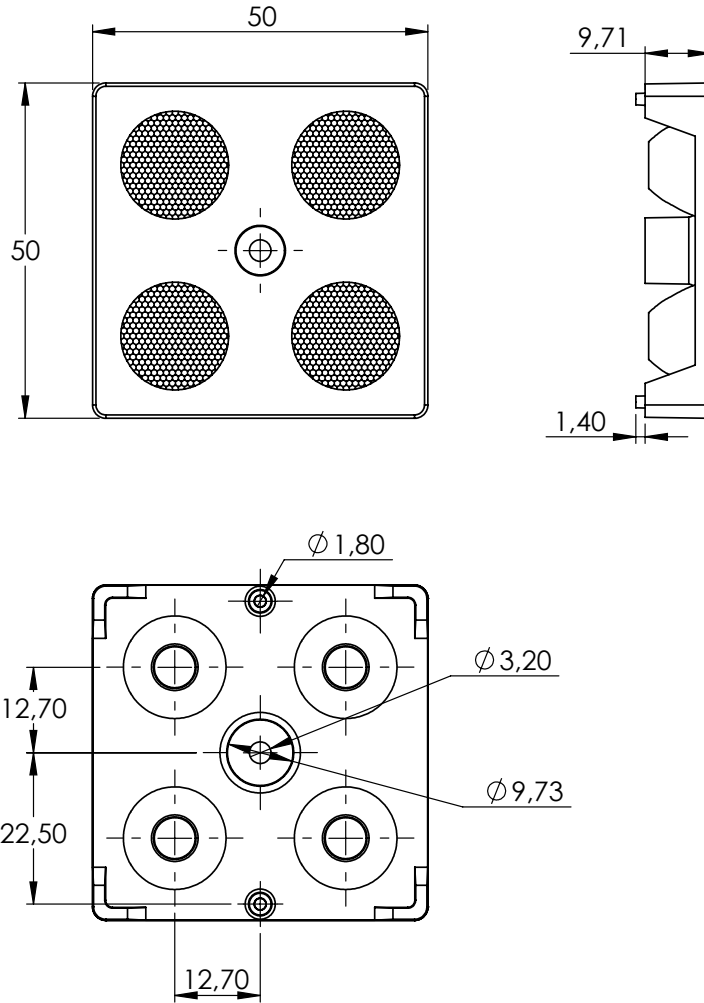

<b>EMAGE</b> <sup>®</sup>	UNIT mm	PART NO: PM040-HI22-SCH	 GENERAL TOLERANCES $\pm 0,2$ MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	10.94 g	1	
	DATE	22.06.2020	2	
			3	
		PAGE 1 / 1	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	6,4 Kg
Box Quantity	480 pcs

