


RoHS Compliance

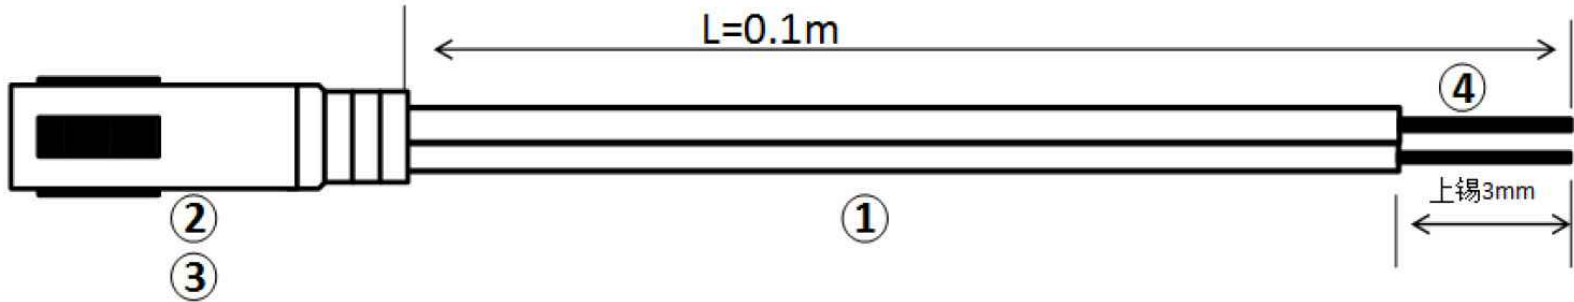

- Notes:
- 1.Wire specifications:2468-24AWG/22AWG 11/0.15BC×2F OD:1.8×3.6mm (Red and black)
 - 2.DC5.5×2.1mm×7.0mm Female
 - 3.PVC 45P Black
 - 4.Flaking the tail,3mmTin plating

Technical requirement
 100% electrical conduction test of finished products, no short circuit break, dislocation and poor contact

Appearance: the wire is uniform, and the sheath surface is free from damage, scratch, dirt, deformation and other sags

All departments meet ROHS requirements

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			DC5.5×2.1mm×7.0mm Female,L=100mm	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	CAB05-DC5521-L100
x.x ±0.30	SHEET SIZE	A4	Draw:	Daniel 2018-07-10
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	