

No.: RD20201117004

TO: Ozdisan

APPROVAL SHEET No. : S-1606A

Series No.: VH

Specification No.: add black

Halogen-Free Rohs2.0

APPROVAL SHEET

FOR CONDUCTIVE POLYMER ALUMINUM SOLID ELECTROLYTIC CAPACITORS

No.	(Customer No.)	(Koshin Part No.)	Description	Φ D x L
1		VH-050V390ME080-T/R	50V39μF	6.3X8

APPROVED BY:

PLEASE SIGN RETURN US ONE COPY OF THE APPROVAL SHEET

DESIGNED BY: JIANGYUN CHECKEDBY: JIANGYUANYUAN APPROVED BY: HUANGXUEHUI

TEL: 0755-89501998 FAX: 0755-89500378 POSTAL CODE: 518129


E-mail: koshin@koshin.com.hk

DATE: 2020-11-17

KOAS

DJS-DS-0013


1. Inner conformation drawing and inner constitute parts (curtness drawing):

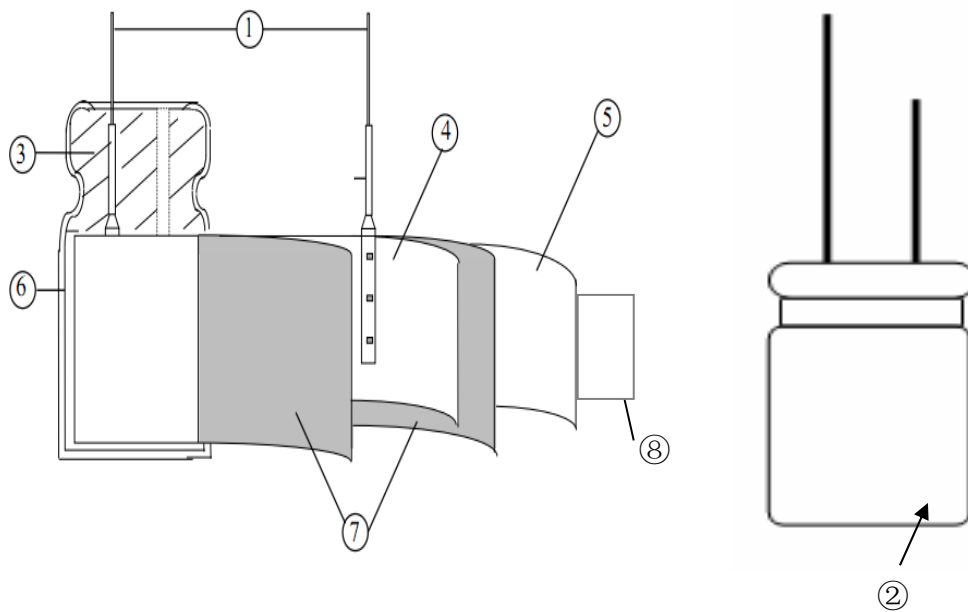

No.:	Composing Part	Material
①	Lead wire	Al+Cu+Fe+Sn
②	Chemical liquid	EDOT+PSS
③	Seal	Rubber
④	Anode foil	Aluminum foil
⑤	Cathode foil	Aluminum foil
⑥	Case	Aluminum
⑦	Paper	Cellulose
⑧	Tape	OPP



Standard Size map:

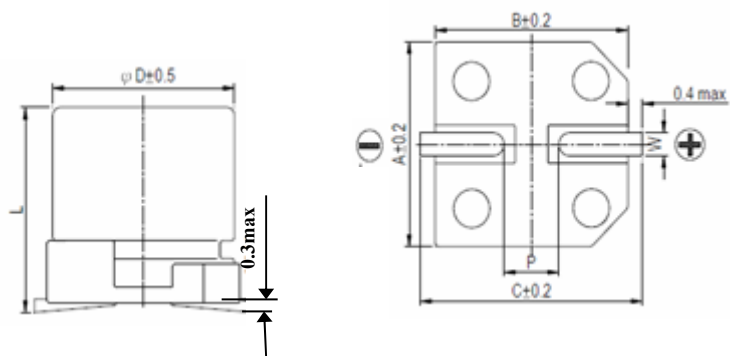

Lead spacing and Diameter

Unit: mm

ΦD	L	A	B	C	W	$P \pm 0.2$
6.3	8 ± 0.5	6.6	6.6	7.2	$0.5 \sim 0.8$	2.0

Frequency Coefficient for Ripple Current

Frequency(Hz)	$120 \leq F < 1K$	$1K \leq F < 10K$	$10K \leq F < 100K$	$100K \leq F < 500K$
Coefficient	0.05	0.3	0.7	1



Series VH Conductive Polymer Aluminum Solid Capacitors (HYBRID TYPE)

1. Our part No. :

For example:

<u>VH</u>	<u>050V</u>	<u>390</u>	<u>M</u>	<u>E080</u>
Se rise code	rated voltage	capacitance	tolerance	case size symbol
VH	50V	39 μ F	$\pm 20\%$	$\Phi 6.3 \times 8$

2. Your part No.:

3. Marking:

Include company's brand series code, rated voltage, capacitance, polarity.

4. Specifications:

4.1 Temperature range : -55~+125℃

4.2.1 Capacitance tolerance : $\pm 20\%$


4.2.2 Tangent of loss angle ($\tan \delta$) : 16% (20℃, 120HZ)

4.2.3 Leakage current (μ A) :

Rated voltage (V)	16-63
Leakage current (μ A)	Less than 0.01CV or 3whichever is large (after 2 minutes)

Note: I : Leakage current (μ A) , C : Capacitance (μ F) , V : Rated DC working voltage (V)

RECOMMEDED SOLDERING CONDITIONS FOR ALUMINIUM SURFACE MOUNT TYPE -Air or Infrared reflow soldering

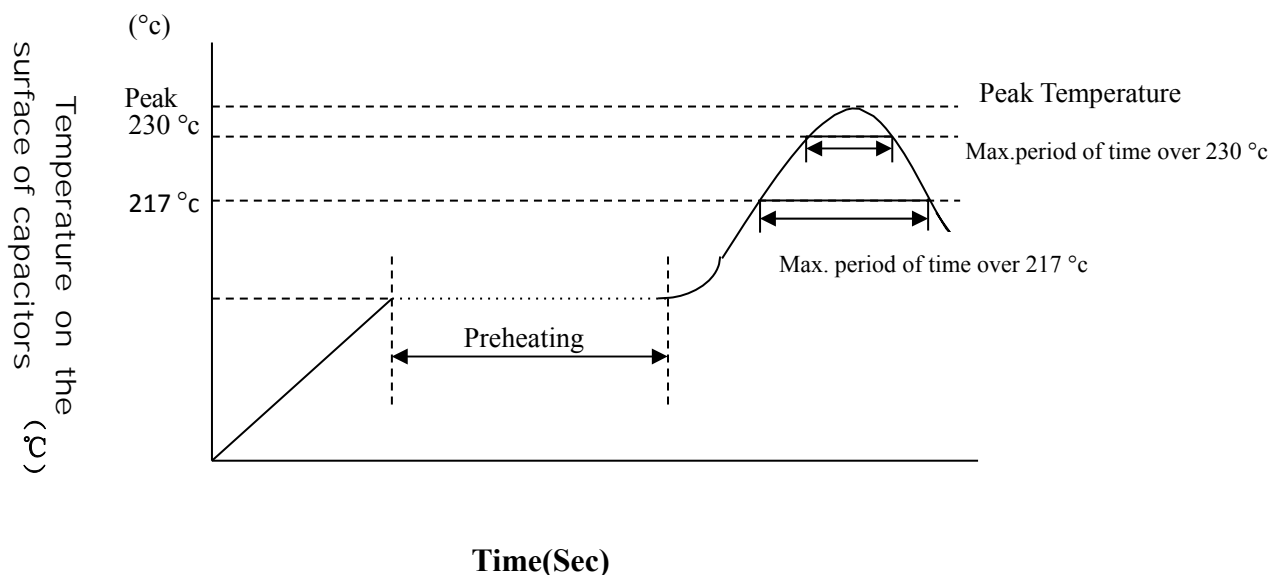



SMDshape	size	voltage	preheating	Time maintained over 217 °c	Time maintained over 230 °c	Peak temperature	Reflow number
	B52~E87	4~63V	150-180C ≤120Sec.	≤90 Sec	≤60 Sec	≤260 °c	≤2 times
		63V,80V		≤60 Sec	≤40 Sec	≤250 °c	≤2 times
	F63~G100	4~50V		≤60 Sec	≤30 Sec	≤245 °c	≤2 times
		63V~100, 400V		≤30 Sec	≤20 Sec	≤240 °c	≤2 times
	H135~K215	6.3~50V		≤30 Sec	≤20 Sec	≤240 °c	≤2 times
		63~450V		≤20 Sec	—	≤230 °c	≤2 times

Remark: Reflow number cannot over 2 times. After first time reflow , must be ensure that the temperature of capacitors became cold to room temperature(5~35℃) ,then continue second flow.

1. Scope:

This specification applies to conductive polymer aluminum solid capacitors used in electronic equipment.

2. Electrical characteristics:

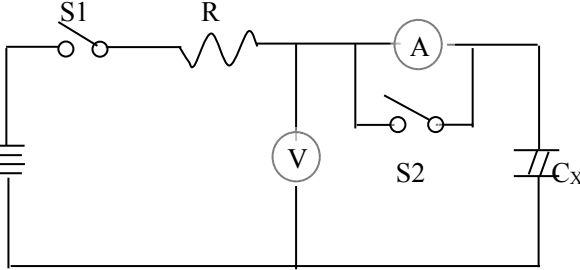NO	ITEM	TEST METHOD	SPECIFICATION																										
2.1	Rated voltage		Voltage range、 capacitance range ,see specification of this series																										
2.2	Capacitance	1.Measuring frequency:120Hz±12Hz 2.Measuring voltage:≤0.5Vrms+0.5VDC~2.0VDC																											
2.3	Dissipation factor	3.Measuring circuit: ()																											
2.4	Leakage current	<p>DC leakage current shall be measured after 1~2minutes application of the DC rated working voltage through the 1000 Ω resistor at 20℃</p>  <p>R: 1000 Ω 100 Ω A: DC current meter V: DC voltage meter S1:Switch S2:Switch for protect of current meter Cx: Testing capacitor</p>	Dissipation factor, leakage current, sees specification of this series.																										
2.5	Temperature characteristics	<table><tr><th>STEP</th><th>TEMPERATURE</th><th>ITEM</th><th>CHARACTERISTICS</th></tr><tr><td>1</td><td>20℃±2℃</td><td>Measure: Capacitance 、tan δ、 Impedance</td><td>-----</td></tr><tr><td>2</td><td>-55℃±3℃</td><td>Z-55℃/20℃</td><td>≤1.25</td></tr><tr><td>3</td><td>Keep at 15 to 35℃ for 15 minutes or more</td><td>-----</td><td>-----</td></tr><tr><td>4</td><td>125℃±3℃</td><td>Z125℃/20℃</td><td>≤1.25</td></tr><tr><td rowspan="2">5</td><td rowspan="2">20℃±2℃</td><td>ΔC/C 20℃</td><td>Within ±5% of step1</td></tr><tr><td>tanδ</td><td>Less than or equal to the value</td></tr></table> <p>a. Z-55℃ or 125℃/ Z 20℃: impedance ratio at 100kHz; b. ΔC/C 20℃ : Capacitance change at 120Hz; tan δ at 120H</p>		STEP	TEMPERATURE	ITEM	CHARACTERISTICS	1	20℃±2℃	Measure: Capacitance 、tan δ、 Impedance	-----	2	-55℃±3℃	Z-55℃/20℃	≤1.25	3	Keep at 15 to 35℃ for 15 minutes or more	-----	-----	4	125℃±3℃	Z125℃/20℃	≤1.25	5	20℃±2℃	ΔC/C 20℃	Within ±5% of step1	tanδ	Less than or equal to the value
STEP	TEMPERATURE	ITEM	CHARACTERISTICS																										
1	20℃±2℃	Measure: Capacitance 、tan δ、 Impedance	-----																										
2	-55℃±3℃	Z-55℃/20℃	≤1.25																										
3	Keep at 15 to 35℃ for 15 minutes or more	-----	-----																										
4	125℃±3℃	Z125℃/20℃	≤1.25																										
5	20℃±2℃	ΔC/C 20℃	Within ±5% of step1																										
		tanδ	Less than or equal to the value																										

NO.	ITEM	TEST METHOD	SPECIFICATION
2.6	Surge test	Rated surge voltage shall be applied (switch on)for 30±5 second and then shall be applied (switch off) with discharge for 5±0.5min at room temperature. This cycle shall be repeated for 1000 cycles. Duration of one cycle is 6±0.5 minutes, Test temperature:15°C-35°C.	Capacitance change: within±20% of the initial specified value. Tan δ : 150% or less of the specified value ESR: 150% or less of the specified value Leakage current: Within initial specified value.

3.Mechanical characteristics :

NO.	ITEM	TEST METHOD	SPECIFICATION
3.1	Vibration resistance	The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 0.75mm, completing the cycle in the internal of one minute. The capacitor shall be securely mounted by its leads with hold the body of capacitor. The capacitor shall be vibrated in three mutually perpendicular directions for a period of 2 hours in each direction.	Appearance: no abnormal. Capacitance change: within ± 5% of initial measured value.
3.2	Solder ability	The leads are dipped in the solder bath of Sn at 245°C±5°C for 2±0.5 seconds. The dipping depth should be set at 1.5~2.0 mm.	The solder alloy shall cover the 95% or more of dipped lead's area.


4. Reliability:

NO	ITEM	TEST METHOD	SPECIFICATION
4.1	Soldering heat resistance	The leads immerse in the solder bath of Sn at $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds until a distance of 1.5~2.0mm from the case.	<p>No visible damage or leakage of electrolyte.</p> <p>Capacitance change: Within $\pm 5\%$ of the initial measured value</p> <p>Tan δ : Less than or equal to 1.5 times of the value.</p> <p>ESR : Less than or equal to 1.5times of the value.</p> <p>Leakage current: Less than specified value</p>
4.2	Damp head (steady state)	Subject the capacitor to $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and 90% to 95% relative humidity for 1000 ± 48 hours.	<p>Capacitance change: Within $\pm 20\%$ of the initial measured value</p> <p>Tan δ : Less than or equal to 1.5 times of the value.</p> <p>Leakage current: Less than specified value</p> <p>ESR: Less than or equal to 1.5times of the value.</p>
4.3	Load life	After 4000 hours continuous application of max allowable ripple current and DC rated voltage at $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Measurements shall be performed after 16 hours exposed at room temperature.	<p>Capacitance change: Within $\pm 30\%$ of the initial value.</p> <p>Tan δ : 200% or less of the specified value</p> <p>ESR: 200% or less of the specified value</p> <p>Leakage current: Less than initial specified value.</p> <p>Appearance :no Abnormal</p>

4.4	Rapid change or temperature	<div> <p>125±2°C</p> <p>Room temperature</p> <p>-55±3°C</p> <p>30±3min. 3 min or less 30±3min. 3 min or less</p> <p>1 cycle (Fig.1)</p> <p>Applied voltage: without load.</p> <p>Cycle number:5 Cycles.</p> <p>Test diagram:Fig.1</p> </div>	<p>Capacitance change: Within $\pm 10\%$ of the specified capacitance.</p> <p>Tan δ : Less than initial specified value.</p> <p>Leakage current: Less than initial specified value.</p>
-----	-----------------------------	--	--

5. Marking **For example:**


1). Marking on capacitors includes:

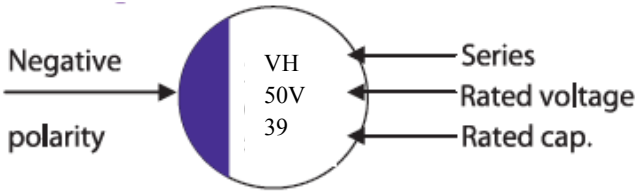

- 1>. Series
- 2>. Rated voltage
- 3>. Normal capacitance (μF)
- 4>. Polarity

5.2 Marking color: Blue

Carrier Pack Taping Specification:

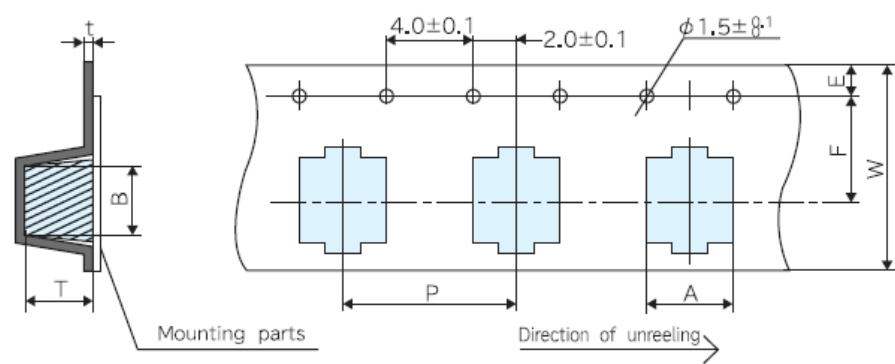


Product size table

Unit: mm


Dimension Size Code	A	B	W	F	E	P	t	T
$\phi 6.3 \times 8$	7.0 ± 0.2	7.0 ± 0.2	16	7.5	1.75 ± 0.1	12	0.6max	8.2 ± 0.2

Polarity:

Package for SMD Type:

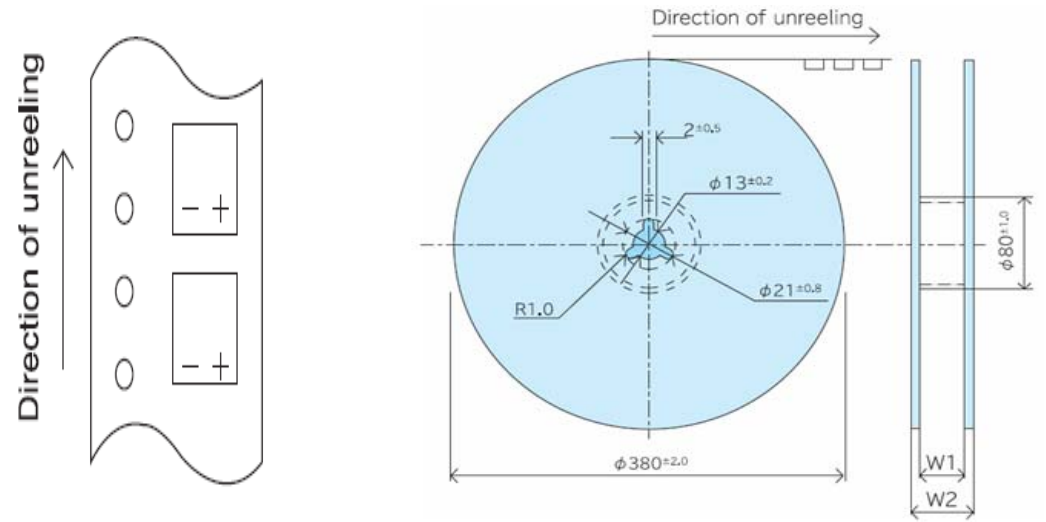

Size Code	W1(mm)	W2(mm)	Q'ty(pcs/reel)
$\phi 6.3$	18 ± 0.5	22.5 ± 1.0	1000

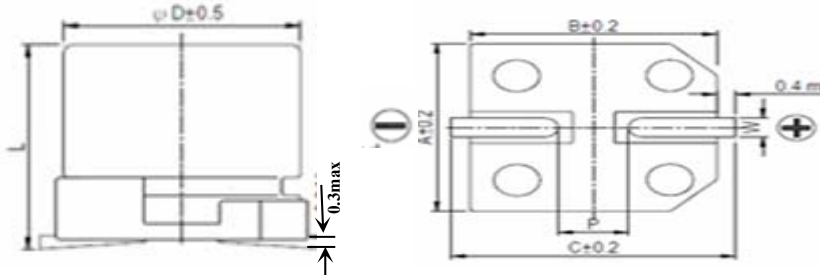Conductive Polymer Aluminum Solid Electrolytic Capacitors Specification(HYBRID TYPE)																										
Series	VH	50 V 39 μF		Part No.	VH-050V390ME080-T/R																					
Customer No.	/			Case size	ΦD6.3 X L 8																					
Specification	Items			Standard																						
	Operating temperature range			- 55 ~ + 125 ℃																						
	Capacitance tolerance			±20% (20℃ ,120Hz)																						
	Dissipation factor (MAX)			(Less than) 16% (20℃ ,120Hz)																						
	Leakage current (MAX)			(Less than) 19.5μA (20℃ 50 V 2 min)																						
	E S R (MAX)			36 mΩ (100KHz ,20℃)																						
	Ripple current (MAX)			1300 mArms (100kHz ,125℃)																						
	Load life			4000 hrs																						
Outline	Marking color			Blue																						
	(Dimensions)																									
																										
	<table><tr><th colspan="6">Lead spacing and Diameter</th><th>(unit):mm</th></tr><tr><th>D</th><th>L</th><th>A</th><th>B</th><th>C</th><th>W</th><th>P±0.2</th></tr><tr><td>6.3</td><td>8±0.5</td><td>6.6</td><td>6.6</td><td>7.2</td><td>0.5-0.8</td><td>2.0</td></tr></table>						Lead spacing and Diameter						(unit):mm	D	L	A	B	C	W	P±0.2	6.3	8±0.5	6.6	6.6	7.2	0.5-0.8
Lead spacing and Diameter						(unit):mm																				
D	L	A	B	C	W	P±0.2																				
6.3	8±0.5	6.6	6.6	7.2	0.5-0.8	2.0																				
Recorder:	(The first edition) :2020-11-17																									
Wrote by: JiangYun		Checked by: Jiangyuanyuan			Approved by: Huangxuehui																					