


Part Number	Current Rating	Housing Color
L-KLS5-193N-020-A	20A	Yellow
L-KLS5-193N-025-A	25A	Grey
L-KLS5-193N-030-A	30A	Green
L-KLS5-193N-035-A	35A	Brown
L-KLS5-193N-040-A	40A	Dark Orange
L-KLS5-193N-050-A	50A	Red
L-KLS5-193N-060-A	60A	Blue
L-KLS5-193N-070-A	70A	Tan
L-KLS5-193N-080-A	80A	Natural
L-KLS5-193N-100-A	100A	Violet

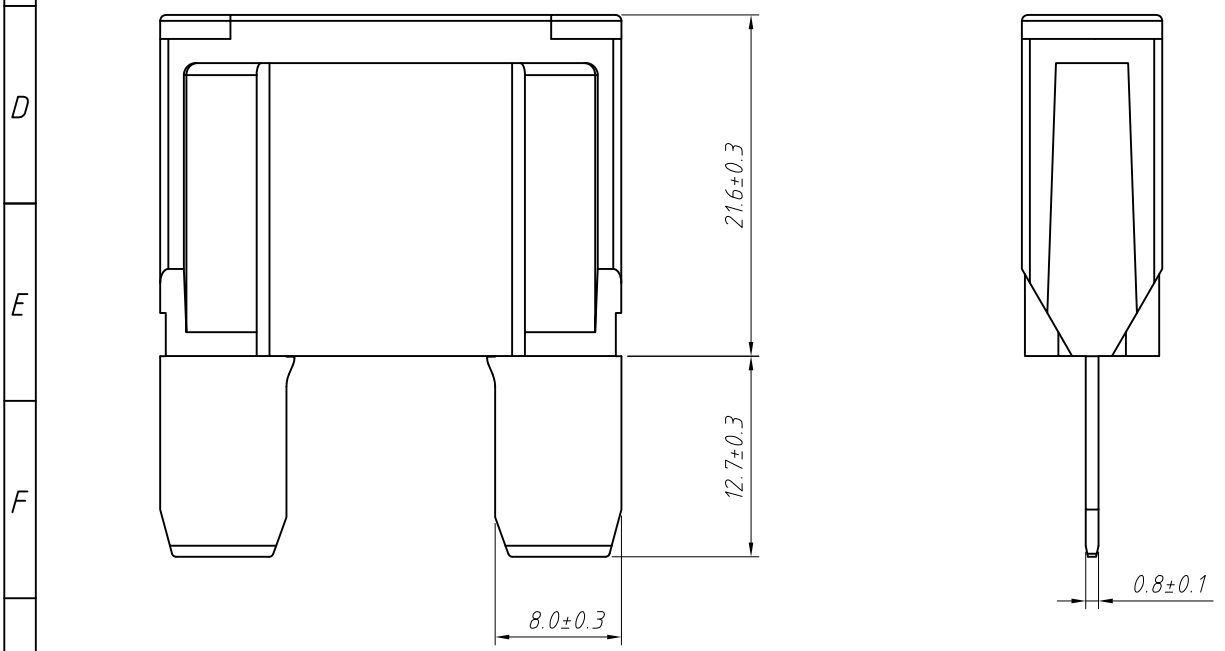

Characteristics:
 Voltage Rating: 32V DC
 Current Rating: 20A ~ 100A
 Operating Temperature: -40°C to +125°C

Material:
 Body: PC, UL94-V2
 Contact: Zinc Alloy

Time-Current Characteristics

% of Rating	Opening Time
110	>360,000s
135	0.75 to 1800s
200	0.15 to 5s
350	0.04 to 0.5s
600	0.02 to 0.1s

GENERAL TOLERANCE	PROJECTION		Description:
X. ±1.00	UNITS	mm	32V MAXI Blade Fuse
.X ±0.50	SCALE	1:1	
.XX ±0.30	Draw by:	Daniel	KLS P/N: L-KLS5-193N-XX-A
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2022-09-01	
.X ±3°	SHEET	1 OF 1	