# P.B.C SOCKET 2.54mm(0.100)

P.C.B SOCKET 2.54mm (0.100")



2.54mm单排母座H8.4

## 材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black
接触件 Contacts: Brass
电镀层 Plating:Whole Gold plated over Nickel

## 电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩ max. at DC 100mA
绝缘电阻 Insulator Resistance: 1000MΩ min. at 500V DC
耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40℃~+105℃
焊接温度 Soldering Temperature:260℃,6s max

## 订购方法 How To Order

DK511-1x40
Series Position

S
S: Straight
R: Right Angle

G
G: Gold Plated
T: Tin Plated

常规表达：型号(排母)-规格(1X**)-类型(S或R)

针脚长度 (L)可以选择 6.0mm / 11.0mm　Dip Length: 6.0mm / 11.0mm

*其它要求的产品另外说明 Other requests 's product on the other hand description

**Straight Type**

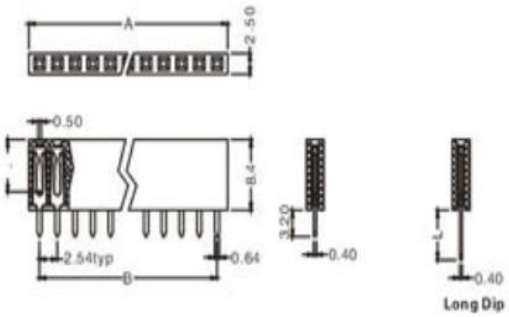


**Right Angle Type**

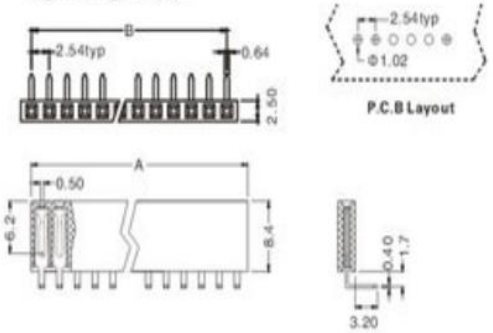


| Position / Dimension | 1 Thru 40 |
|---|---|
| A±0.20 | 2.54 X No.of Positions+0.5 |
| B±0.15 | 2.54 X No.of Positions -2.54 |