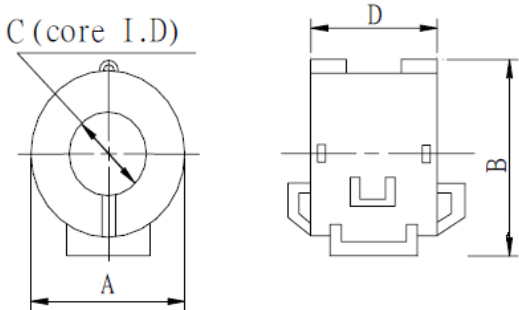


SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:					
PART NO: LF – 801B (B8)				DWG.NO: CT2103321K5A					
CUSTOMER PART NO:				CUST.DWG.NO:					
(1) DIMENSION(UNIT:mm) 				A	19.5 ± 1.0	m/m			
				B	23.0 ± 1.0	m/m			
				C	8.1 ± 0.3	m/m			
				D	17.0 ± 1.0	m/m			
				E		m/m			
				F		m/m			
				G		m/m			
				H		m/m			
				I		m/m			
				J		m/m			
				(2) ELECTRICAL REQUIREMENTS				(3) CASE COLOR B:BLACK W:WHITE G:GRAY	
Z	MIN 50 OHM	TEST FREQ	25 MHz						
Z	MIN 100 OHM	TEST FREQ	100 MHz						
Z	MIN OHM	TEST FREQ	MHz						
Z	MIN OHM	TEST FREQ	MHz						
TEST INSTRUMENTS HP4286A									
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏					
CORE	UH-16.3×13×8.1					CHECKED BY 張明德			
WIRE	φ 0.6×100 mm			DRAWN BY LISA					
WINDING	1 Ts								

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: LF - 801B (B8)				DWG.NO: CT2103321K5A					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C	D		
SPEC	MIN 50 OHM	MIN 100 OHM		19.5 ± 1.0	23.0 ± 1.0	8.1 ± 0.3	17.0 ± 1.0		
1	61	123		19.15	22.50	8.13	17.03		
2	60	123		19.18	22.66	8.17	17.03		
3	61	121		19.20	22.60	8.09	17.05		
4	60	122		19.20	22.49	8.12	17.01		
5	61	121		19.14	22.53	8.12	17.01		
6	62	122		19.14	22.58	8.15	16.99		
7	60	123		19.16	22.53	8.12	17.01		
8	60	121		19.15	22.52	8.15	16.98		
9	60	120		19.18	22.49	8.16	17.02		
10	60	123		19.13	22.55	8.16	17.05		
X	61	122		19.16	22.55	8.14	17.02		
R	2	3		0.07	0.17	0.08	0.07		
外觀檢查: 產品不能有明顯缺陷、污損；產品缺口長寬在 1.7mm 以下,深 在 1.0mm 以下。						APPROVED BY			
						吳載敏			
						CHECKED BY			
				張明德					
				DRAWN BY					
				LISA					

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

LF - 801B (B8)

