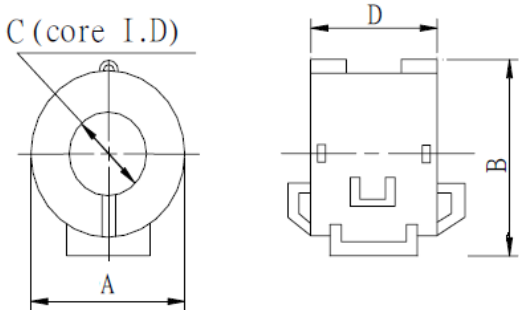


SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:	
PART NO: LF – 802B (B8)				DWG.NO: CT2108614K5A	
CUSTOMER PART NO:				CUST.DWG.NO:	
(1) DIMENSION(UNIT:mm) 				A	19.5 ± 1.0 m/m
				B	23.0 ± 1.0 m/m
				C	8.1 ± 0.3 m/m
				D	20.0 ± 1.0 m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
				(2) ELECTRICAL REQUIREMENTS	
Z	MIN 50 OHM	TEST FREQ	25 MHz	B:BLACK W:WHITE G:GRAY	
Z	MIN 100 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
TEST INSTRUMENTS					
HP4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY	
CORE	UH-16.3×16×8			吳載敏	
WIRE	φ 0.65×100 mm			CHECKED BY	
WINDING	1 Ts			張明德	
				DRAWN BY	
				Vivian	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: LF - 802B (B8)				DWG.NO: CT2108614K5A					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C	D		
SPEC	MIN 50 OHM	MIN 100 OHM		19.5 ± 1.0	23.0 ± 1.0	8.1 ± 0.3	20.0 ± 1.0		
1	71	136		19.23	22.82	8.18	19.83		
2	72	135		19.29	22.87	8.14	19.79		
3	72	136		19.22	22.75	8.19	19.85		
4	70	137		19.22	22.85	8.21	19.89		
5	71	135		19.23	22.83	8.21	19.83		
6	71	135		19.20	22.89	8.16	19.85		
7	72	137		19.25	22.78	8.15	19.89		
8	71	136		19.26	22.86	8.16	19.85		
9	71	135		19.21	22.80	8.16	19.82		
10	72	136		19.25	22.84	8.14	19.81		
X	71	136		19.24	22.83	8.17	19.84		
R	2	2		0.09	0.14	0.07	0.10		
外觀檢查: 產品不能有明顯缺陷、污損；產品缺口長寬在 1.7mm 以下,深在 1.0mm 以下。							APPROVED BY		
							吳載敏		
							CHECKED BY		
			張明德						
			DRAWN BY						
			Vivian						

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

LF - 802B (B8)

