



### Features

- Advanced DEC DQ 1U technology and production line was introduced into from Japan .
- Small size(18.2\*10.2\*15.5mm)with 12A switching capability for high density PCB mounting.
- Surge voltage : 10000V (between coil and contact).
- Patent number: ZL 200820188817.6 , ZL 200820188818.0
- Satisfice IEC60335-1product is available.
- Satisfice IEC60079-15 product is available.

### Safety Approval

UL , C-UL File No. : E190598

TUV File No. : R50142420

CQC File No. : CQC02001002114

### Contact Capacity

Model	SJ-DM	SJ-LM
Nominal switching capacity (res. load)	10A 250VAC	8A 277VAC
Max. switching current	12A	12A
Max. switching voltage	277VAC	277VAC
Max. switching power	3,324VA	3,324 VA

### Characteristic Data

Contact material	Silver alloy	
Initial contact resistance (at 6VDC 1A)	50mΩ Max.	
Operate time (at nominal volt . )	10msec. Max.	
Release time (at nominal volt . )	5msec. Max .	
Initial insulation resistance	1,000MΩ Min.(DC500V)	
Initial dielectric strength	Between open contacts : AC1,000V , 50/60Hz 1min.	
	Between coil and contact : AC4,000V , 50/60Hz 1min.	
Vibration resistance	Functional	10 ~ 55Hz at double amplitude of 1.5 mm
	Destructive	10 ~ 55Hz at double amplitude of 1.5 mm
Shock resistance	Functional	10G Min.
	Destructive	100G Min.
Endurance (operations)	Mechanical (at 10,800 ops./h)	10,000,000
	Electrical (at 1,800 ops./h)	100,000
Ambient temperature	-40°C ~ +105°C (no condensation)	
Unit weight	Approx. 5.7 g	

### Coil Data (at 20°C)

Nominal voltage (VDC)	Nominal operating current 10% ( mA)	Coil resistance 10% ( Ω)	.Max allowable voltage	Pick-up voltage (Max.)	Drop-out voltage (Min.)	Nominal operating power
3	150.00	20	130 % of nominal voltage	75 % of nominal voltage	5 % of nominal voltage	.Approx 0.45W
5	90.00	55				
6	75.00	80				
9	50.00	180				
12	37.50	320				
18	25.00	720				
24	18.75	1,280				

Coil Data (at 20°C)

Nominal voltage (VDC)	Nominal operating current 10% (mA)	Coil resistance 10% (Ω)	.Max allowable voltage	Pick-up voltage (Max.)	Drop-out voltage (Min.)	Nominal operating power
3	66.67	45	130 % of nominal voltage	75 % of nominal voltage	5 % of nominal voltage	.Approx 0.2W
5	40.00	125				
6	33.33	180				
9	22.22	405				
12	16.67	720				
18	14.81	1,620				
24	8.33	2,880				

Safety Approval Ratings

(Note:More detail of approval ratings,please refer to the safety certification)

Approval	CQC	TUV	UL/CUL
File No.	CQC02001002114	R50142420	E190598
Approved ratings	SJ-D 10A 250VAC 12A 125/250/277VAC SJ-L 8A 277VAC 12A 125/250/277VAC	SJ-D 10A 250VAC	SJ D 10A 125VAC/250VAC,Resistive 10A 120VAC,Resistive 1/3 HP 240VAC TV-5,120VAC Poliot Duty:240VA,240VAC 12A/10A 125/250/277VAC,Resistive & General use  SJ D 8A 277VAC Resistive TV-3,120AVC 1/4HP 240VAC Poliot Duty:120VA,240VAC 12A/10A 125/250/277VAC,Resistive & General use


Ordering Information

Nomenclature										
SJ	-S	-1	12	D	M	H	1	-F	-XX	Special Parameter : Nil-Standard type , Letter or number-Special requirement
Insulation System : Nil-Standard, B-Class B, F-Class F										
Contact Material : Nil-AgSnO2, 1-AgCdO , 2-AgNi										
Load Capacity : H-12A,10A,8A(see note)										
Contact Form : M-Form A										
Coil Power : D-0.45W L-0.2W										
Coil Voltage (VDC) : 03, 05, 06, 09, 12, 18, 24										
Number of Poles : 1-1 Pole										
Protective Construction : S-Flux proofed SH-Sealed type washable										
Type Designation : SJ										

Note: when coil power is 0.45W, H stands for 10A;when coil power is 0.2W,H stands for 8A;12 a maximum load certification.


Typical Applications

Outline Dimensions, Wiring Diagram, P. C. Board Layout (unit : mm )

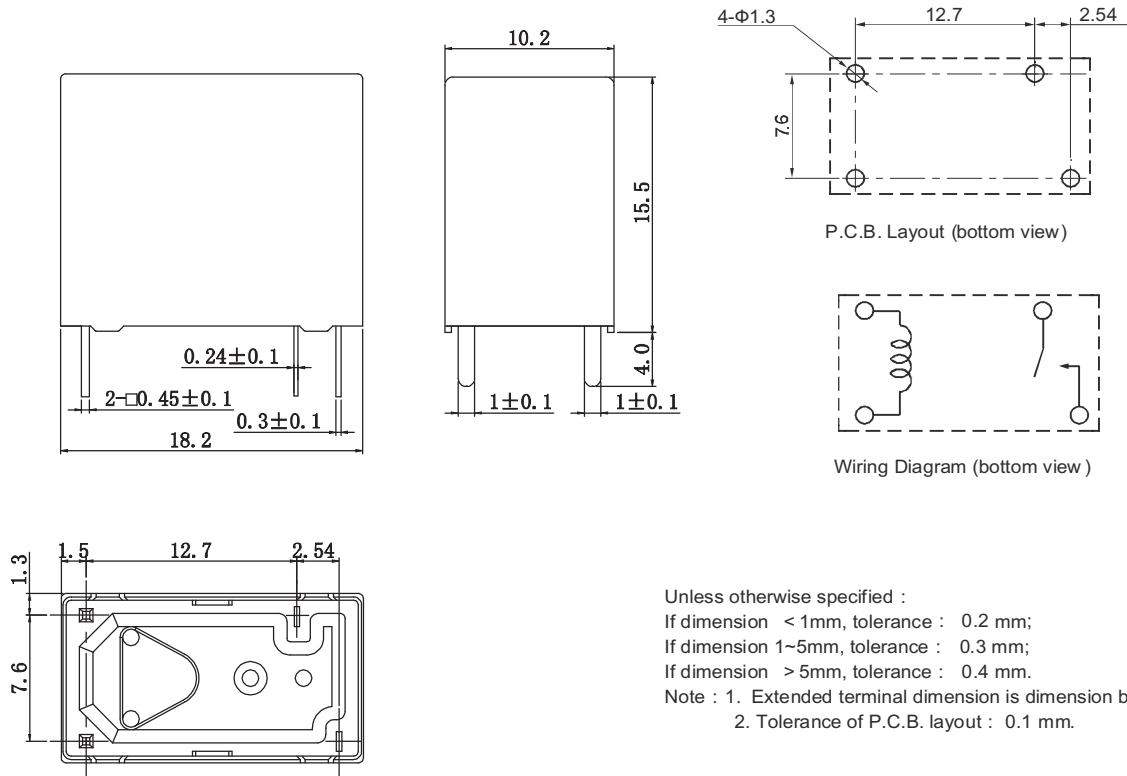

- Home appliances, office equipment, audio equipment, car, air conditioner, etc.

Characteristic Curves

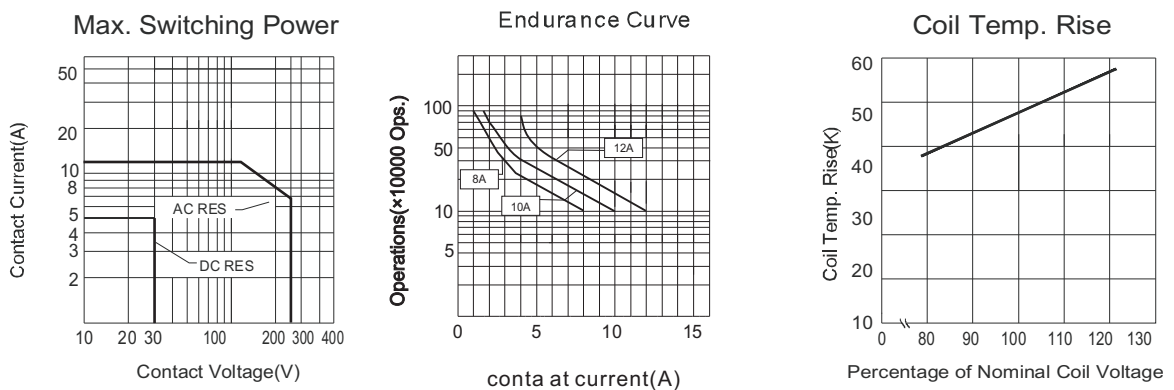

Disclaimer:

This datasheet is the customers' reference. All the specification are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. If there is any query, please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used only.