




REV.	CHANGE CONTENT	BY	DATE
A	FIRST ISSUE	JYQ	21.5.17

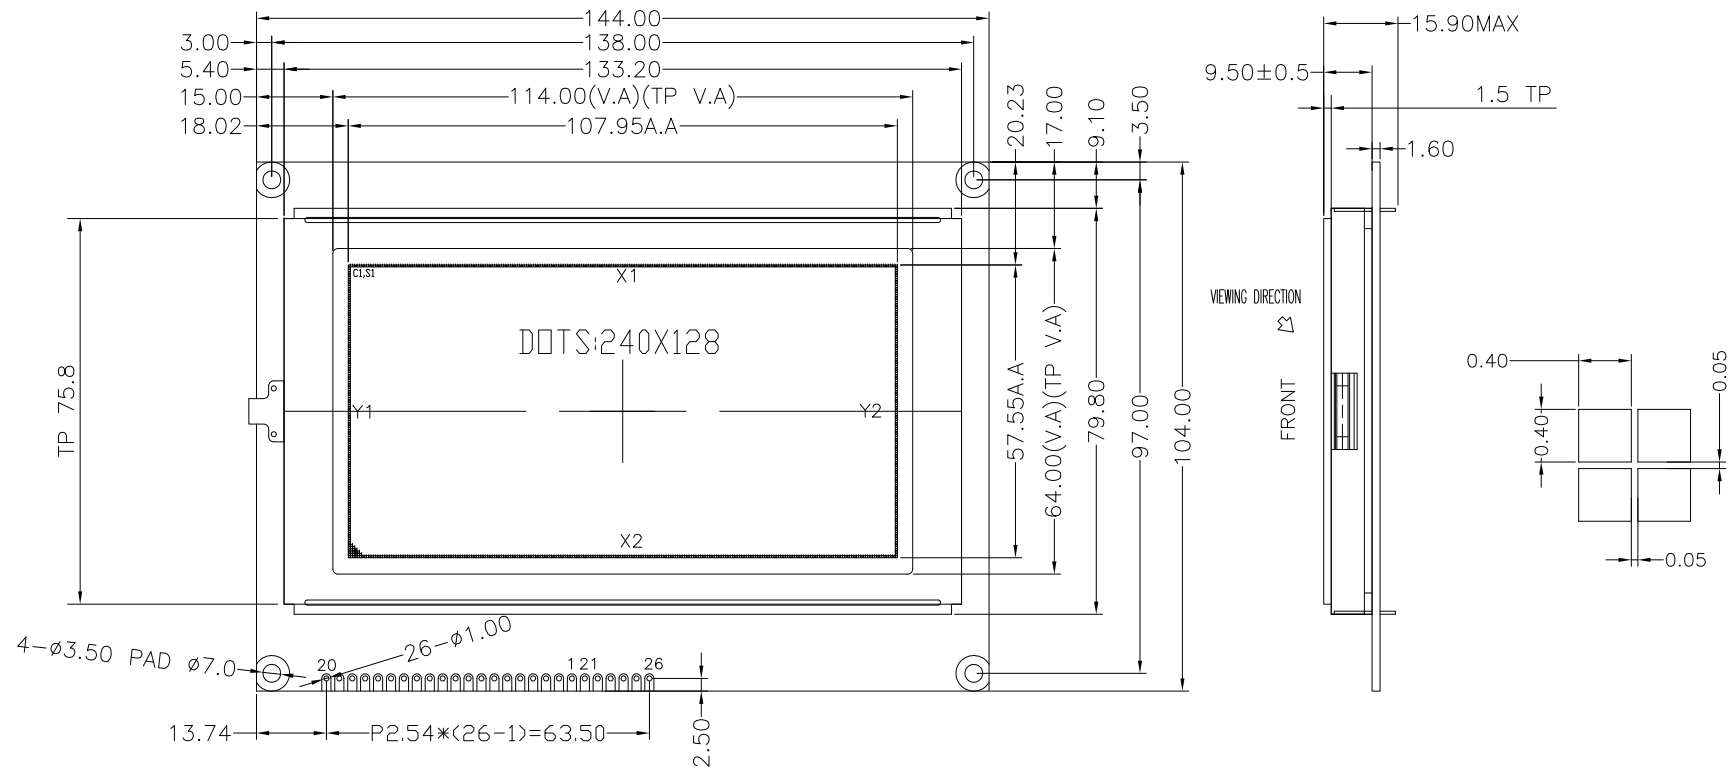

1	2	3	4	5	6	7	8	9	10	11
VSS	VDD	V0	C/D	/RD	/WR	DB0	DB1	DB2	DB3	DB4
12	13	14	15	16	17	18	19	20		
DB5	DB6	DB7	/CE	/RST	VOUT	MD2	FS	NC		

21	22	23	24	25	26
X1	Y1	X2	Y2	A	K

- NOTES 1:
- 1). DISPLAY TYPE : STN/BLUE
 - 2). DISPLAY MODE : TRANSMISSIVE/NEGATIVE
 - 3). VIEWING DIRECION : 12 O'CLOCK
 - 4). POWER SUPPLY FOR LOGIC : 5.0V
 - 5). OPERATING TEMP : -20°C TO 70°C
STORAGE TEMP : -30°C TO 80°C
 - 6). LCD CONTROLLER :RA6963C OR EQV
 - 7). DRIVER METHOD: 1/128 DUTY,1/12 BAIS,Vop=17.2V
 - 8). LED: COLOR: White VBL=5V If<200mA
 - 9). UNMARK TOLERANCE IS :±0.3mm
 - 10). RoHS
 - 11). □ Important dimension

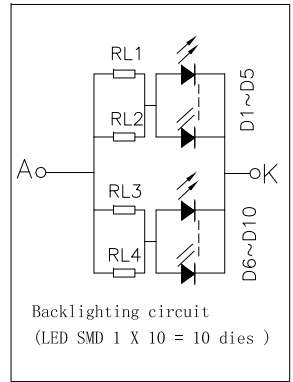

北京海讯华田电子有限公司			DRAWING No. : HG24012832C-VK	
			DRAWING TITLE : LCM	
			FILE NO. :	
DESIGN	JYQ	21.5.17	REV. : A	SCALE : 1 : 1
CHECKED	HK	21.5.17	PROJECTION:	UNIT : mm
APPROVED	WYR	21.5.17	⊕	SHEET : 1/1