




RoHS

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Poles: 24P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4202 dual row receptacle
- Use With: T4202 Terminals
- The Dimension Marked “▼” Must Be Recorded

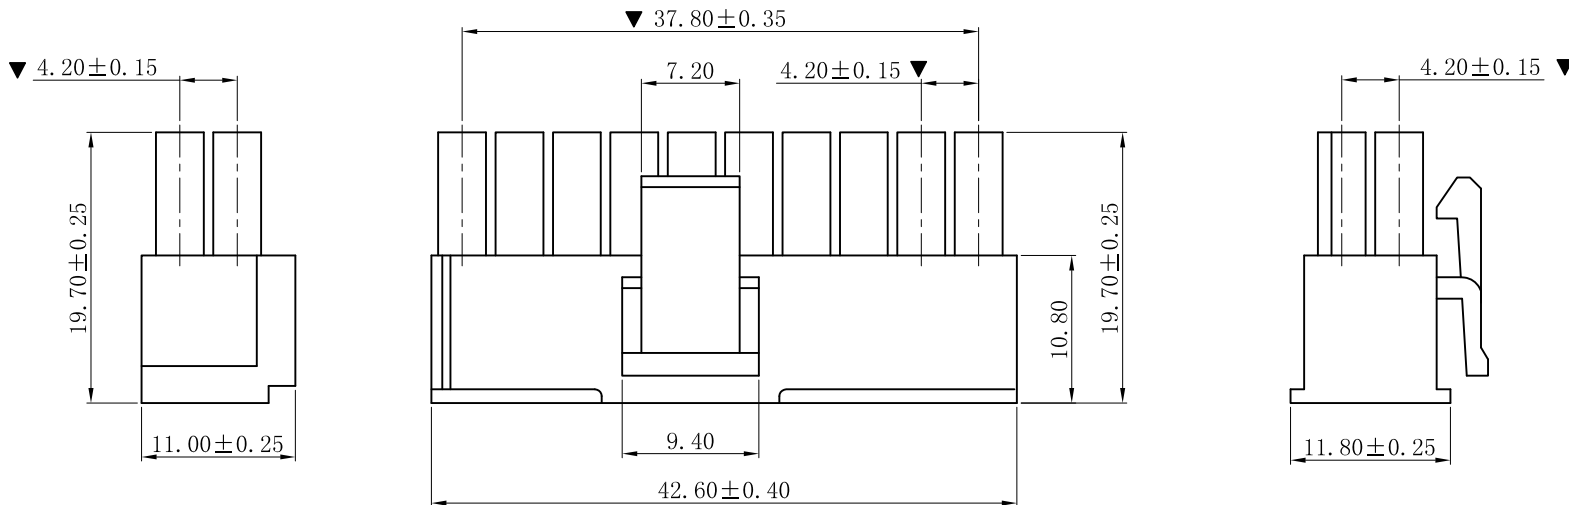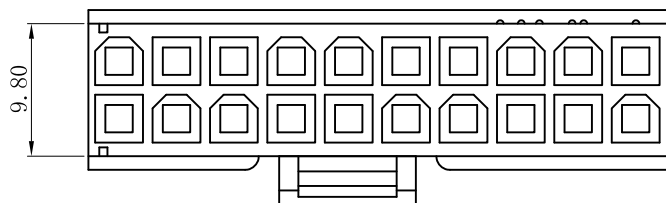

				一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	NINGBO KLS ELECTRONIC CO.,LTD				
D	更新图面	2019-07-03	陈雄军	绘图/DR	PA. Duan					投影法 Projection
C	修订版本	2015-11-04	陈雄军	审核/CHECK	陈雄军	单位/Unit	MM	料号 (PART NO)	L-KLS1-4.20-204H00	状态码 C
B	变更图宽格式内容	2013-12-27	陈雄军	核准/APPRO	胡进	比例/Scale	1:1			
A	新版本	2011-05-24	陈雄军	日期/DATE	2019-07-03	大小/SIZE	A4			
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.			页码/SHEET	1/1			
						版本/Rev	D			