
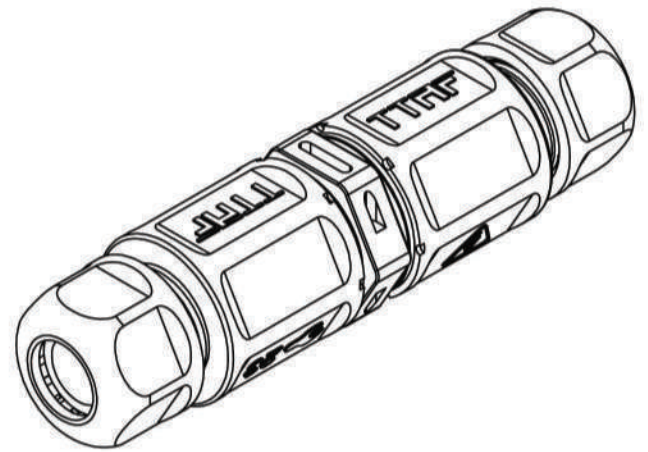
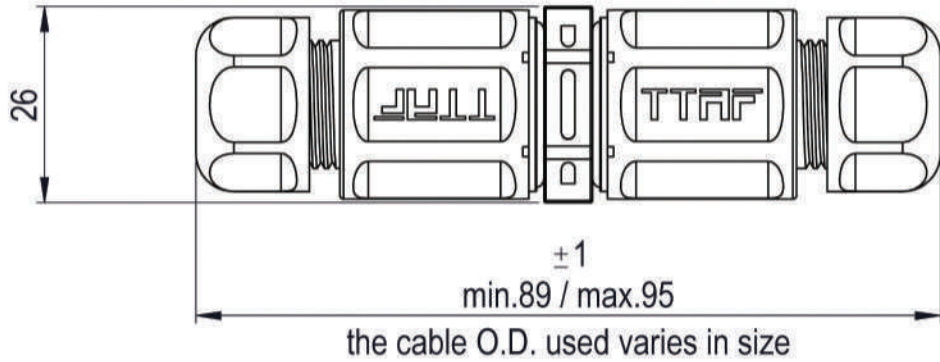


TOL. UNLESS SPECIAL SEE STANDARD TOLERANCE		Scale To Fit				
NOMINAL DIMENSION	0-30	30-100	100-200	200-400	400-1000	
0	±0.1	±0.2	±0.3	±0.5	±1	
0.0	±0.05	±0.05	±0.1	±0.2	±0.3	
0.00	±0.01	±0.02	±0.05	±0.05	±0.1	



PIN NUMBER

02
03
04

VOLTAGE

WP I - 03 02 M 20

SERIES NAME

INPUT-OUTPUT
NUMBER

CURRENT
VALUE

PRODUCT NAME
I:FLAT CONNECTOR
T:T CONNEKTOR
F:FEMALE M:MALE

00
02
03

20
25
35

Technical Specifications

Number of Poles	3
Voltage Rating	250VAC max.
Current Rating	20A max.
Cable Cross Section Area	0,5 ~2,5mm ²
Durability Voltage	1500VAC@60s.
Insulation Structure	500 MΩ at 500VDC
Contact Resistance	10 mΩ max.
Min Wire Size OD	6mm
Max Wire Size OD	10mm
Operating Temperature	-40°C ~ +85°C
IP Rating	IP68(10m / 60min.)
Mold Material	PA6
Contact/Terminal Material	Nickel-Plated Brass
Seal Material	Silicone

Date	02.07.2018	Signature	Rev.	Revision Detail		Rev.Date	By	Drawing Description		
Drawn	Zafer BOLUKBASI		-			-	-	WPI-0302M20		
Checked	Dilek TUNCER									
Approved	Talat SAHIM									
								Drawing No	Scale	Sheet
								-	1:1	1/1