

## SPECIFICATION

Operation Temperature:-30°C to +85°C


Operation Force:1000gf Max.

Storage Temperature:-40°C to +85°C


Mechanical Life:3000cycles minimum

## ORDER INFORMATION


6 4 S W T - A X 4 B 1 2 7







[Schematic]

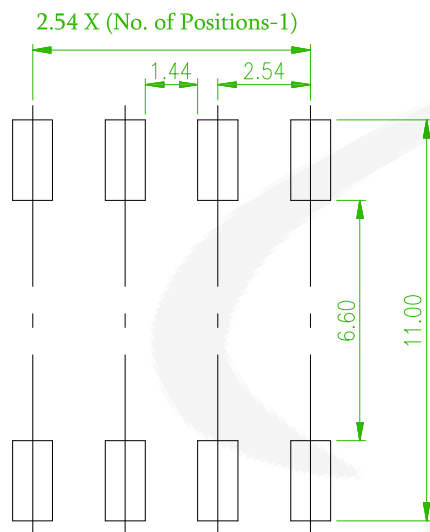

P.C.B. LAYOUT

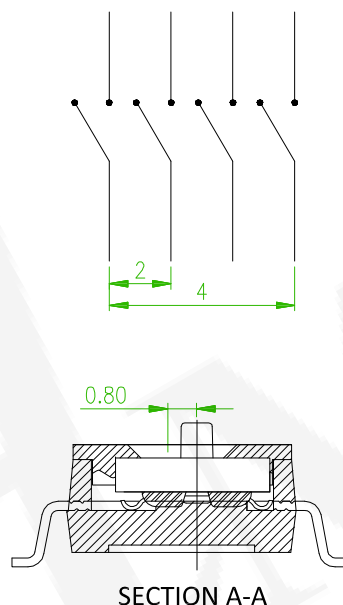


(Construction)

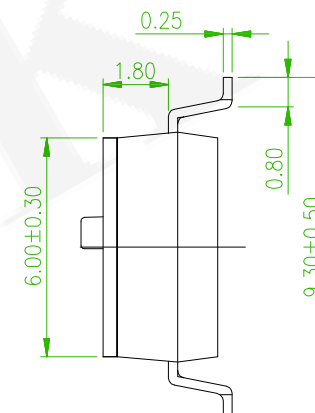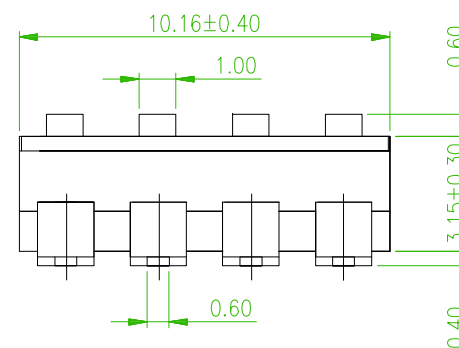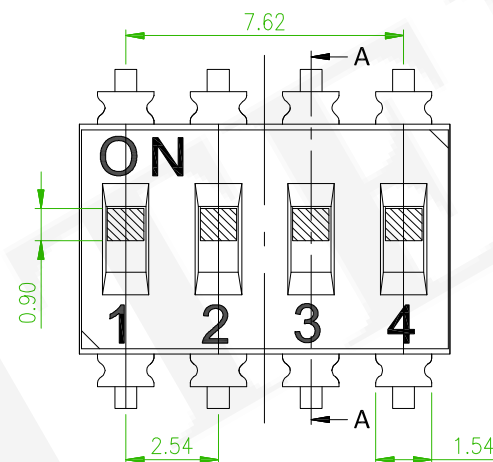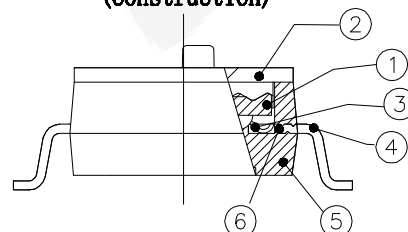

Number	Part Name	Material	Finished
①	Actuator	PA46 UL94 V-0	White
②	Cover	PPS UL94 V-0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	PPS UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

△ B x1	ECN NO.: 180814, revise the annotation: Slide -> Dip.	Gary	2018/10/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	DIP SWITCH				頁數 Page	1/1
	品號 PART NO.	64SWT-AX4B127				繪圖 DRAWN	Mia 2016/09/06
	圖號 DRAWING NO.	GN114-GB489		版本 REV.	B	核對 CHECKED	Josh 2018/10/22
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/10/22
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	