


1  
RoHS Compliance

7		8	
REV	SYM	Revision Record	Appr.
V0	KLS08052	New Version Release	Jenny
		Date	2023-07-18

Mounting Hole  $\phi 3.2$ , Thickness 1.6mm

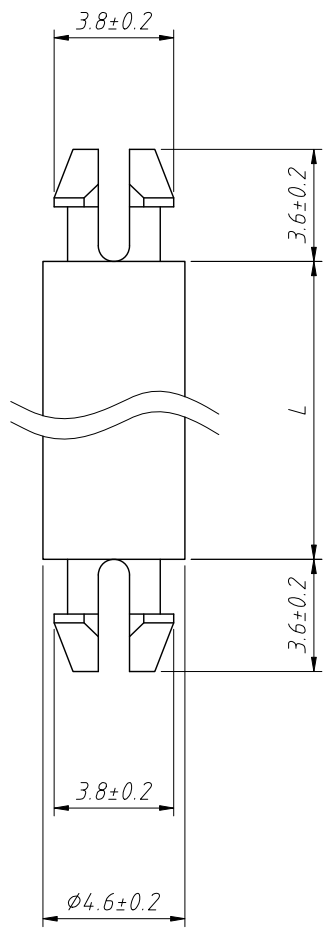

Part No.	L
L-KLS8-0202B-SP-01	1.2
L-KLS8-0202B-SP-03	3.2
L-KLS8-0202B-SP-04	4.0
L-KLS8-0202B-SP-4.8	4.8
L-KLS8-0202B-SP-06	6.4
L-KLS8-0202B-SP-09	8.7
L-KLS8-0202B-SP-9.5	9.5
L-KLS8-0202B-SP-11	11.1
L-KLS8-0202B-SP-13	12.7
L-KLS8-0202B-SP-14	14.3
L-KLS8-0202B-SP-16	15.9
L-KLS8-0202B-SP-19	19.1
L-KLS8-0202B-SP-20.6	20.6
L-KLS8-0202B-SP-22	22.2
L-KLS8-0202B-SP-25.4	25.4
L-KLS8-0202B-SP-32	31.8
L-KLS8-0202B-SP-35	34.9

Material:  
Nylon66,UL 94V-2,Natural

- Note:  
1. Shrinking Is Normal Status  
2. Made Of Equivalent Material

Mounting Hole  $\phi 3.2$ , Thickness 1.6mm

ANGLE TOLERANCE	PROJECTION	Description:	PCB spacer supports		
$\pm 3^\circ$					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0202B-SP-4.8	
x.x $\pm 0.30$	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx $\pm 0.20$	Draw:	Jenny			2023-07-18
x.xxx $\pm 0.10$	Check:	Daniel			2023-07-18