
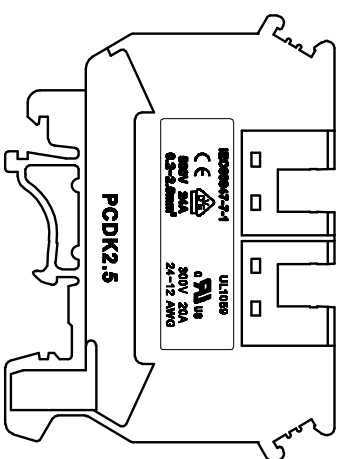
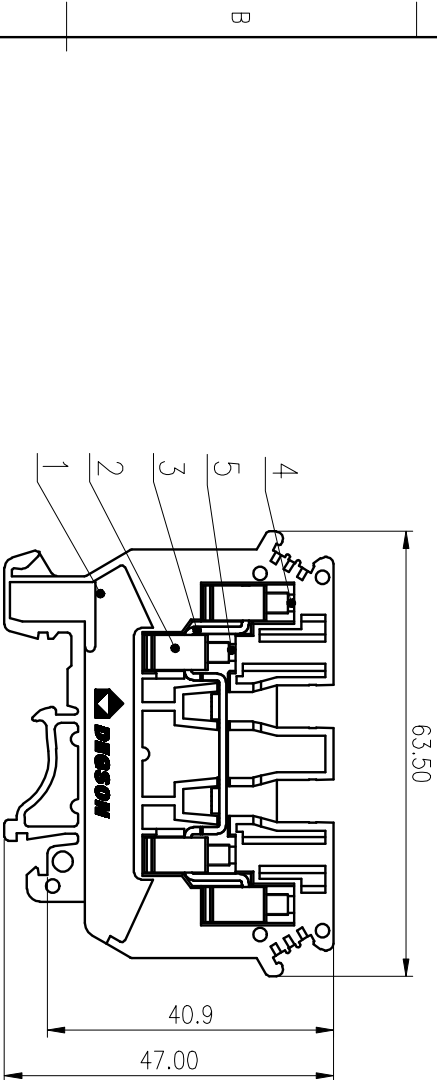


精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z	±Z	±Z

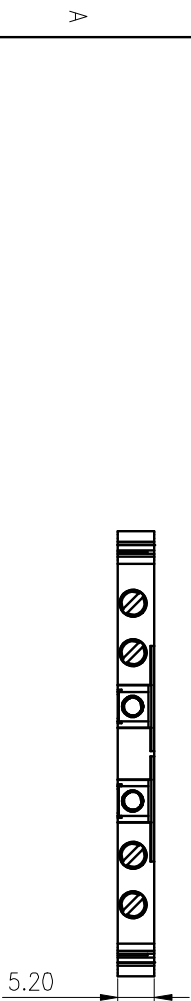

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cage	Copper alloy	Ni Plated
3	Current Carrier	Copper	Sn Plated
4	Screw1	Copper alloy	Ni Plated
5	Screw2	Copper alloy	Ni Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.04.03	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: Moo J 2020.04.03	DRAWING NO.:	PCDK2.5-01P-1Y-00A(H)	
DRAFT: ZYH 2008.01.12	TYPE:	CUSTOMER DRAWING	
SIZE: A4	SCALE:	1:1	
	REV	TO	
		1/1	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/特类等	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6.0	/	/
绕线扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.4		
绕线范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5/24~12		
间距/Pitch(mm)	5.20		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

PCDK2.5-01P-1Y-00A(H)