
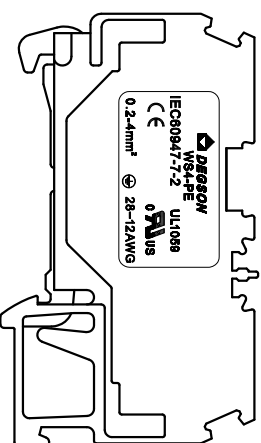
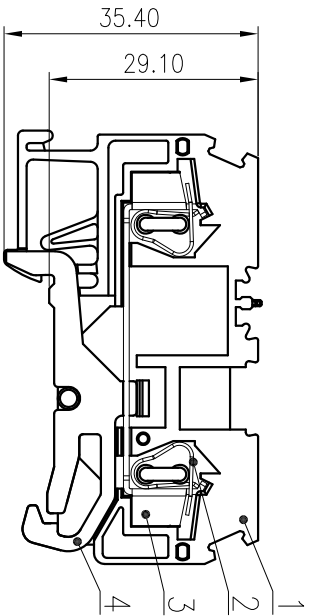


未注公差/General tolerances(mm)		
0	>3	>5
~	~	~
3	6	10
10	18	30
18	30	50
30	50	80
50	80	120
80	120	180
120	180	250
180	250	315
250	315	400
315	400	500
400	500	>500
>500		
0.1/10		1/10

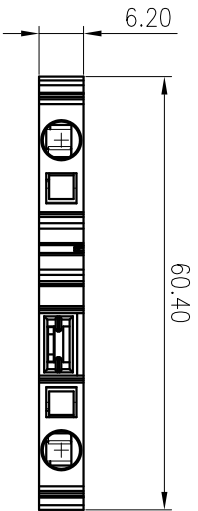

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
FC 标准 /EC Standard:	/	/	/
过压类别 /Overvoltage Category/污染等级 /Pollution Degree	III/3	/	/
额定电压/电流 /Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG)	0.2~4/28~12	/	/
间距 /Pitch(mm)	6.20	/	/
剥线长度 /Stripping length(mm)	13-14	/	/
使用温度范围 /Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求 /Conform to RoHS	Yes	/	/
标准颜色编号 /Standard color number:	PANTONE / RAL	/	/

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LI GL 2020.04.04

CHKD: Moo J 2020.04.04

DRT:Wang LX 2020.04.04

NAME: **DEGSON**® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

WS4-PE-01P-1C-00A(H)

DRAWING NO.: WS4-PE-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Spring	Stainless steel	
3	Current carrier	Copper	Sn Plated
4	Grounding	Copper alloy	Sn Plated

REV	ECN	DESCRIPTION	DRT	DATE

SIZE	mm	inch
A4		

REV	T1