
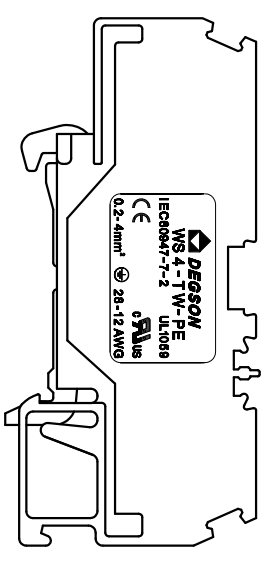

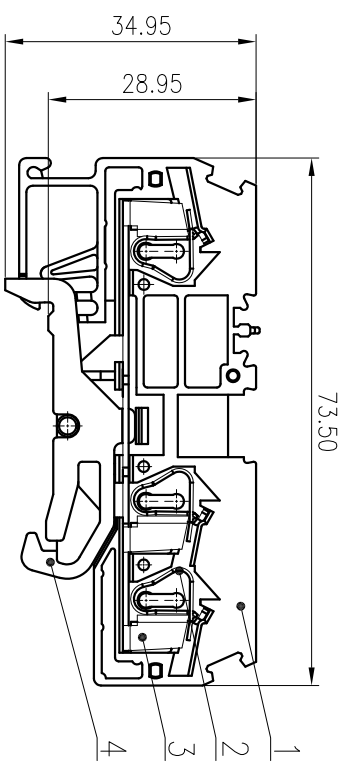


备注公差/General tolerances(mm)													
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	>500
E0.12	E0.18	E0.22	E0.26	E0.31	E0.37	E0.57	E0.80	E0.93	E1.05	E1.15	E1.60	E2.20	E2.50
													E7

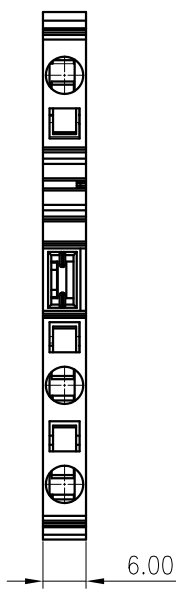

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
拧紧扭矩/Torque Tightening(N·m/Lb.in)	/	/	/
导线范围(硬导线/软导线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~4.0/28~12(Sol)	/	/
间距/Pitch(mm)	6.0	/	/
剥线长度/Stripping length(mm)	10-12	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.04.04

CHKD: Moo J 2020.04.04

DRT:Wang LX 2020.04.04

SIZE: A4

NAME: **DEGSON®** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

WS4-TW-PE-01P-1C-00A(H)

DRAWING NO.: WS4-TW-PE-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
4	Grounding	Copper alloy	Sn Plated
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

REV	EON	DESCRIPTION	DRT	DATE
1				