





94.5

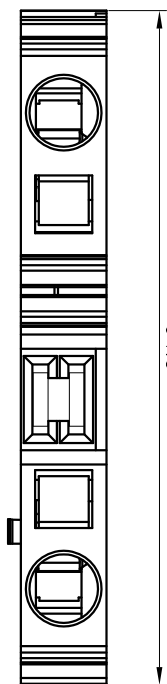

93.60

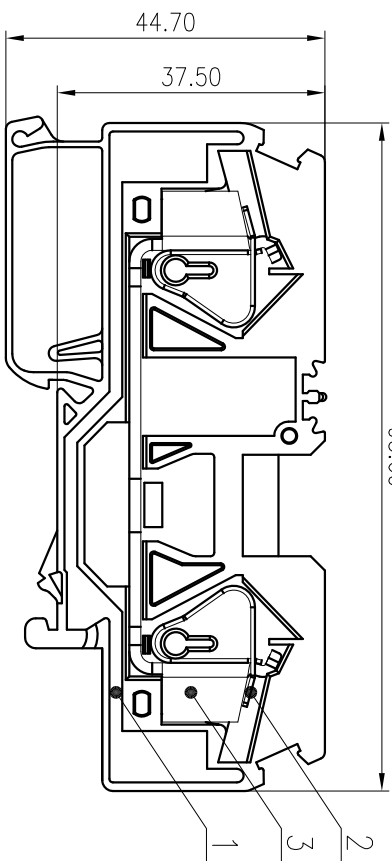

12.00

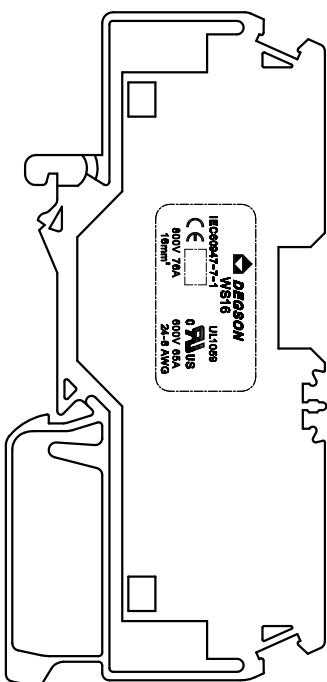

公差/容差 (General tolerances)(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
~	0.1/1.0
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.15
±1.60	±2.20
±2.50	±2.50
±27	±27

UL 标准 / UL Standard:	B	C	D
额定电压 / Rated Voltage (V) / Current (A)	600 / 65	600 / 65	600 / 5
EC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	/	/
额定电压 / 电流 / Rated Voltage (V) / Current (A)	800 / 76	/	/
额定脉冲电压 / 电压 / Rate Impulse Voltage (KV)	8.0	/	/
拧紧扭矩 / Torque Tightening (N·m / Lb.in)	/	/	/
柔软范围 (硬导线/软线) / Wire Range (rigid and flexible) (mm² / AWG)	0.2~16 / 24~6		
间距 / Pitch (mm) / 线数范围 / Poles	12.0		
剥线长度 / Stripping length (mm)	16-17		
使用温度范围 / Operating Temperature (°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: /

SURFACE: /

MAT NO.: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

NAME:

WS16-01P-1Y-00A(H)

APPD: LI\_GL\_2020.06.05

CHKD: Mao\_J\_2020.06.05

DRT: Wang\_Y\_2020.06.05

DRAWING NO.: WS16-C01

SIZE: A4

mm  
inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current Carrier	Copper	Sn Plate
2	Spring	Stainless Steel	
1	Housing	PA66	UL94V-0

REV

ECN

DESCRIPTION

DRT

DATE

4

5

6

7

8

9

10