
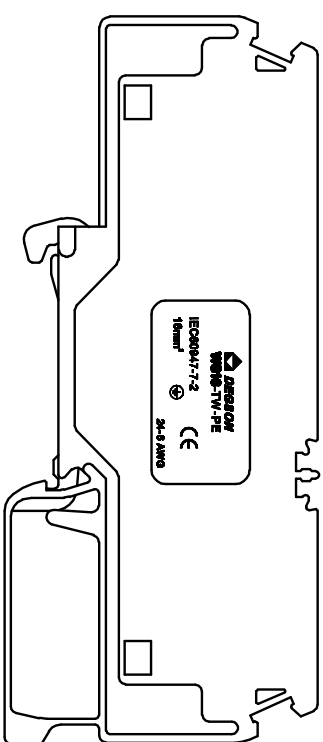
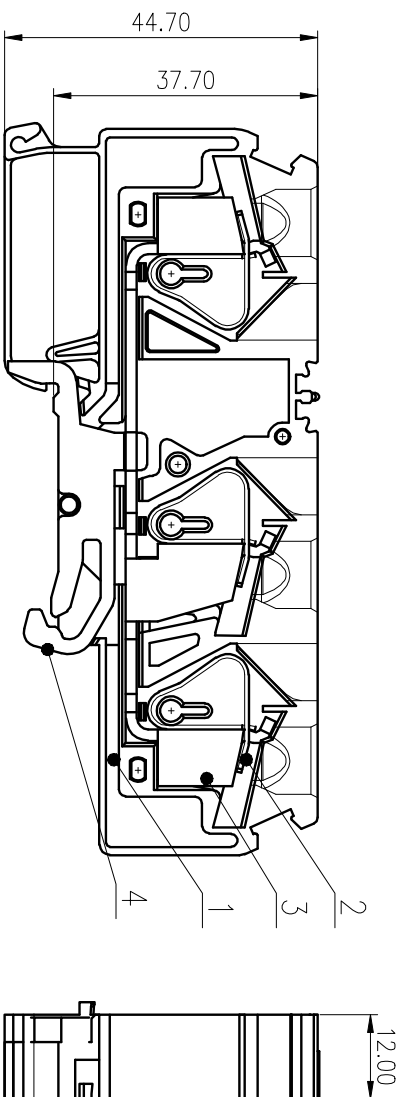


公差等级/General tolerances/(mm)		0.1/1/10	
0	>3	>6	>10
~	~3	~6	~10
3	6	10	18
±0.12	±0.18	±0.22	±0.26
	±0.31	±0.37	±0.57
	±0.80	±0.93	±1.05
	±1.15	±1.60	±2.20
	±2.50		
	±Z		

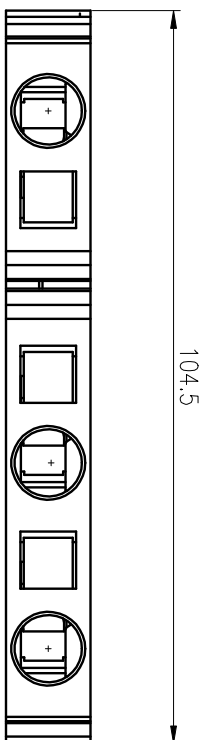

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 1:1	SHEET
1	Housing	PA66	UL94V-0								1/1
2	Spring	Stainless Steel									
3	Current Carrier	Copper	Sn Plate								
4	Ground Contact	Copper Alloy	Sn Plate								

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(裸线/带绝缘)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~16/24~6		
厚度/Pitch(mm)	12.0		
剥线长度/Stripping length(mm)	16~17		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL:	SURFACE:
/	/

MAT NO.:	STATUS:	APPD:	CHKD:	DRAFT:	TYPE:	SCALE:	REV
/	/	Li QI 2020.06.05	Moo J 2020.06.05	Wang Y 2020.06.05	CUSTOMER DRAWING	1:1	TO-1

NAME:	DRAWING NO.:
DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD	WS16-TW-PE-01P-1C-00A(H)

D	DESCRIPTION	DRAFT	DATE
1			

D

C

B

A

D

C

B

A