MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
10BS161

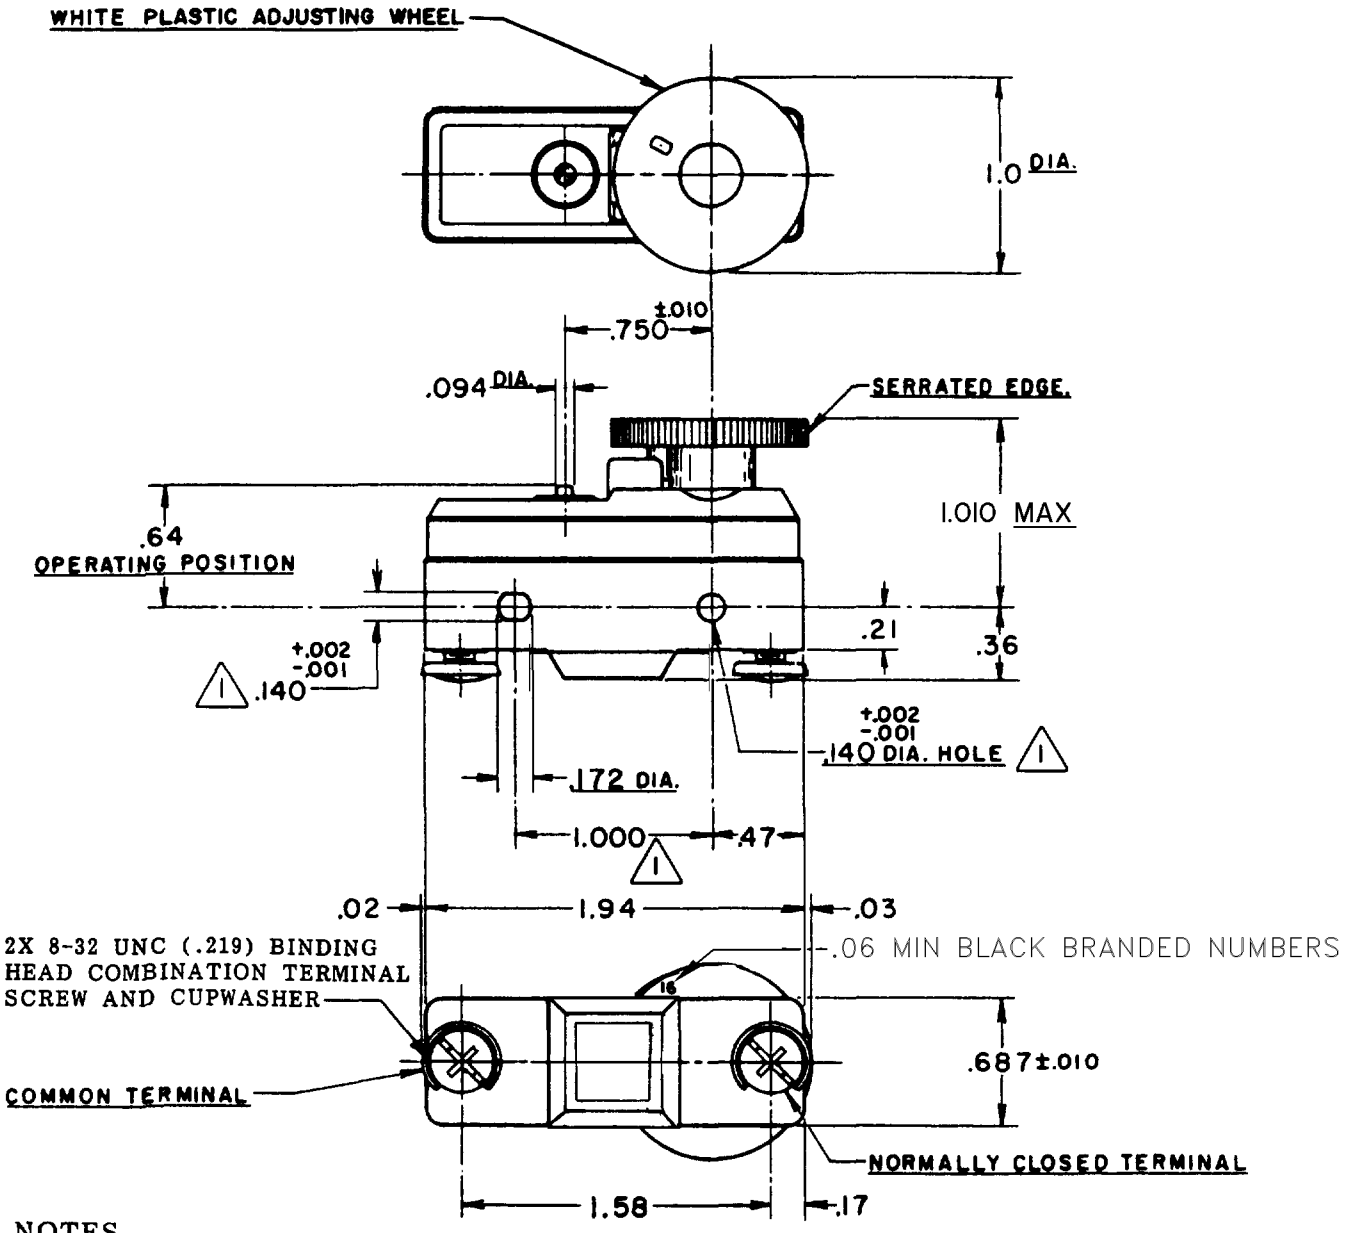

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 CENTERS
2 - MINNEAPOLIS-HONEYWELL REGULATOR CO. PART NO. "130914" BRANDED ON BOTTOM OF SWITCH
3 - DIAL WHEEL IS SHOWN AT THE MAX SETTING OF BREAK DISTANCE
4 - DIAL WHEEL ROTATION 300°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS (AT MIN SETTING)	ELECTRICAL DATA	SCALE FULL / DO NOT SCALE PRINT
AT MIN SETTING OPERATING FORCE — — — — — — — 17–22 OZ RELEASE FORCE — — — — — — — 14 OZ MIN DIFFERENTIAL TRAVEL — — — — .0025–.0035 OVERTRAVEL — — — — — — — — .014 MIN AT MAX SETTING DIFFERENTIAL TRAVEL — — — — — .007 MIN	CONTACT ARRANGEMENT SPNC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT

CATALOG LISTING 10BS161 PAGE 1 OF 1
RELEASE NO. PR-18724
REPLACES
ISSUE 9
CHECK
REVISIONS
A CO-81165 GJW 13 JULY 95
CHECK
CHECK WJC 13 JUL 95
DRAWN GJW 13 JULY 95
FORMTEK