



Position	Coplanarity
10 Pin	0.15mm
30 Pin	0.20mm
40 Pin	0.23mm
50 Pin	0.23mm

Plug Height Dim.A1	STACK HEIGHT(H1) (Socket Height) Dim.B1			
	5.05	6.05	6.55	7.54
4.72	7.00	8.00	8.50	9.50
5.72	8.00	9.00	9.50	10.50
6.22	8.50	9.50	10.00	11.00
8.23	NA	NA	12.00	NA
9.27	11.50	12.50	13.00	14.00
9.70	12.00	13.00	13.50	14.50
11.71	14.00	15.00	15.50	16.50
13.72	16.00	17.00	17.50	18.50

Rows	W	G	No Of Rows	A	B	C	D
4	7.06	2.01	10	17.68	15.80	11.43	16.28
5	9.60	3.05	15	24.03	22.15	17.78	22.63
6	9.60	3.05	19	29.11	27.23	22.86	27.71
8	12.14	3.05	20	30.38	28.50	24.13	28.98
10	14.68	3.05	25	36.73	34.85	30.13	35.33
12	17.22	3.05	30	43.08	41.20	36.83	41.68
14	19.76	3.05	40	55.78	53.20	49.53	54.38
			50	68.48	66.60	62.23	67.08

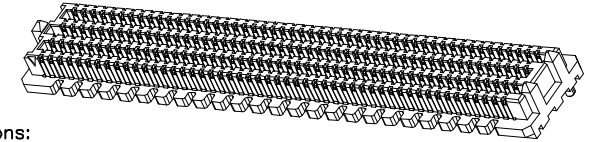

Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:240VAC
 Withstanding Voltage:700V AC/Minute
 Operating Temperature Range:-55°C To +125°C
 Operating Humidity Range:90%~95%
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:High conductivity copper
 Plating:Selective Gold Plated 10u'

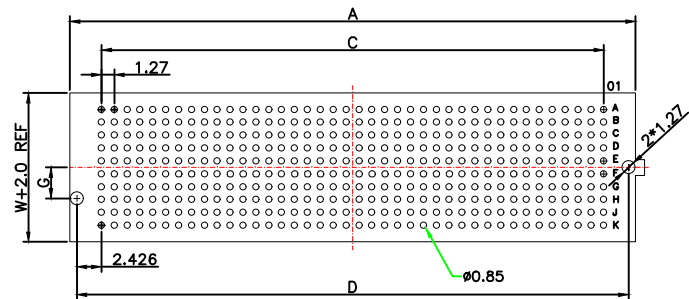

Recommended PCB Layout (BGA)

RoHS Compliant

E				DRAWN:	Haun Hung	GENERAL TOLERANCE:	NINGBO KLS ELECTRONIC CO.,LTD	
D				CHECKED:	Admire Chen	.X=±0.25 .XX=±0.20		
C						UNIT: mm	DESCRIPTION:	SIZE
B						SCALE:	1.27mm Pitch Board To Board Connector	A4
A	13-Nov-2021	(PC0434)	Haun Hung	APPROVAL:	Don Chen	SHEET: 1 / 1	PART NO:	
REV	DATE	FILE	BY			PROJECTION:	L-KLS1-B0113-622H400-M-TR	