RoHS Compliant

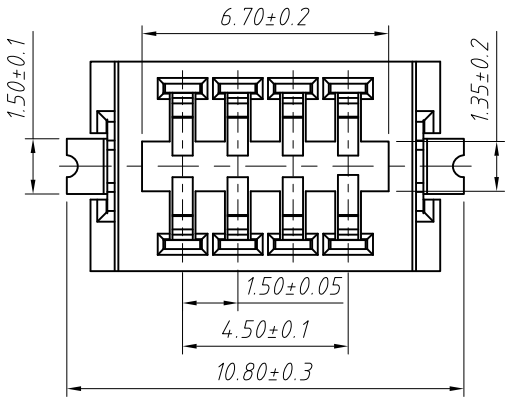

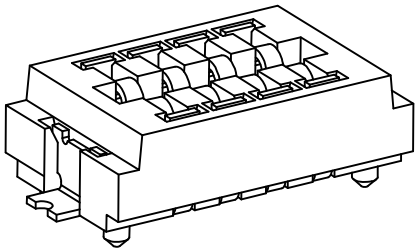

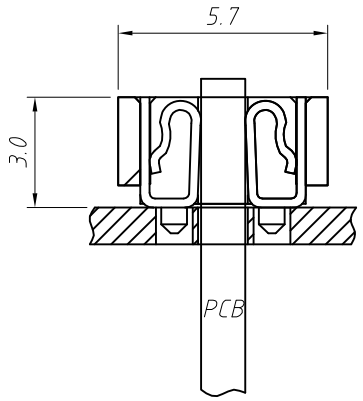

Assembly Layout

MATERIAL
Insulator:PA9T,UL94V-0,Beige
Contacts:Phosphor Bronze,Tin-plated
Solder Tab:Phosphor Bronze,Tin-plated

Main Specifications
Poles:8P
Contact Resistance:≤20mΩ
Insulation Resistance:≥1000MΩ
Rated Voltage:125V AC DC
Rated Current:1.0A AC DC
Withstanding Voltage:1000V AC/minute
Temperature Range: -40°C ~ +110°C

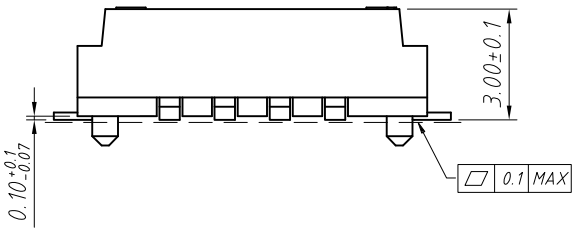



Order Information

L-KLS2- L54 -08P
- Number of poles
- Series No.
- RoHS

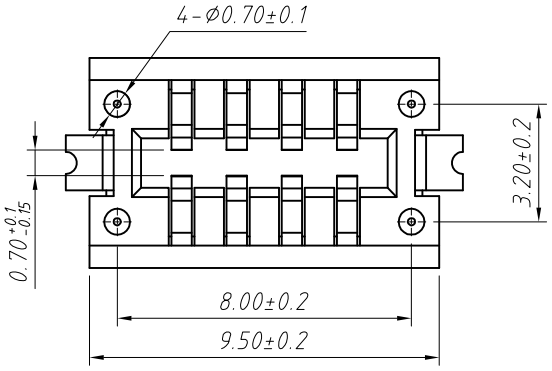

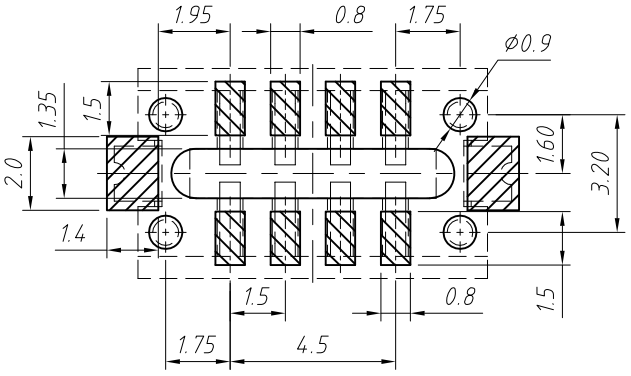

Board Layout

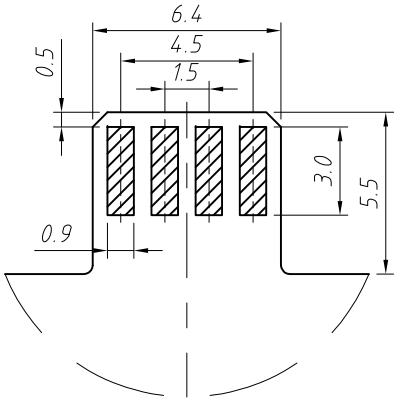

Mating PCB detail

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		Description:
X. ±0.15	X. ±5°	UNITS	mm	EDGE Connector
.X ±0.03	.X ±3°	SHEET SIZE	A4	for LED Lighting,Pitch 1.50mm
.XX ±0.05	.XX ±2°		KLS P/N:	L-KLS2-L54-08P
Draw by: Jenny	Date: 2018-03-10			
Check by: Daniel 2018.11.27 11:08:00 +08'00	Date: 2018-03-10			
SCALE	SHEET 1 OF 1			NingBo KLS ELECTRONIC CO.,LTD.