

Data sheet

Order No.: 1827334


Type: SMC 1,5/ 8-G-3,81

Header



The figure shows a 10-position version of the product

1 Main features

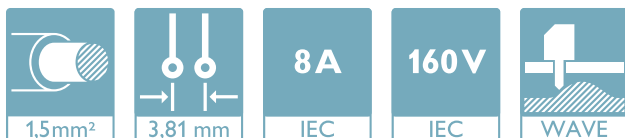

- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 8 | • Nominal current | 8 A |
| • Nominal cross section | 1.5 mm ² | • Nominal voltage | 160 V |
| • Color | green | • Connection direction | 45 ° |
| • Pitch | 3.81 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Angled connection enables multi-row arrangement on the PCB
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies




Make sure you always use the latest documentation.

It can be downloaded at: phoenixcontact.net/product/1827334

3 Table of contents

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Material data	4
6	Dimensions.....	4
	6.1 Dimensions for the product	4
	6.2 Dimensions for PCB design.....	4
7	Series drawing.....	5
8	Packaging information	5
9	Application.....	5
	9.1 Temperature limit values	5
10	Mechanical tests.....	6
11	Electrical tests	7
	11.1 Electrical data.....	7
	11.2 Air and creepage distances.....	7
12	Current carrying capacity/derating curves	8
13	Environmental and durability tests	9
	13.1 Vibration test	9
14	Classification for connectors.....	9
15	Approvals	9
16	Commercial Data.....	11
17	corresponding plugs	11
18	Accessories.....	11
19	Combination tests.....	12

4 3D model in PDF can be activated (Acrobat Reader only)

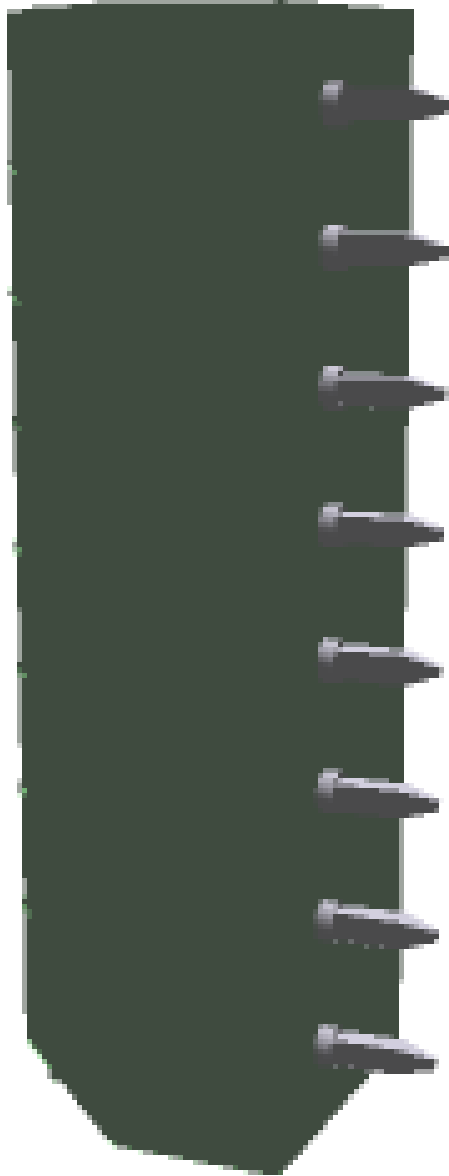

1827334 SMC 1,5/ 8-G-3,81**5 item properties**

Order No.	1827334
Type	SMC 1,5/ 8-G-3,81
Type of contact	Male connector
Range of articles	SMC 1,5/...-G
Pitch	3.81 mm
Number of positions	8
Locking	without
Mounting type	Wave soldering
Pin layout	Linear pinning

5.1 Material data

Material of metal parts		
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201	
Contact material	Cu alloy	
Surface contact area	Ni 2 µm ... 3 µm , Sn 5 µm ... 7 µm	
Soldering area surface	Ni 2 µm ... 3 µm , Sn 5 µm ... 7 µm	
Surface characteristics	Tin-plated	
Insulating material data	Housing	Housing
Insulating material	PA	
CTI according to IEC 60112	600	
Flammability rating according to UL 94	V0	
Color	green (6021)	

6 Dimensions**6.1 Dimensions for the product**

Length	13.1 mm
Width	31.87 mm
Height (without solder pin)	11 mm
Total height	14.4 mm
Solder pin [P]	3.4 mm
Dimension a	26.67 mm

6.2 Dimensions for PCB design

Hole diameter	1.2 mm
Pin dimensions	0,8 x 0,8 mm

1827334 SMC 1,5/ 8-G-3,81

7 Series drawing

8 Packaging information

Type of packaging	packed in cardboard
Pieces per package	50

9 Application

9.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1827334 SMC 1,5/ 8-G-3,81**10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	7 N
Withdraw strength per pos. approx.	4 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	22 N

1827334 SMC 1,5/ 8-G-3,81**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	8 A / 1.5 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	1.7 mΩ
Degree of pollution	2

11.2 Air and creepage distances


Component	Header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overtoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2.5 mm	1.5 mm	2 mm

1827334 SMC 1,5/ 8-G-3,81


12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	1.5 mm ²
Note	


Type: FRONT-MC 1,5/...-ST-3,81 with SMC 1,5/...-G-3,81

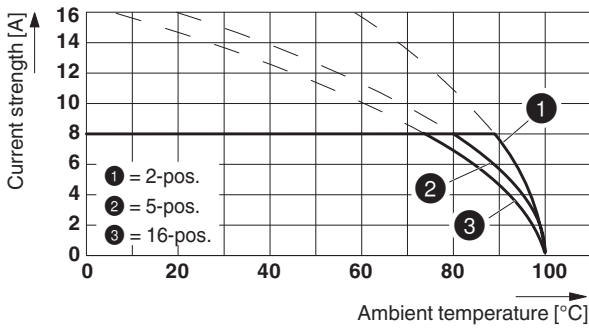

Type: FK-MCP 1,5/...-ST-3,81 with SMC 1,5/...-G-3,81

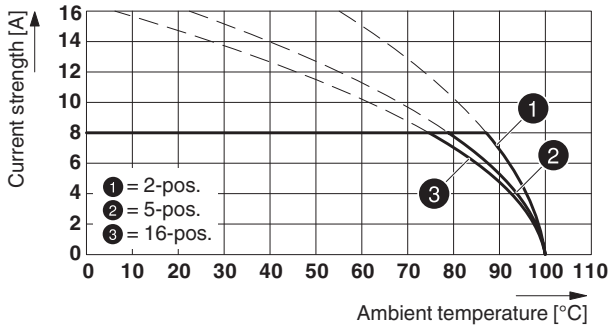

Type: FMC 1,5/...-ST-3,81 with SMC 1,5/...-G-3,81

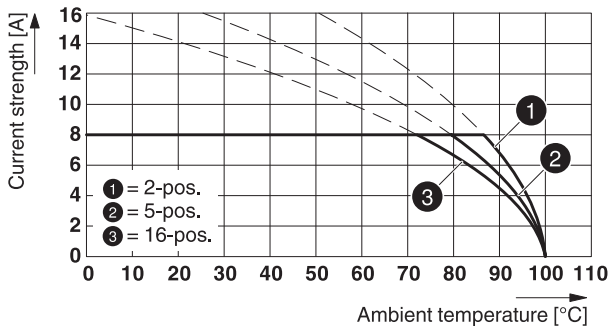


1827334 SMC 1,5/ 8-G-3,81**13 Environmental and durability tests****13.1 Vibration test**


Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis (pos. and neg.)


14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protection class	
Protective conductor	without PE
Lock	no

15 Approvals

CSA 				
Use group	B	D		
mm ² /AWG/kcmil				
Voltage	300 V	300 V		
Current	8 A	8 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

IECEE CB Scheme 				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

CCA				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

1827334 SMC 1,5/ 8-G-3,81

cULus Recognized 

Use group	B	D		
mm ² /AWG/kcmil				
Voltage	300 V	300 V		
Current	8 A	8 A		

EAC 

1827334 SMC 1,5/ 8-G-3,81**16 Commercial Data**

Order No.	1827334
Type	SMC 1,5/ 8-G-3,81
Pieces per package	50
Net weight	2.47 g
GTIN	4017918050122
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding plugs

Order No.	Type
1748037	FMC 1,5/ 8-ST-3,81
1803633	MC 1,5/ 8-ST-3,81
1827033	MCVW 1,5/ 8-ST-3,81
1827185	MCVR 1,5/ 8-ST-3,81
1850725	FRONT-MC 1,5/ 8-ST-3,81
1851106	FK-MCP 1,5/ 8-ST-3,81
1852231	MCC 1/ 8-STZ-3,81
1897458	QC 0,5/ 8-ST-3,81

18 Accessories


Description	Order No.	Type
Coding profile, is inserted into the slot on the plug or inverted header, red insulating material	1734634	CP-MSTB
	0804109	SK 3,81/2,8:FORTL.ZAHLEN
	0803883	SK U/2,8 WH:UNBEDRUCKT
	0805056	SK 3,81/2,8:SO
Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm	1051993	B-STIFT

1827334 SMC 1,5/ 8-G-3,81


19 Combination tests




SMC 1,5/-G




FRONT-MC 1,5/-ST



FK-MCP 1,5/-ST



FMC 1,5/-ST



MCVR 1,5/-ST

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 7 N / 4 N	approx. 8 N / 6 N	approx. 8 N / 6 N	
Polarization when inserted Requirement >20 N	Test passed	Test passed	Test passed	
Contact holder in insert Requirements >20 N	Test passed	Test passed	Test passed	
Durability tests (B)				
Contact resistance R ₁	1.7 mΩ	1.8 mΩ	1.6 mΩ	
Insertion/withdrawal cycles	25	25	25	
Contact resistance R ₂	1.8 mΩ	1.8 mΩ	1.8 mΩ	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV	2.95 kV	2.95 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV	1.39 kV	1.39 kV	
Insulation resistance Requirements > 5 MΩ	2 TΩ	> 0.2 TΩ	> 0.5 TΩ	
Thermal tests (C)				
Tested number of positions	16	16	16	
Tested conductor cross section	1.5 mm ²	1.5 mm ²	1.5 mm ²	
Test current	8 A	8 A	8 A	
Upper limiting temperature Requirements < 100°C	Test passed	Test passed	Test passed	
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h	100 °C/168 h	
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV	2.95 kV	2.95 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV	1.39 kV	1.39 kV	
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	