
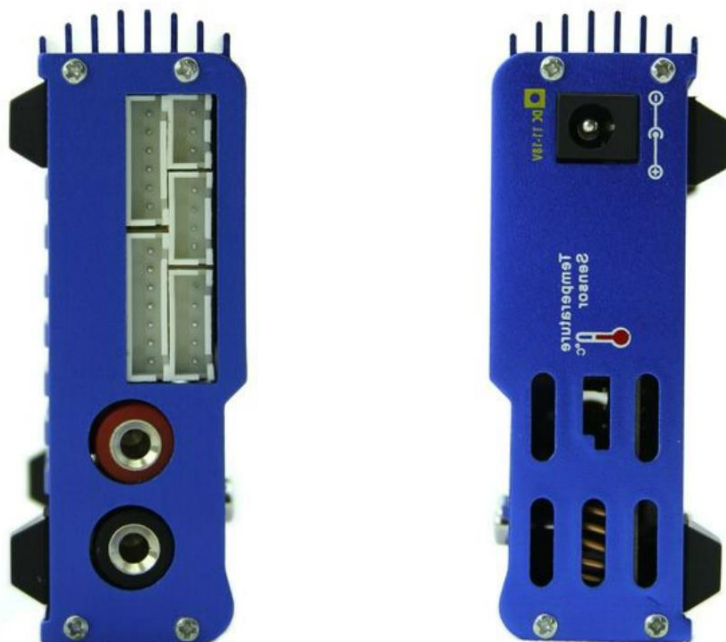


SEED-106990000

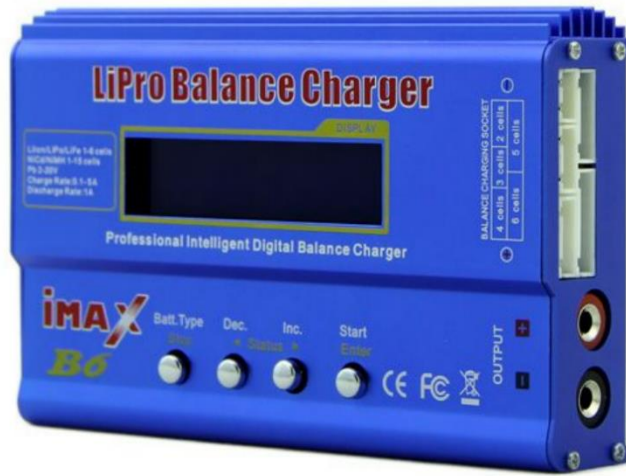

## PRODUCT DETAILS

LiPro Balance Charger iMAX B6 is a rapid charger with a high performance microprocessor and specialized operating software. It can be used to charge and discharge different cell sizes and battery types. Besides, it will also handle multiple cell batteries and balance the charge sent to each cell. Ideal for recharging different battery types, including NiCd/NiMH, Li-ion, LiPo, LiFe and Pb.

### Features

- Internal independent lithium battery balancer
- Balance the discharge of each individual cell
- Adaptable to various types of lithium battery
- “Fast” and “Storage” modes of lithium battery
- Auto-charge current limit
- Maximum safety
- Capacity limit
- Temperature limit
- Processing time limit
- Input power monitor
- Data store/load
- Cyclic charging/discharging

### Specifications

- Operating voltage range:DC11.0~18.9 Volt;
- AC to DC adaptor(DC11.0~18.0V/5S)
- Circuit power: Max.50W for charging,  
Max. 5W for discharging
- Charge current range: 0.1~5.0A
- Discharge current range: 0.1~1.0A
- Current drain for balancing Li-po: 300mAh/cell
- NiCd/NiMH battery cell count: 1~15cell
- Li-ion/Polymer cell count: 1~6 series
- Pb battery voltage: 2V~20V
- Weight: 277g(Net Weight)
- Dimensions: 133x87x33mm

### Pack List

- iMAX-B6 Lipro Balance Charger
- Charging Cables
- User Manual