
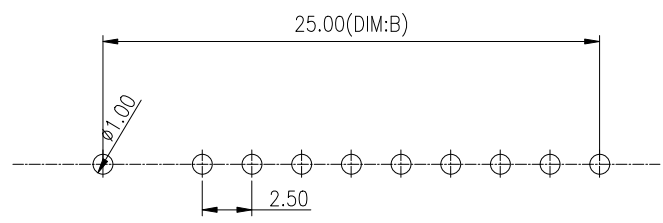
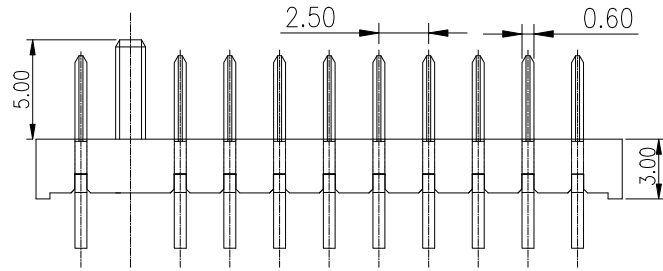


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	2016.04.07

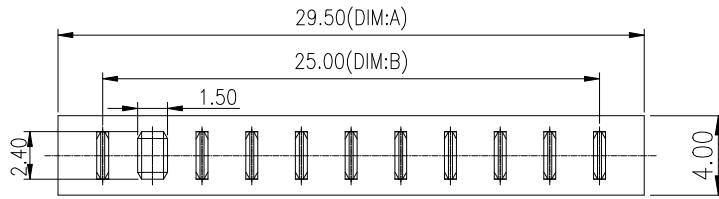

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

No. of Pins	Dimension	
	DIM.B	DIM.A
03	7.50	12.00
04	10.00	14.50
05	12.50	17.00
06	15.00	19.50
07	17.50	22.00
08	20.00	24.50
09	22.50	27.00
10	25.00	29.50

- NOTE:
- MATERIAL:
 - HOUSING: PA9T, UL 94V-0
 - TERMINAL: C2680
 - FINISH:
 - TERMINAL: NICKEL 50 μ"MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA OR Tin ON THE SOLDERING AREA.
 - PRODUCT SPECIFICATION
 - CURRENT RATING :5A
 - VOLTAGE RATING : 30V AC
 - DIELECTRIC WITHSTANDING VOLTAGE:500VAC
 - INSULATION RESISTANCE: 100MΩ min.
 - CONTACT RESISTANCE: 30mΩ Max.
 - Operating Temperature: -40° ~105°

NINGBO KLS ELECTRONIC CO.,LTD

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN		DATE		TITLE: Battery 180° 2.5mm Pitches Male Connector	
	APPROVED		DATE			
	PART NO	L-KLS1-LBC-04-7P-T1	REV:	01	SCALE:	1:1 UNIT: mm
	DRAWING NO		SIZE:	A4	SHEET:	1/1