





DGV4J-01P-1Y-00AH






精度等级/General	tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2.50	±Z

A

B

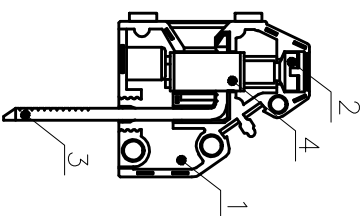
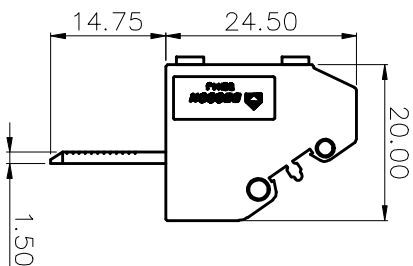
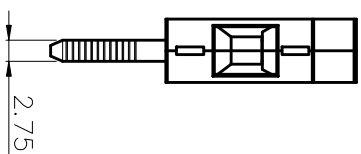


Without Cover

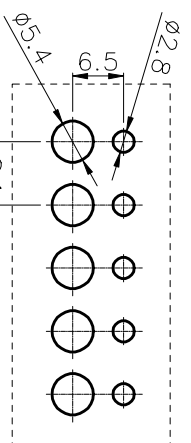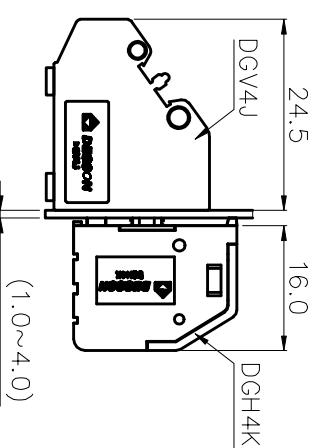

PCB LAYOUT

DGH4K-01P-1Y-00AH



Without Cover

C

D

ITEM	NAME OF PART	MATERIAL	NOTES
5	Housing2	PA66	UL94V-0
4	Cage	Copper alloy	M3/Ni Plated
3	Current Carrier	Copper	M3/Sn Plated
2	Screw	Copper alloy	M3/Sn Plated
1	Housing1	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	/		
CHKD:	/		
DRAFT:	CZM 2016.08.09	DRAWING NO.:	DGV4-C01
		TYPE:	CUSTOMER DRAWING
		SCALE:	2:1
		SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	/	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	400/41	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6	/	/
拧紧扭矩(螺栓和螺线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	M3, 0.5/4.43		
间距/Pitch(mm)/线数/Number of Poles	8.10/N=01P		
引线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

**DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
 宁波高松电子有限公司

DGV4-01P-1Y-00A(H)

D

B

A

C