



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

SURFACE MOUNT SILICON ZENER DIODES



VOLTAGE 5.1~5.6 Volt **POWER** 250 mWatt

FEATURES

- Planar Die construction
- 250mW Power Dissipation
- Zener Voltages from 5.1-5.6V
- Ideally Suited for Automated Assembly Processes
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)
- Green molding compound as per IEC61249 Std.. (Halogen Free)
- AEC-Q101 qualified

MECHANICAL DATA

- Case: DFN-2L, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0011 grams , 0.00004 ounces
- Polarity:Color band denotes cathode end

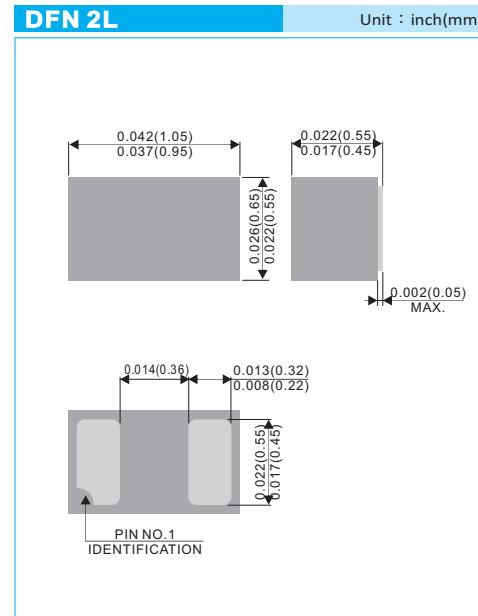

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Parameter	Symbol		Value		Units
Power Dissipation	PD		250		mW
Thermal resistance Junction to Ambient (Note 1)	R _{θJA}		500		°C/W
Operating Junction Temperature and Storage Temperature Range	T _J		-55 to +150		°C

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Part Number	Nominal Zener Voltage			Max. Zener Impedance			Max Reverse Leakage Current		Marking Code	
	Vz @ IzT			Z _{ZT} @ IzT		Z _{ZK} @ IzK		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
250 mWatts Zener Diodes										
BZT52-B5V1FN2-AU	5.1	5.00	5.20	60	5.0	480	1.00	2	2	W9
BZT52-B5V6FN2-AU	5.6	5.49	5.71	40	5.0	400	1.00	1	2	WA

NOTES:

1. Mounted on minimum pad layout .



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

RATING AND CHARACTERISTIC CURVES

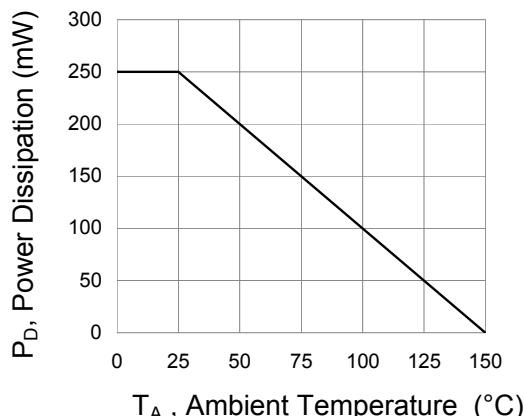


Fig.1 Steady-State Power Derating Curve

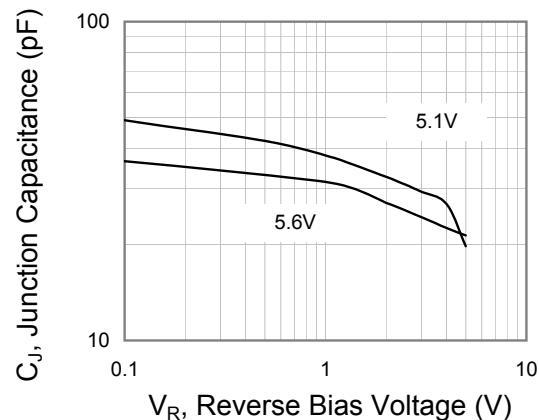


Fig.2 Typical Junction Capacitance

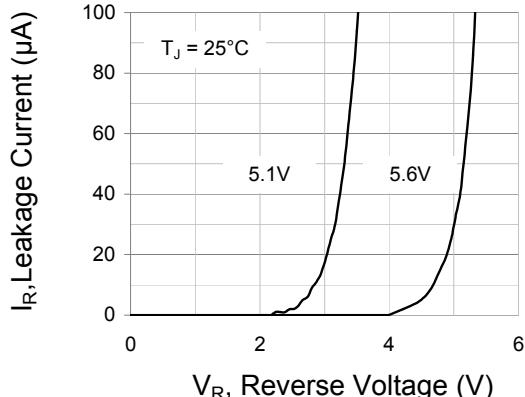


Fig.3 Typical Leakage Characteristics

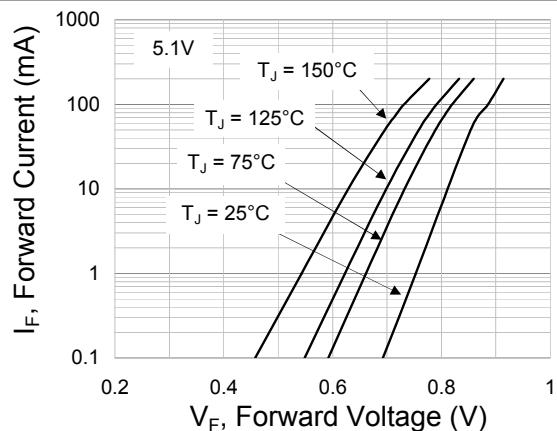


Fig.4 Typical Forward Characteristics

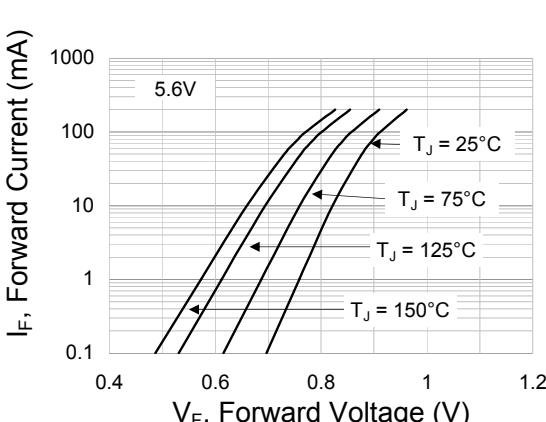


Fig.5 Typical Forward Characteristics

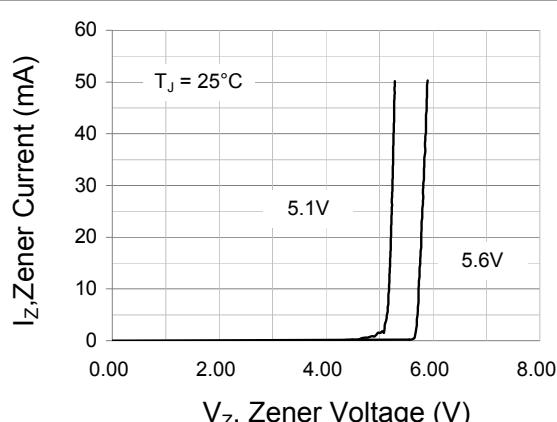


Fig.6 Typical Zener Characteristics



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

RATING AND CHARACTERISTIC CURVES


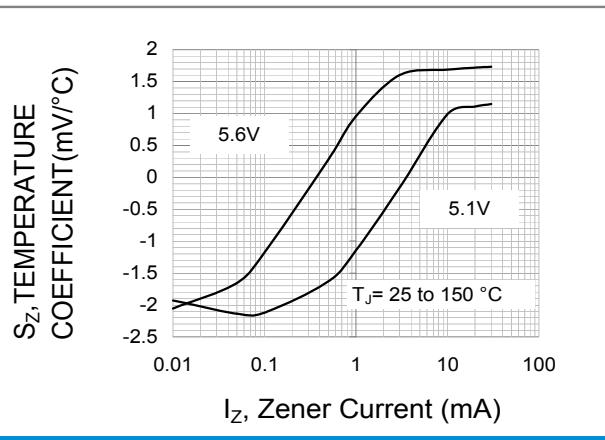


Fig.7 Temperature coefficient as a function of working current; typical values.



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

MOUNTING PAD LAYOUT

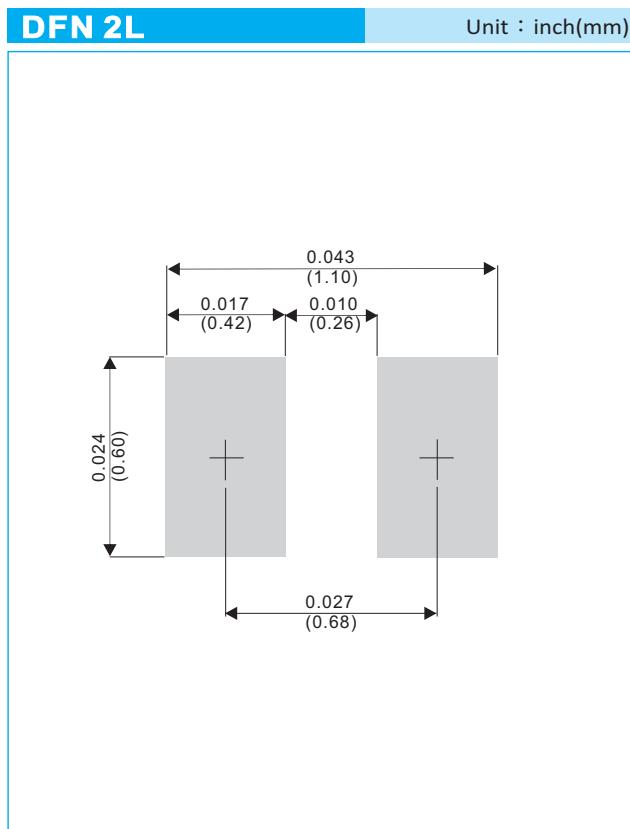

ORDER INFORMATION

- Packing information
T/R - 8K per 7" plastic Reel



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

Part No_packing code_Version

BZT52-B5V1FN2-AU_R1_000A1

For example :

RB500V-40_R2_00001

Part No.	<ul style="list-style-type: none"> • Serial number • Version code means HF • Packing size code means 13" • Packing type means T/R
----------	---

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



BZT52-B5V1FN2-AU~BZT52-B5V6FN2-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.