

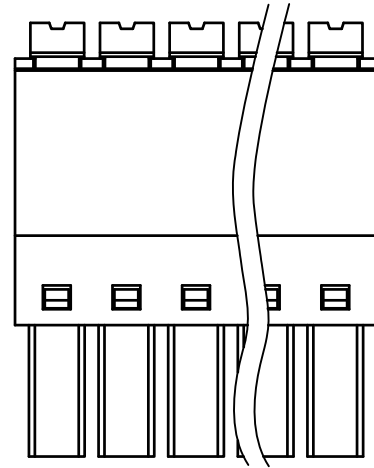
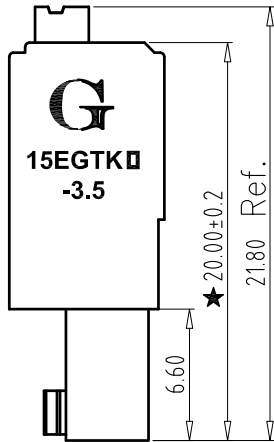
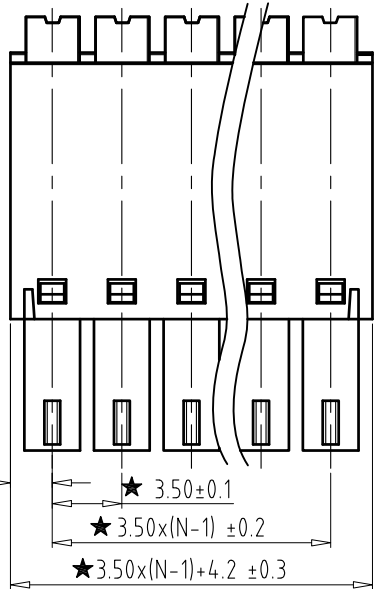
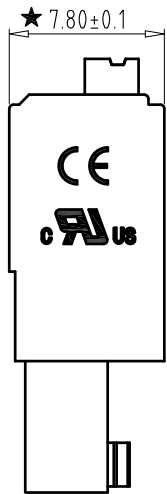


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.24

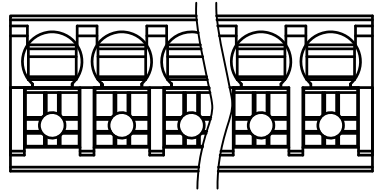

Electrical :

- 1. Rated Voltage : UL 300V IEC 250V
- 2. Rated Current : 8A 8A
- 3. Wire Range: 28-16AWG 0.2-1.0mm<sup>2</sup>
- 4. Stripping Length : 7-8mm
- 5. Withstanding Voltage : AC1600V/1Min.
- 6. Operating Temperature : -40°C~+105°C
- 7. RoHS Compliance
- 8. Safety Approval :
- 9. "★" is the key quality control point

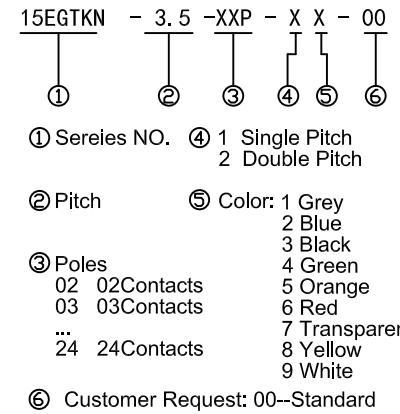

5	Clamp	XX	N	PHOSPHOR BRONZE	Tin Plated
4	Spring	XX	N	Stainless steel	/
3	Button	XX	N	POM UL94V-2	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//						
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	over 100	over 150	0.2	0.3	0.3	0.2	0.3	0.5
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 320	to 10	to 10	to 100	to 150						
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±0.90	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.06.24	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	15EGTKN-3.5-XXP-XX-00
				DWGNO.	XXXX

**Grolten** 宁波冠泰电子有限公司  
NINGBO GOLTEN ELECTRONICS CO., LTD.