


CERTIFICATION
OF THE QUALITY
SYSTEM OF THE
COMPANIES



Member of



The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

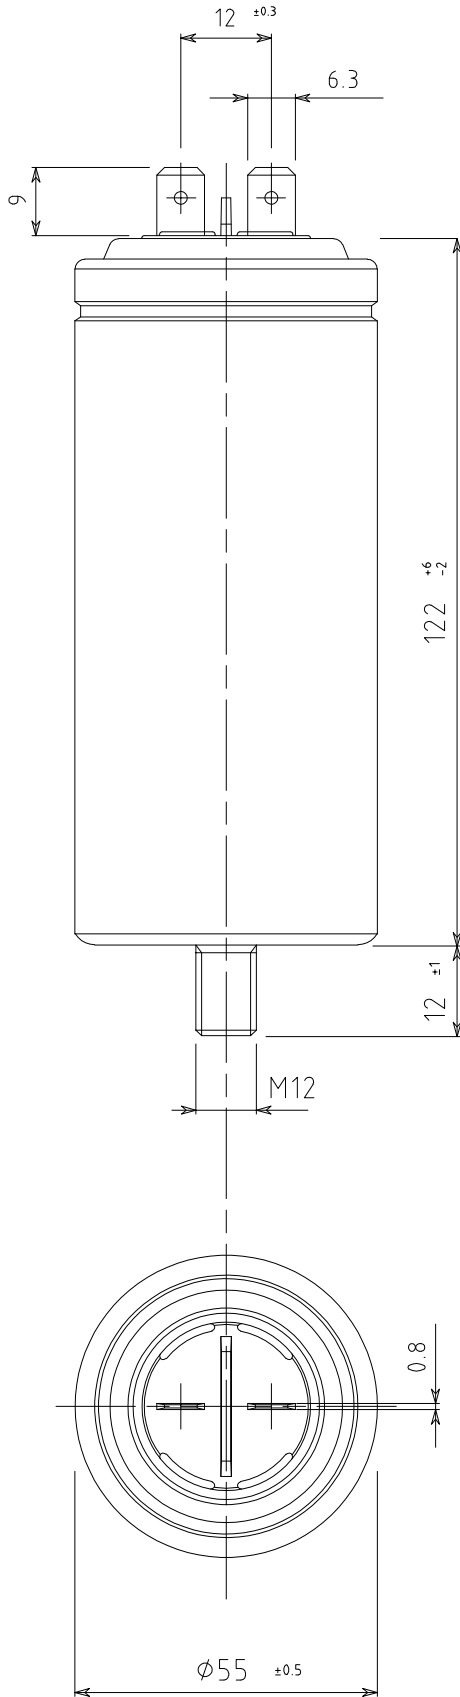

Characteristics:

- Dry metallized polypropylene capacitor.
- Case in aluminum.
- Capacitive element enclosed in an insulated can completely sealed with polyurethane resin.
- Cover in thermoplastic elastomer material.

Cover material properties:

- Ball pressure test (IEC 60695-10-2): 125°C
- Glow wire test (IEC 60695-2-11): 850°C
- Tracking resistance (IEC 60112): >= 250V

DUCATI part number: 416335629

Capacitance tolerance: 50 µF ±5%

Test voltage (routine test)

- Between terminals: 950Vac 2sec.
- Between terminals to case: 3kVac 2sec.

Climatic category: -25/85/21

Operation classes and approvals: see marking

Protection degree: IP00

Reference standard: EN60252-1/A1
UL810

Marking:




416.33.56.29

50 µF ±5%

475Vac 10000h/cl.B

50-60Hz -25/85/21 S2



EN 60252-1/A1

400Vac 50-60Hz
-25/70°C 10000AFC

PROTECTED

CSA C22.2 N° 190-M1985
Tamb.max 46°C



A Marking revision		Descrizione/Description		10/10/23	E. Parm.		
Ed.		MODIFICHE/REVISIONS		Data/Date Firma/Sign.			
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED
	OGGETTO/PART NAME	Dimensions for metallized polypropylene film capacitor for A.C. use.			CODICE/PART NR.	416335629	
				03/07/2012	Mollica		
						EDIZ./EDIT.	A