
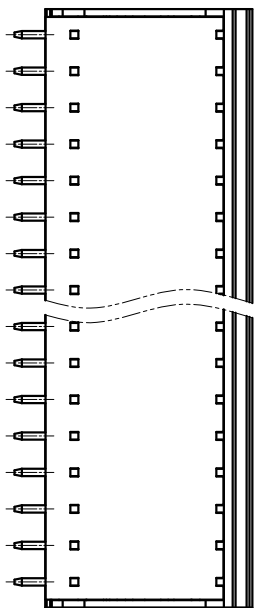
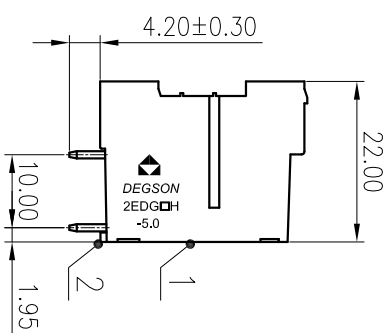
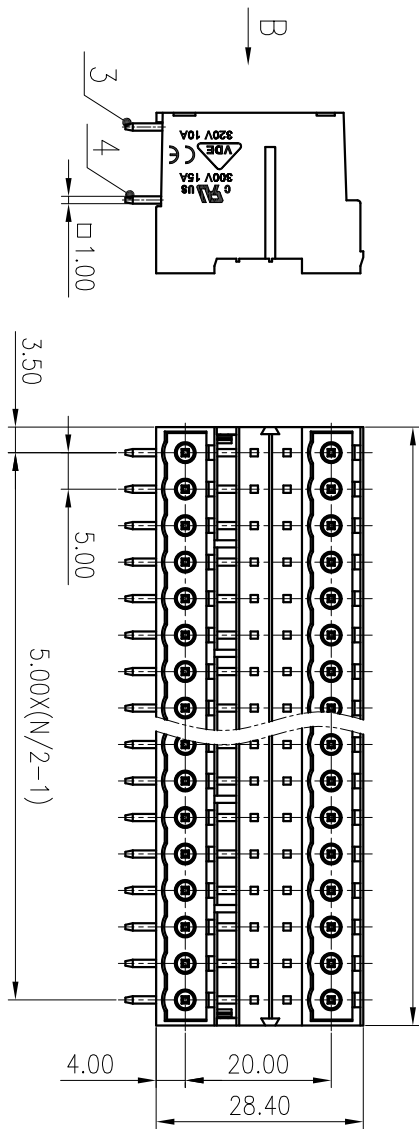


PCB LAYOUT

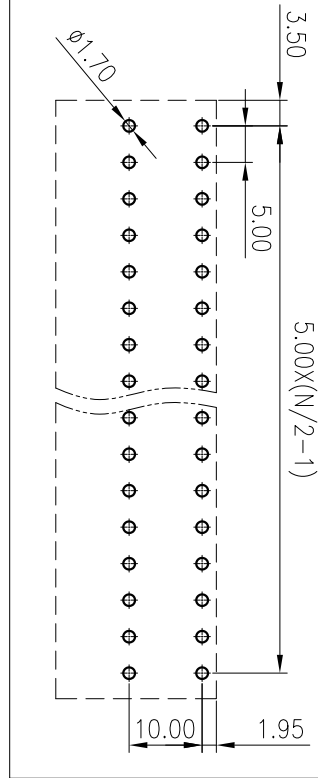

VIEW B

标注公差/General tolerances(mm)			
0	>3	>6	>10
~	>18	>30	>50
3	~	>18	>30
6	~	30	50
10	~	50	80
18	~	80	120
30	~	120	180
50	~	180	250
80	~	250	315
120	~	315	400
180	~	400	500
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.80	±2.20
±2.50			
0.1/10			
1/2'			

文 管
研 发
2020.05.19
中 心
专 用
(仅限内部使用, 对外无效)

MATERIAL:	/		
MAT NO.:	/		
STATUS:	/		
APPD: LonC/H	2020.05.19		
CHKD: GongYzh	2020.05.19		
DRFT: BYH	2018.09.28		
SIZE: A4	mm		
	(inch)		
NAME:	2EDGRH-5.0-XXP-1Y-00A(H)		
DRAWING NO.:	2EDGRH-5.0-C02		
TYPE:	CUSTOMER DRAWING		
SCALE:	1:1		
SHEET:	1/1		
REV:	T1		
ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Long Pin	Copper	Sn plated
4	Short Pin	Copper	Sn plated
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	320/10		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4		
间距/Pitch(mm)/线数范围/Poles	5.0/N=04~48P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
SURFACE:	/		

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

REV	ECN	DESCRIPTION	DRFT	DATE
T1		Change frame	CenSL	2020.05.19