



*DC COMPONENTS CO., LTD.*

RECTIFIER SPECIALISTS

SM4001  
THRU  
SM4007

*TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SILICON RECTIFIER*  
*VOLTAGE RANGE - 50 to 1000 Volts*      *CURRENT - 1.0 Amperes*

**FEATURES**

- \* Ideal for surface mounted applications
- \* Low leakage current
- \* Glass passivated junction

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: Solder plated solderable per MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.12 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



SM-1(DO-213AB)



Dimensions in inches and (millimeters)

	SYMBOL	SM4001	SM4002	SM4003	SM4004	SM4005	SM4006	SM4007	UNITS	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current T <sub>A</sub> = 55°C	I <sub>O</sub>	1.0							Amps	
Peak Forward Surge Current IFM(surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	30							Amps	
Maximum Forward Voltage at 1.0A DC	V <sub>F</sub>	1.1							Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	@ T <sub>A</sub> = 25°C	5.0							μAmps
		@ T <sub>A</sub> = 125°C	50							
Typical Thermal Resistance (Note 2)	R <sub>θJC</sub>	20							°C/W	
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	15							pF	
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150							°C	

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VDC  
2. Thermal resistance (Junction to Ambient),.24in<sup>2</sup> (6.0mm<sup>2</sup>) copper pads to each terminal.

# RATING AND CHARACTERISTIC CURVES (SM4001 THRU SM4007)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

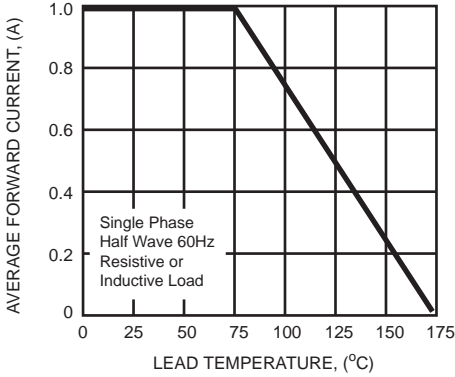


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

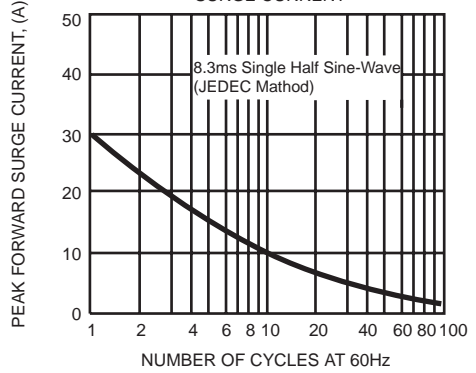


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

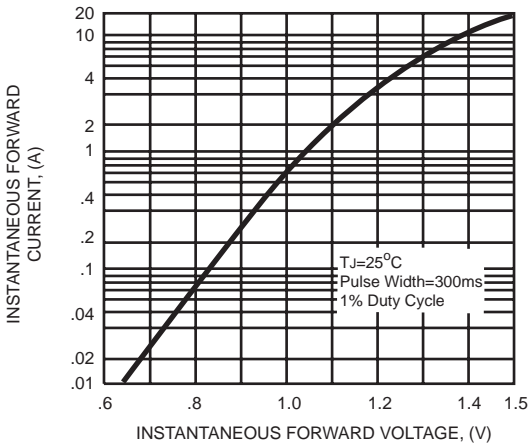


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


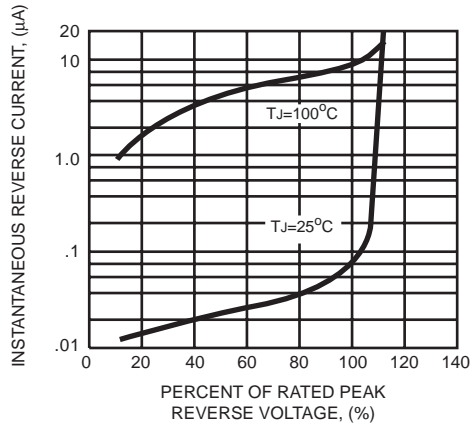


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

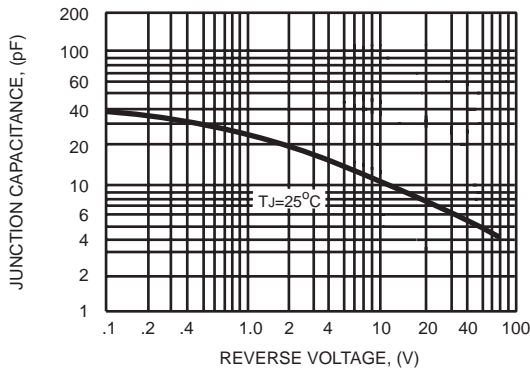

DC COMPONENTS CO., LTD.