

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25°C to +85 °C

MATERIAL

Insulator: PBT+30%G.F., UL94V-0, Black
 Contact Pin: Copper Alloy

NOTE

10P-16P: W/O Slot A and B
 20P-50P: With Slot A, W/O Slot B
 60P-64P: With Slot A and B

ORDER INFORMATION

5EH1FSANN - XX XX X X X L - 00

No. of Contacts
 (10, 14, 16, 20, 26,
 30, 34, 40, 50, 60,
 64)



S0: Selective
 SA: 5u"
 SB: 10u"
 SF: 15u"
 SD: 30u"

1: W/O Peg & Long Ejector
 Dim. C=14.35mm

 3: W/O Peg & Short Ejector
 Dim. C=10.60mm

A: Tray, W/O Cap
 T: Tube, W/O Cap

RoHS

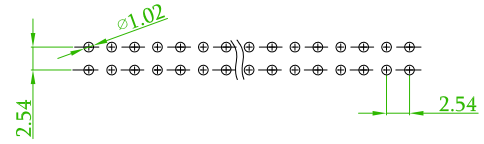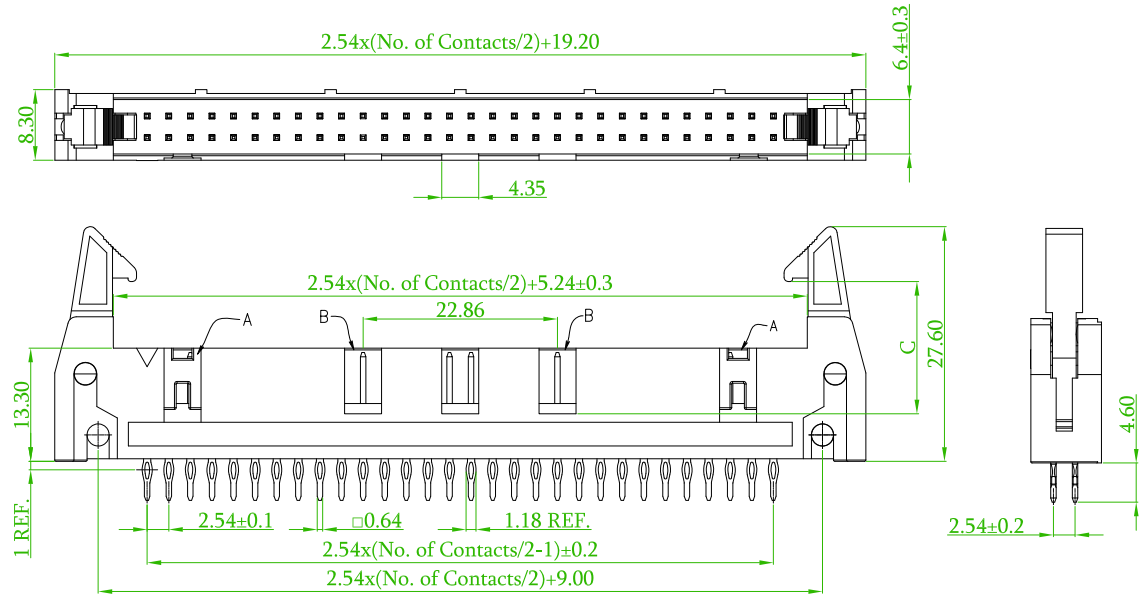

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05 , T=1.6/2.0)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	2.54mm EJECTOR HEADER PRESS FIT TYPE			頁數 Page	1/1
	品號 PART NO.	5EH1FSANN-XXXXXXL-00			繪圖 DRAWN	Gary
	圖號 DRAWING NO.	GN003-GA940	版本 REV.	A	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	