

PLUG: WTB 20 PR9 J
 RECEPTACLE: WTDXA 20 S JT
 XXXXX XX XXX XX

PLUG

RECEPTACLE

SERIES

| | |
|---|--|
| WTB Plug, right angle, with mounting ears | WTDXA Receptacle, straight, crimp removable, without mounting ears |
|---|--|

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

| | |
|---|---|
| XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70) | XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70) |
|---|---|

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.


| | | | |
|--|---|------------------------------------|--|
| TYPE CONTACTS/TERMINATIONS: | | TYPE CONTACTS/TERMINATIONS: | |
| PR7 Pin, right angle, dip solder, .109" x .025" dia | S Socket, straight, crimp removable, 22 AWG | SA Same as above | P Pin, straight, crimp removable, 22 AWG |
| PR9 Pin, right angle, dip solder, .140" x .025" dia | | | |
| PR11 Pin, right angle, dip solder, .172" x .025" dia | | | |
| PRW40 Pin, right angle, wire wrap [®] , .625" | | | |

HARDWARE

| | |
|----------------------------------|----------------------------------|
| SY Guide set | SY Guide set |
| SY-# Guide set, polarized | SY-# Guide set, polarized |
| J Fixed jackset | J Fixed jackset |
| JT Turning jackset, .435" | JT Turning jackset, .500" |
| JTA Turning jackset, .135" | JTA Turning jackset, .200" |
| JTB Hex turning jackset, .135" | JTB Hex turning jackset, .200" |
| JTC Hex turning jackset, .435" | JTC Hex turning jackset, .500" |
| JTL Turning jackset, long, .635" | JTL Turning jackset, long, .700" |

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.
- 443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
- 444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
- 478 Drill mating side hole diameter designated by dash number.
- 515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
- 548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
- A53 Socket, straight, crimp removable, 20 AWG
- C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
- F68 Combine -C45 and -515 special codes.

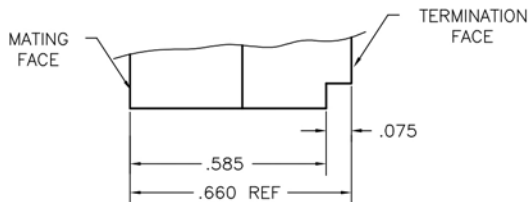

DETAIL A