

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 摩手給予印刷權限，否則禁止設計、製圖、利用、交流本文件的內容，侵犯者將負賠償責任。本公司保留對涉及專利、實用新案和外觀專利的所有權利。

FOR-1754 Rev.1.2

2

3





4

5

6

Dimensional tolerance(mm)					
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.25	±0.35	±0.55	±0.80	±1.10	

额定电压电流/Rated Voltage/Current	10V/1A
绝缘电阻/Insulation resistance	≥100MΩ
耐电压/Withstanding voltage	500V AC
使用温度范围/Operating temperature(°C)	-20~+80
线材外被/Jacket material	PVC
线材颜色/Jacket color	Black
线材外径/Jacket diameter (mm)	6.7±0.3
线材循环周期/Cable cycle	10 million
螺钉扭矩/Torque (kgf.cm)	2.04
对插规格/Matching Specification	DGFA9S-A1-00A(H) DGFA9S-A1-01A(H)
防水等级/Levels of protection	IP67
符合RoHS环保要求/Conform to RoHS	YES

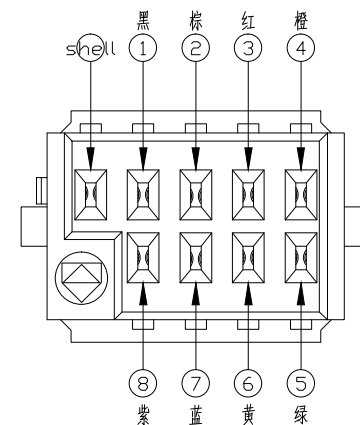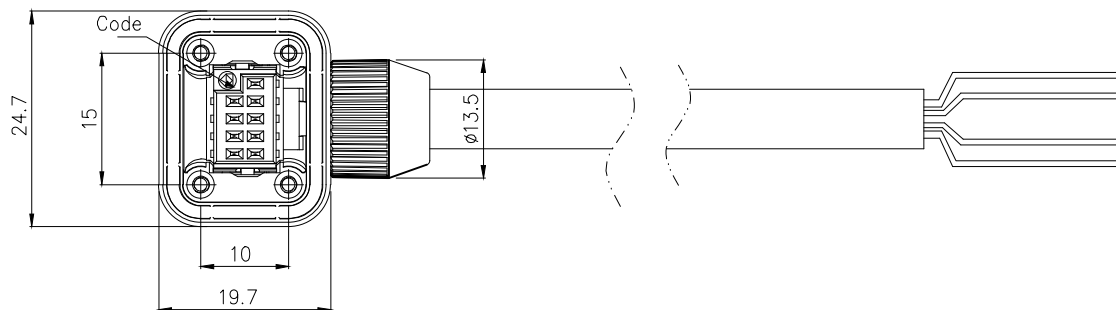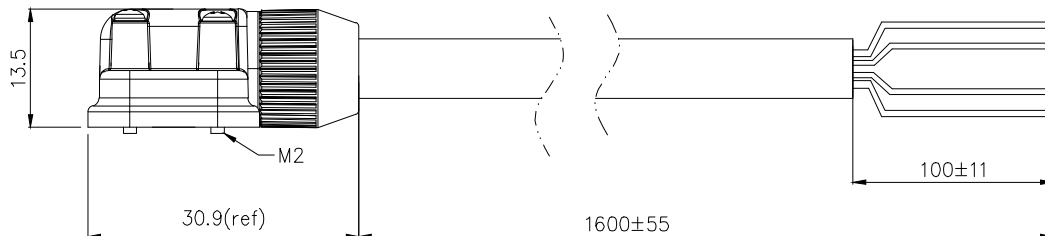

MATERIAL: /		SURFACE: /	
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:		NAME: DGFA9S-B1-1600-TRG050 ⁰¹	
CHKD:			
DRFT: Gao Q 2022.04.24		DRAWING NO.: XXX	
4		REV	01
 SIZE: A4 		TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1

01	/	The name change	GAO Q	2022.05.24
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6