

● SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C ± 3°C	±20 ppm max
TURNOVER TEMPERATURE	+25 ± 5°C
TEMPERATURE COEFFICIENT	(-0.03 ± 0.01) ppm / °C ²
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C
AGING	±3 ppm first year max
LOAD CAPACITANCE	6 pF
EQUIVALENT SERIES RESISTANCE AT 25°C ± 3°C	50 kΩ max ↔
SHUNT CAPACITANCE	1.1 pF typ
MOTIONAL CAPACITANCE	4.1 fF typ
Q VALUE	13,000 min
DRIVE LEVEL	0.1 μW typ, 0.5 μW max
INSULATION RESISTANCE	500 MΩ min @ DC 100V






Photo not actual part

● MECHANICAL SPECIFICATION

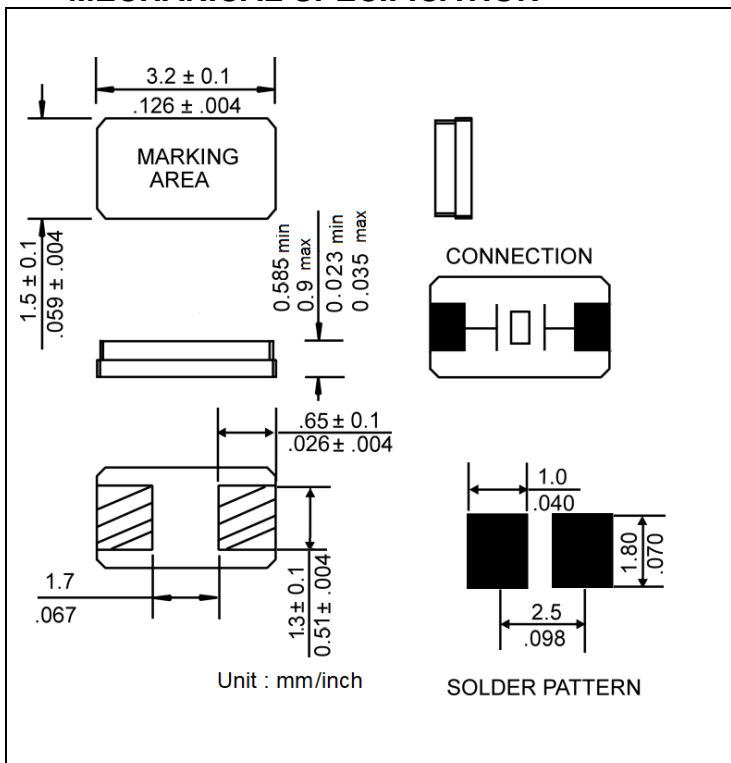

● CARRIER TAPE DIMENSIONS

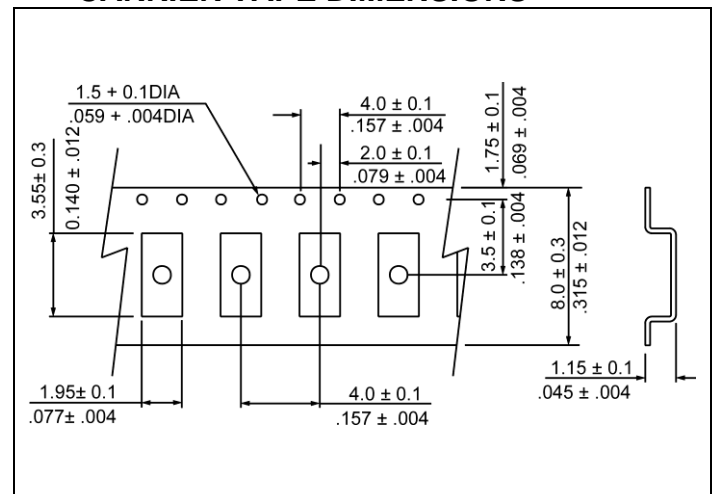


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● PACKAGING

330 mm REEL DIAMETER
 8 mm TAPE WIDTH, 4 mm PITCH
 QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

● **REFLOW PROFILE**

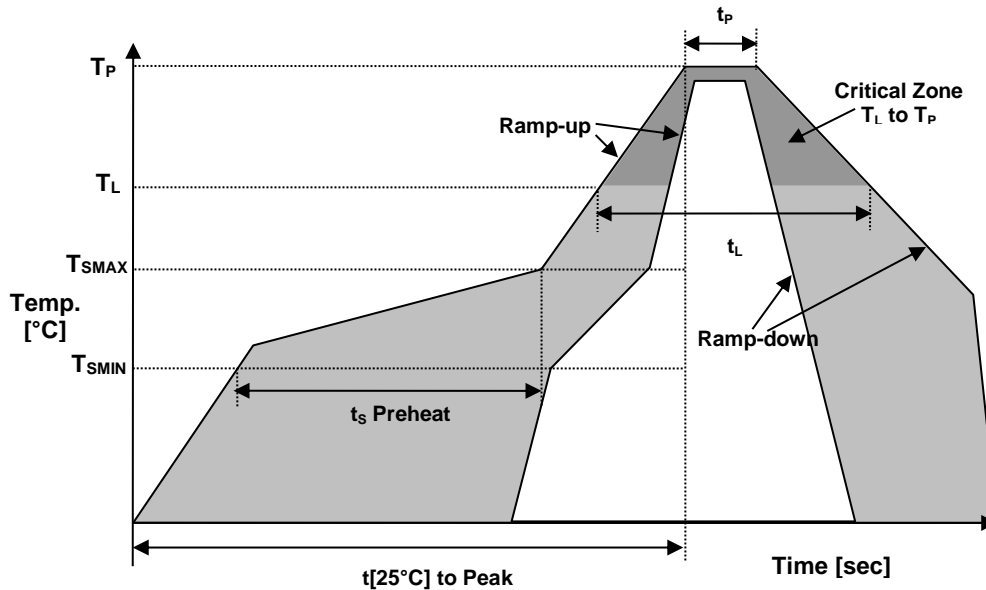

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	t_L	60-150 sec.

● **ENVIRONMENTAL**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



● MARKING

Xywwx

X – Internal Production ID code (J, R, T, Y, M, R, N, AA)
y – Year code
ww – Week code
x – 1 or 2 digits as Lot code

ymxxx

y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
xxx – Lot code

XLzymb

X – Internal Production ID code (J, R, T, Y, M, R, N, AA)
L – Load capacitance code (A: 12.5pF B: 9pF C: 7pF Z: others)
z – Lot code
y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
d – Day code

XzymF_{xx}^{xx}

X – Internal Production ID code (J, R, T, Y, M, R, N, AA)
z – Frequency code
y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
_{xx}^{xx} – Lot code

Xywwx 32.768

X – Internal Production ID code (J, R, T, Y, M, R, N, AA)
y – Year code
ww – Week code
x – 1 or 2 digits as Lot code

32.768

3Xyx

3 – Item code
X – Internal Production ID code (J, R, T, Y, M, R, N, AA)
y – Year code
x – 1 or 2 digits as Lot code



A RAMI TECHNOLOGY Company

● APPROVAL

Drawn By:	FP, 18 February 2014
Approved By:	FP, 18 February 2014
Revision:	A, Initial Release Updated to current specs KJ 9/2/16 Updated to current spec levels KJ 2/7/17
	B, AR, October 06, 2021 Updated the Current Revision Levels
	C, Updated to current spec levels by XLiu, April 29, 2022

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.