
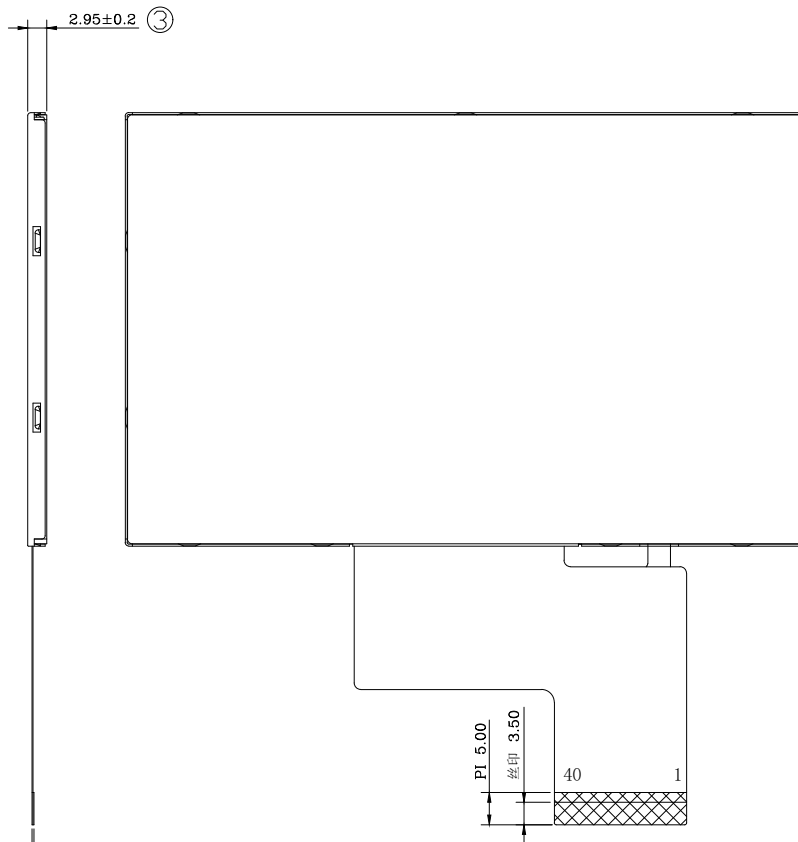



LCM PIN Definition

Pin	Symbol	Description
1	LED-	Power for LED
2	LED+	Power for LED
3	GND	Power ground
4	VDD	Power supply
5	R0	Blue data (LSB)
6	R1	Red data
7	R2	Red data
8	R3	Red data
9	R4	Red data
10	R5	Red data
11	R6	Red data
12	R7	Red data (MSB)
13	G0	Green data (LSB)
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data
19	G6	Green data
20	G7	Green data
21	B0	Blue data (LSB)
22	B1	Blue data
23	B2	Blue data
24	B3	Blue data
25	B4	Blue data
26	B5	Blue data
27	B6	Blue data
28	B7	Blue data (MSB)
29	GND	Power Ground
30	PCLK	Pixel clock
31	DISP	Display on/off
32	HSYNC	Horizontal sync signal
33	VSYNC	Vertical sync signal
34	DE	Data enable
35	NC	NC
36	GND	NC
37	XR	NC
38	YD	NC
39	XL	NC
40	YU	NC

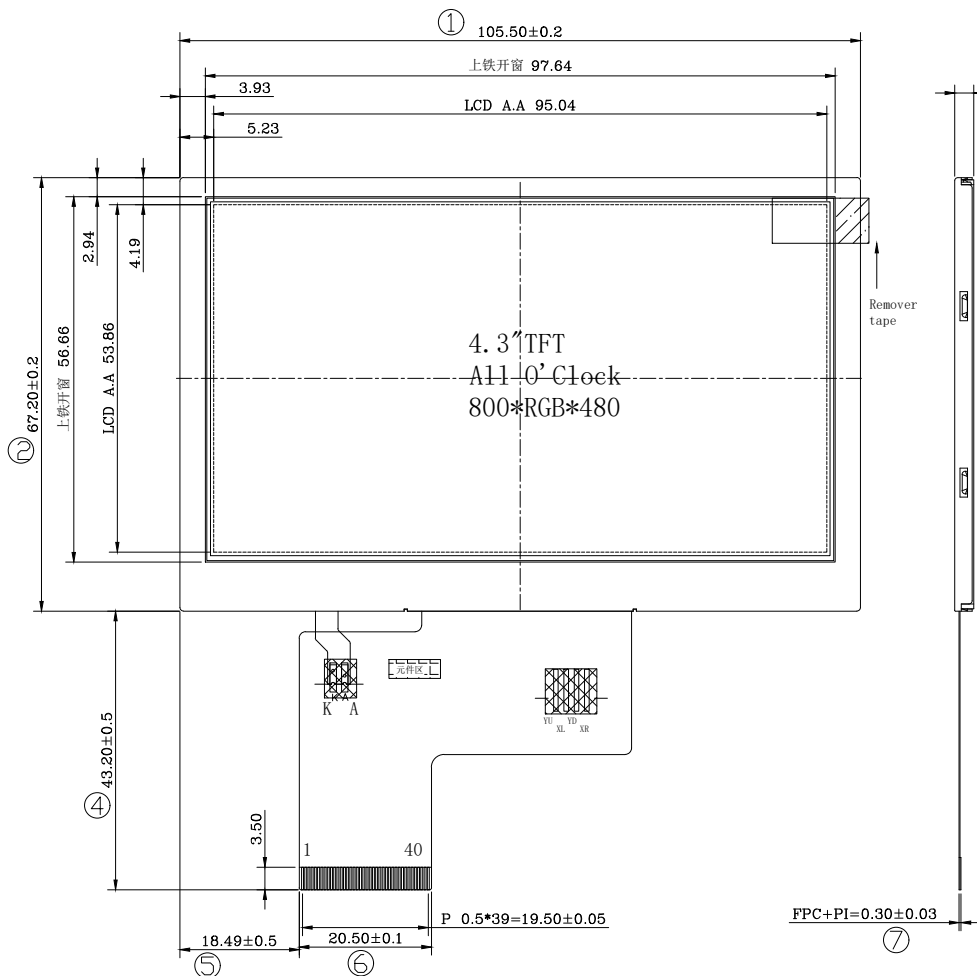

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑦



LCD Type	4.3\"TFT, Transmissive Normally black, IPS
Resolution	800(RGB)*480
View Direction	All O'CLOCK
LCD Driver IC	ST7262E43
Color Depth	16.7M
Interface Types	RGB
Operating voltage	3.3V
TP/Lens	Without
Backlight LEDs	10 LEDs, 40mA, 15.5V
Surface luminance	400(Min)-440(Typ) cd/m ²
Operating temperature	-20 °C ~ 70 °C
Storage temperature	-30 °C ~ 80 °C

版本 (Version)	变更记录 (Change History)	日期 (Date)
A0	Initial release	2020.03.11
A1	按样品实测亮度, 增加亮度参数	2020.06.16

设计 (DESIGN)	Bill
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

TSD 一 众 显 示
TEAM SOURCE DISPLAY

TITLE: LCM	页面 (Page) 1 / 1
Drawing No. TST043WVBS-79	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle)