


PIN:	SYMBLE
1	NC
2	VDD
3	VDD
4	NC
5	NC/RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	NC
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+

NOTES:

- 1. GENERAL TOLERANCE: ±0.2
- 2. () REFERENCE DIMENSION
- 3. Important dimension: ①~③

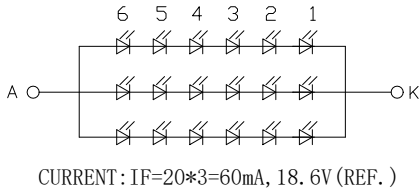

LCD Type	5.0" TFT, Transmissive Normally black IPS
Resolution	800(RGB)*480
View Direction	All o'clock
LCD driver IC	ST7262A
Colour depth	16.7M
Interface types	Lvds
Operating voltage	3.3V
With TP/Lens	without
Backlight	18 LEDs, 40mA(typ), 18.6V(ref.)
Surface luminance	500 cd/m ²
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x/y:

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A0	Initial release	2021.08.03

设计 (DESIGN)	Bill
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	



TITLE: LCM	页面 (Page) 1 / 1
Drawing No. TST050WVHS-92	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle)