
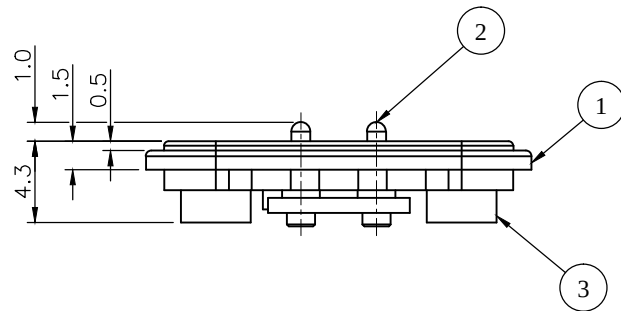


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2022/07/18

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 2A
 - 1.2 Voltage Rating: 12VDC
 - 1.3 Contact Resistance: 30mΩ
 - 1.4 When the current is more than 1A, then need to add a delay circuit 3 second
2. MECHANICAL
 - 2.1 Durability: 50,000 Cycle
 - 2.2 Pogo pin contact force: 50g±15g at 1.0mm work stroke, full stroke 1.2mm
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -30°C~+60°C

4	GLUE	LSR-67				
3	MAGNET	N52 NdFeB, Ni-Cu-Ni plating				
2	POGO PIN	Brass, 10u" gold plating				
1	HOUSING	PC RAL9003, White				
NO. PART NAME		DESCRIPTION				
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND				
UNIT:	DECIMAL		LINEAR	ANGLES		
	X.		±0.50	±5°		
	X.X		±0.25	±3°		
	X.XX		±0.12	±1°		
m m		www.attend.com.tw				
DRAWN	Tim	2022/07/18	DRAWN NAME: Pogo Pin, Magnet Type, 2Pin H5.3 Pitch 4.0, 10u", White			
CHECKED	Fros	2022/07/18				
APPROVED	Ken	2022/07/18				
		SCALE 1/1	SHEET 1/1	SIZE A4	PRODUCT NO.	303C-281220-40-02
					FILE NAME	303C-281220-40-02_B_1

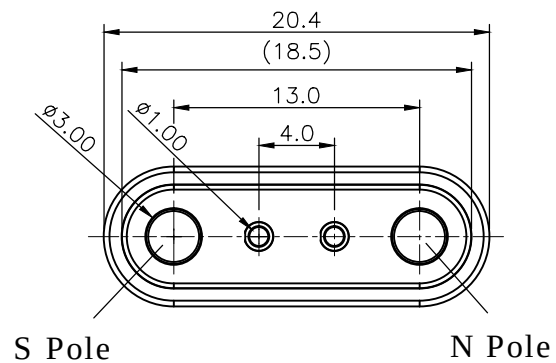

www.attend.com.tw