

SPECIFICATION

Current Rating: 2 AMP
 Insulation Resistance: 1000MΩ Min
 Dielectric Voltage: 1000V AC/minute
 Contact Resistance: 30mΩ Max
 Temperature Range: -40°C to +105°C

MATERIAL

Insulator: PBT + 30%G.F , UL94V-0
 Terminal: Copper Alloy

ORDER INFORMATION



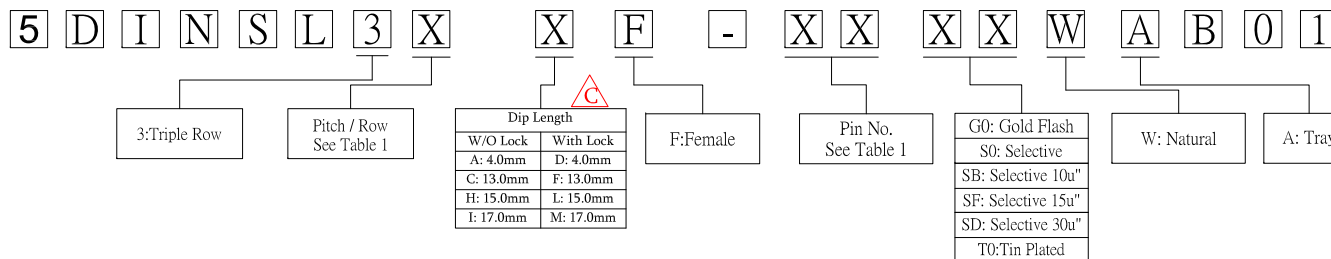


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSL3AXF-96 ***	96	2.54	A B C	
5DINSL3BXF-64 ***	64		A B -	
5DINSL3CXF-64 ***	64		A - C	
5DINSL3DXF-32 ***	32		A - -	
5DINSL3EXF-48 ***	48	5.08	A B C	
5DINSL3FXF-32 ***	32		A B -	
5DINSL3GXF-32 ***	32		A - C	
5DINSL3HXF-16 ***	16		A - -	

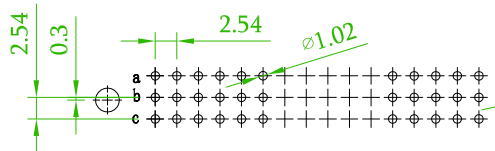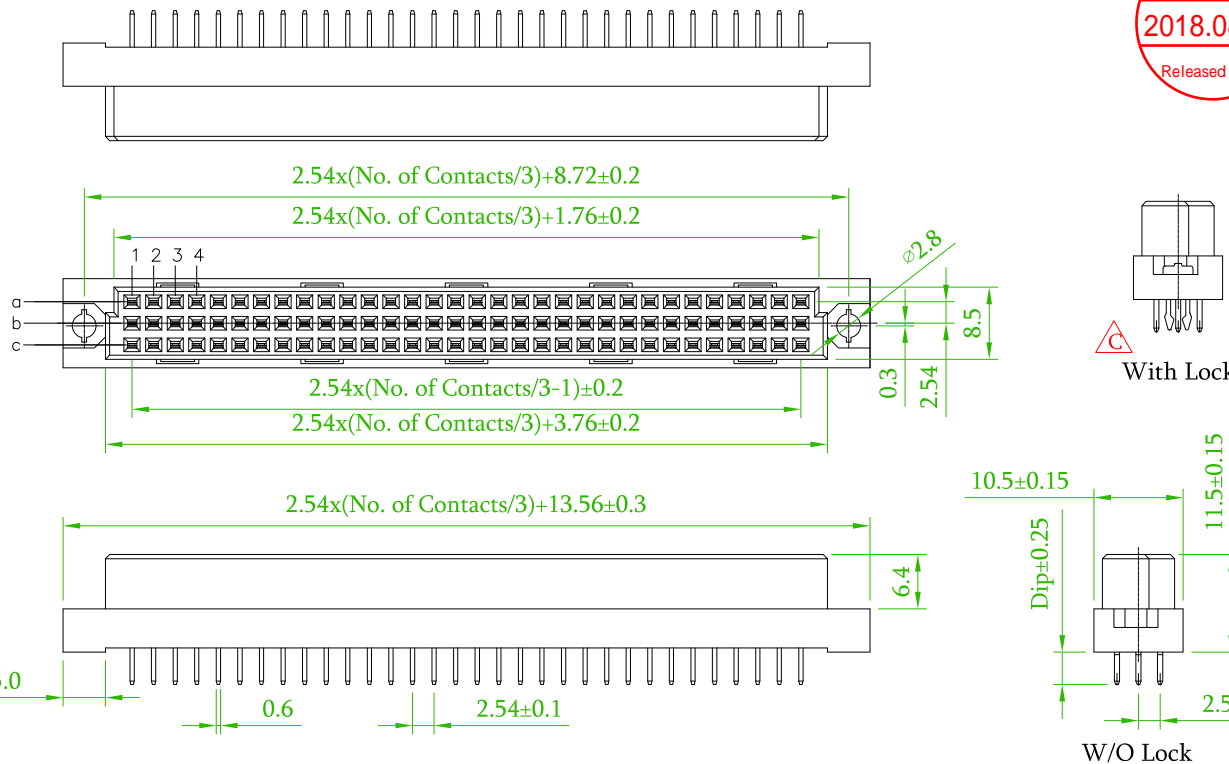

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old P/N: DINLS-F3XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x2	Add a type: With Lock.	Gary	2018/08/02
B x1	Revise the Table 1.	Roy	2018/05/10

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	DIN 41612 3-R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5DINSL3XXF-XXXXWAB01				繪圖 DRAWN	Roy 2016/09/05
圖號 DRAWING NO.	GN087-RR464		版本 REV.	C	核對 CHECKED	Josh 2018/08/02
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/08/02
公差 TOLERANCE	.X ±0.30	.XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	