



HUIYUAN ELECTRONIC CO.,LTD.
慧源电子有限公司

TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5003G6D-PLS

Features

- Low Power consumption
- General purpose leads
- Selected minimum intensities
- Available on tape and reel
- Pb free



Descriptions

- The LED lamps are available with different colors, intensities, epoxy colors, etc

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Status indicators
- Commercial use
- Advertising Signs




TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5003G6D-PLS

Device Selection Guide

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
5003G6D-PLS	AlGaInP	Green	Color Diffused

Package Dimensions

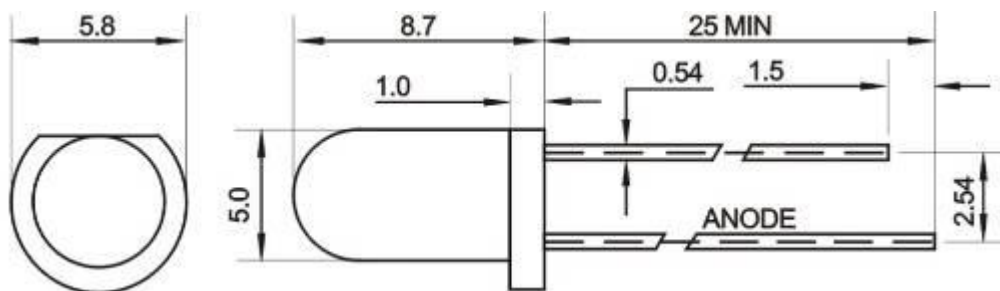

Notes:

Other dimensions are in millimeters, tolerance is 0.25mm except being specified.

Protruded resin under flange is 1.5mm Max LED.

Bare copper alloy is exposed at tie-bar portion after cutting.

ADD: Yuanshanzai Industrial Park, Xinchang, Tangxia Jiangmen, Guangdong, China. 529085

Tel: +86 750 3599880 Fax: +86 750 3599848

E-mail: hyled@hyledchina.com ;

Homepage: <http://www.hyledchina.com> ;



TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5003G6D-PLS

Absolute Maximum Rating ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Pulse Current	I_{FPM}	100	mA
Forward Current	I_{FM}	30	mA
Reverse Voltage	V_{R}	5	V
Power Dissipation	P_{D}	140	mW
Operating Temperature	T_{opr}	-40~+80	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40~+100	$^\circ\text{C}$
Soldering Heat (5s)	T_{sol}	260	$^\circ\text{C}$

Electro-Optical Characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_{v}	20	---	40	mcd	IF=20mA(Note1)
Viewing Angle	$2\theta_{1/2}$		40		Deg	(Note 2)
Peak Emission Wavelength	λ_{p}	565	570	575	nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$	15	20	25	nm	IF=20mA
Forward Voltage	V_{F}	1.9	---	2.3	V	IF=20mA
Reverse Current	I_{R}	---	---	10	μA	VR=5V

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.



TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5003G6D-PLS

Typical Electro-Optical Characteristics Curves

