

ORDER INFORMATION




5 P H 2 R D A 2 0 - 1 X X X X N N X U - A B C - 0 0

SPECIFICATIONS

Current Rating :2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature:-40°C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

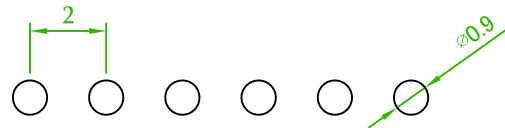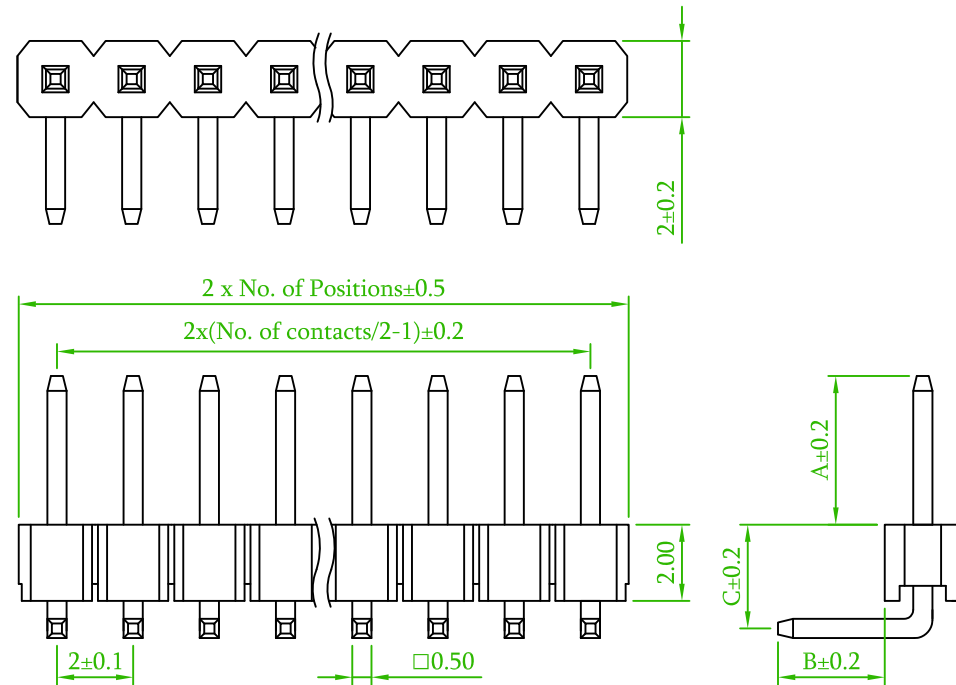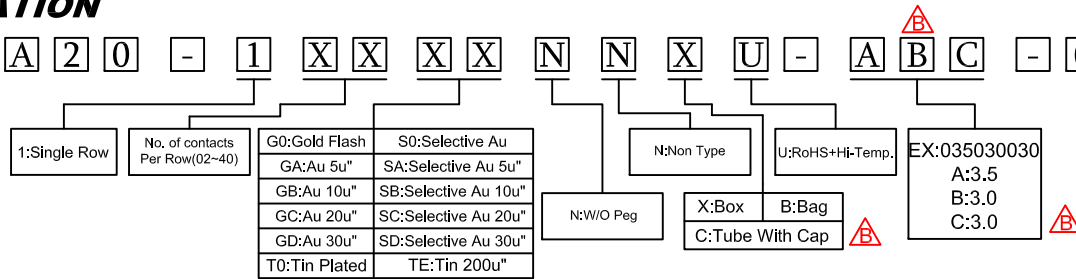

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH2R20-1XX-U

REV.	Modify order information	B	2017/02/06 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm S/R/ R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH2RDA20-1XXXXNXXU -XXXXXXXXXX-00		繪圖 DRAWN	Mia 2016/09/21	
圖號 DRAWING NO.	GW001-GA263	版本 REV.	B	核對 CHECKED	Jonny 2016/09/21
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/21
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	