

SPECIFICATION






Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 1 D R A 2 5 - 1 X X X X N N X U - A L 1 B - 0 0

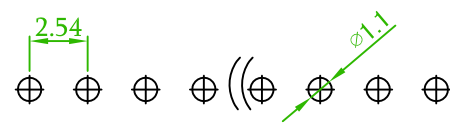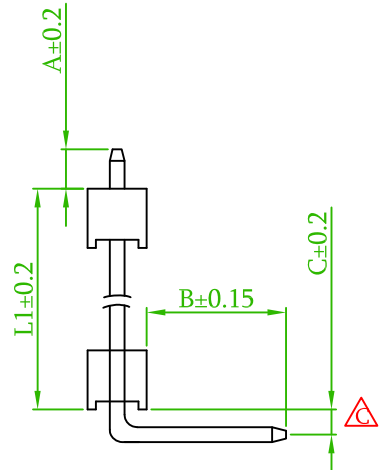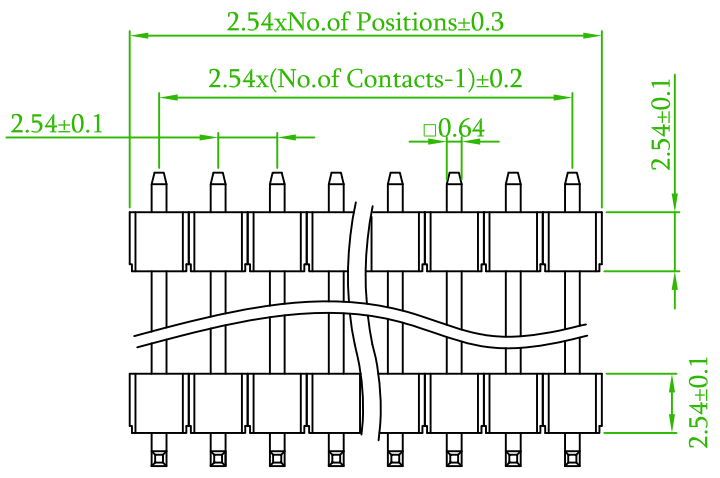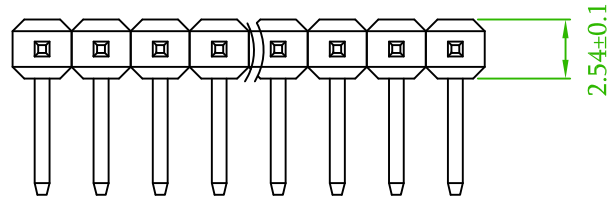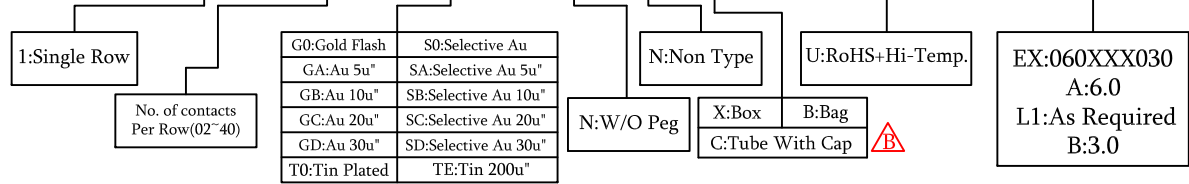

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH1RDD-1XX-U

△x1	Revsie the Drawing	Daniel	2019/06/03
△x3	Modify order information	Gary	2017/01/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1DRA25-1XXXXNXXU -XXXXXXXXXX-00			繪圖 DRAWN	Jeff 2016/09/19	
圖號 DRAWING NO.	GN016-GA119	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		