
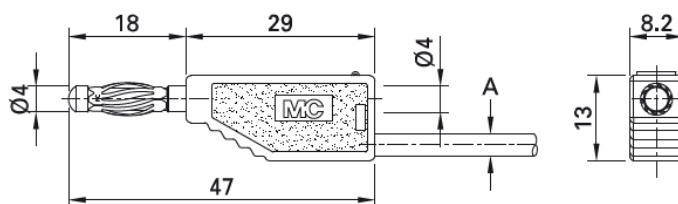


Plug SLS4...

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.

Solder connection.

SLS410



Order No.	Type	Rated voltage/current	Cable (A)		*Colors																	
22.2626-*	SLS410	30 VAC / 19 A 60 VDC / 19 A	<table border="1"> <tr> <td>PVC</td> <td>TPE</td> <td>Ø 2.7 mm</td> <td rowspan="2">1.0 mm²</td> </tr> <tr> <td>SIL</td> <td></td> <td>Ø 3.0 mm</td> </tr> </table>	PVC	TPE	Ø 2.7 mm	1.0 mm ²	SIL		Ø 3.0 mm	Au	<table border="1"> <tr> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	20	21	22	23	24	25	26	27	28	29
PVC	TPE	Ø 2.7 mm	1.0 mm ²																			
SIL		Ø 3.0 mm																				
20	21	22	23	24																		
25	26	27	28	29																		

Component parts

22.2140-*	KT410	Insulator for SLS410, SLS410N
22.1010	LS410	Plug for SLS410, SLS425-A



Assembly instructions MA110

www.staubli.com/electrical