

### SPECIFICATIONS




Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### MATERIAL



Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

### ORDER INFORMATION

5 P H 1 D D A 2 5 - 1 X X X X N N X U - A L 1 B - 0 0

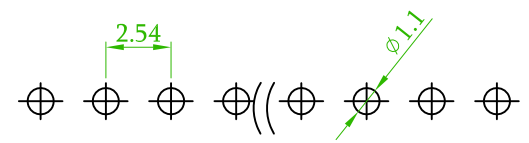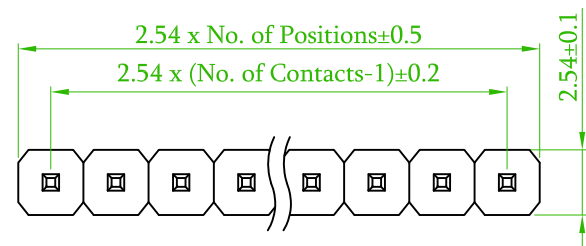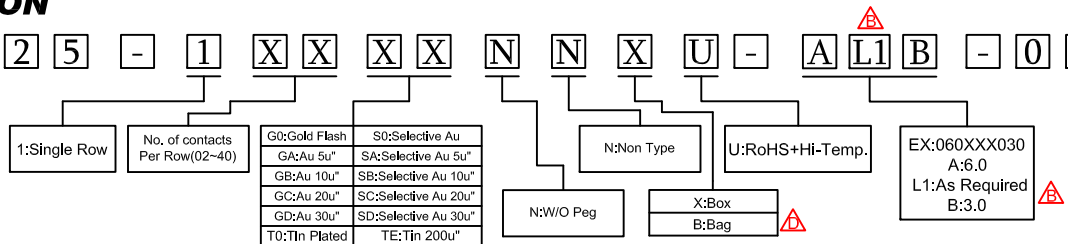

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

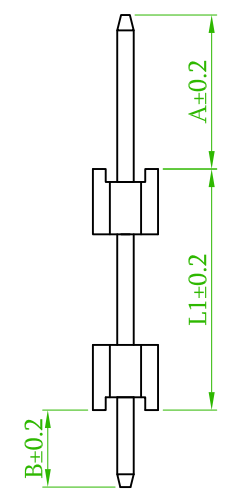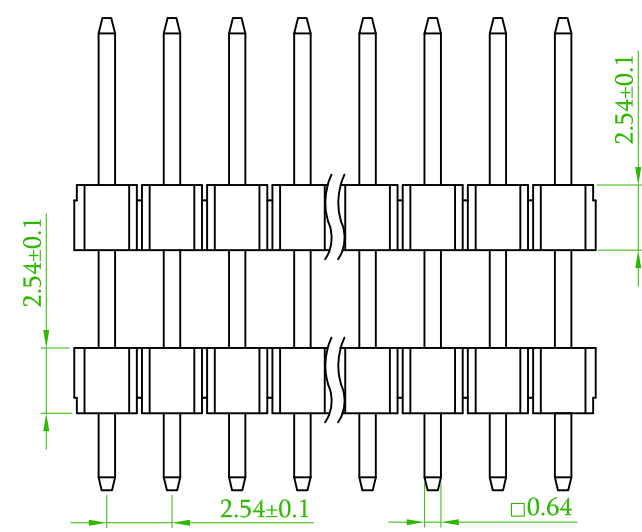

Old Part No. :PH1D25-1XX-U

△	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/22
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△	Modify order information	Gary	2017/01/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1DDA25-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/17
圖號 DRAWING NO.	GN016-GA111	版本 REV.	D	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	