

SPECIFICATIONS



Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL 94V-0,Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 3 S D A 1 0 - 2 X X X X N N X U - A B 000 - 0 0

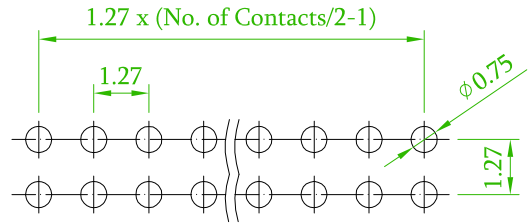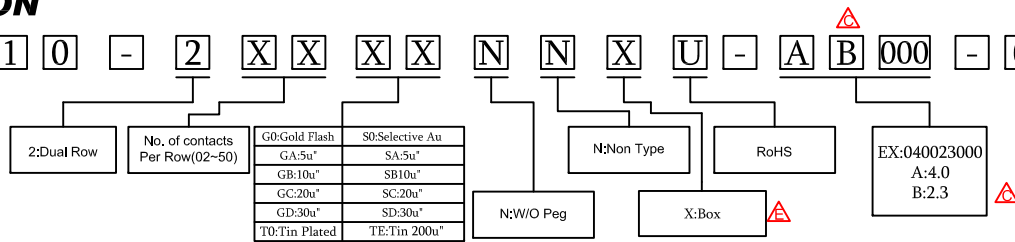

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

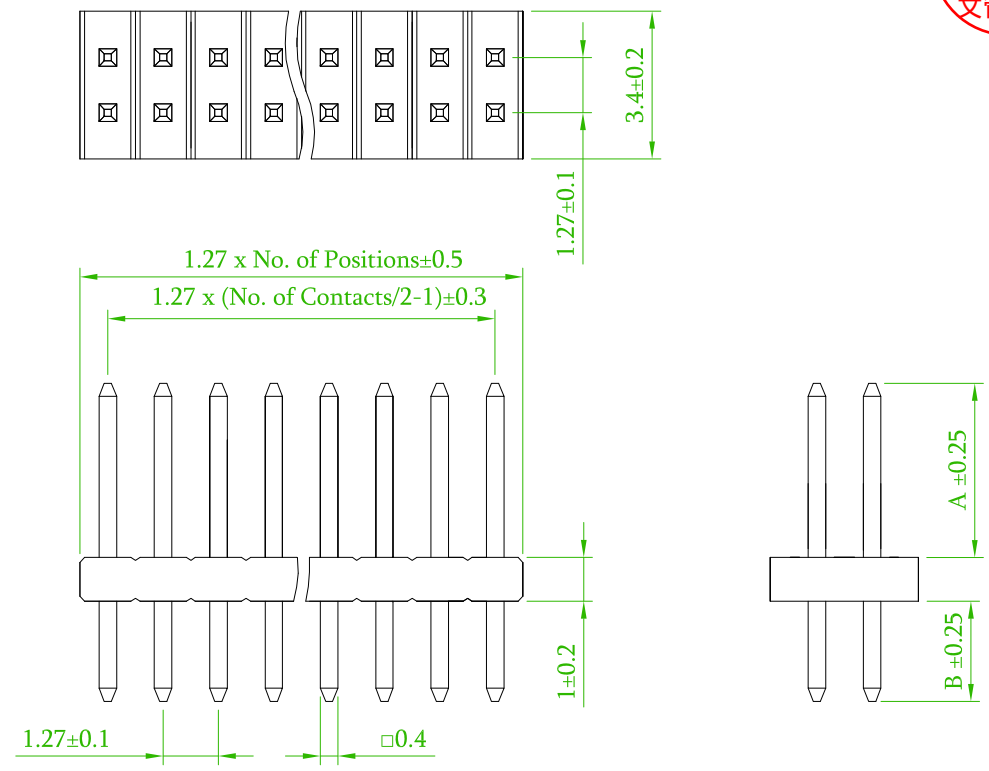

Old Part No. : PH3S10-2XX-U

△x1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
△x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/19
△x3	Modify order information	Gary	2017/02/07
△	Added Cap Size	Joey	2016/08/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3SDA10- 2XXXXNXXU-XXXXXX000-00			繪圖 DRAWN	Roy 2015/08/18	
圖號 DRAWING NO.	GN016-GA295	版本 REV.	E	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		