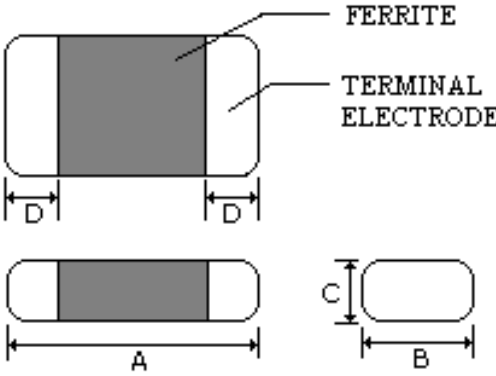


# SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:			
PART NO: LCB4516-600Y-N				DWG.NO: ME3251616			
CUSTOMER PART NO:				CUST.DWG.NO:			
<p>(1) DIMENSIONS (UNIT: mm)</p> 				A	$4.5 \pm 0.2$	m/m	
				B	$1.6 \pm 0.2$	m/m	
				C	$1.6 \pm 0.2$	m/m	
				D	$0.6 \sim 1.0$	m/m	
				E		m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
				(2) ELECTRICAL REQUIREMENTS			
Z ( $\Omega$ )	$60 \pm 25\%$	TEST FREQ	100MHz / 500mV				
RDC ( $\Omega$ )	0.008 (MAX)	TEST FREQ					
IDC (mA)	6000 (MAX)	TEST FREQ					
TEST INSTRUMENTS HP-4286A HP4338				APPROVED BY 吳載敏			
				CHECKED BY 張明德			
				DRAWN BY 黃慧診			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :				DATE :						
PART NO: LCB4516-600Y-N				DWG.NO: ME3251616						
CUSTOMER PART NO :				CUST.DWG.NO :						
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)	DIMENSION (UNIT : mm)						
FREQ	100MHz /500mV									
SPEC	60 ± 25%	0.008 (MAX)	6000 (MAX)							
1	61.52	0.004	OK							
2	58.38	0.005	OK							
3	48.89	0.004	OK							
4	47.55	0.005	OK							
5	49.03	0.005	OK							
6	61.90	0.005	OK							
7	57.42	0.005	OK							
8	48.14	0.004	OK							
9	61.31	0.005	OK							
10	51.45	0.004	OK							
$\bar{X}$	54.56	0.005								
R	14.35	0.001								
							APPROVED BY			
							吳載敏			
							CHECKED BY			
							張明德			
							DRAWN BY			
							黃慧診			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# LCB4516-600Y-N

